



**Technical features**



601501P

# PROMENADE ROUND 01

27.56" height bollard, round shape, for outdoor surface installation, 360° downward light emission, phospho-chromatised and polyester powder coated extruded aluminum body and die-cast aluminum cover. Polycarbonate Fresnel diffuser, molded silicone gasket and stainless steel screws. Anchorage flange with threaded bolts included. Built-in LED driver 120-277VAC 50-60Hz, with 1 x COB CREE "CXB 1520" LED. IP66 rating.

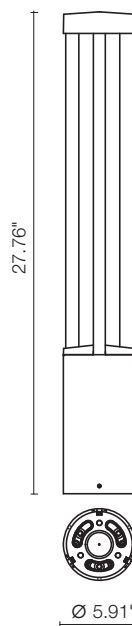

**Technical data**

|              |  |
|--------------|--|
| Wattage      | 26W  |
| IP Rating    | IP66   |
| IK Rating    | IK10   |
| Material     | High corrosion resistance die-cast copper-free aluminum body |
| Coating      | Polyester powder coating with phosphochromating pre-finish   |
| Light source | NR. 1 COB CREE "CXB 1520" LED                                |
| Screws       | Stainless steel  |
| Transformer  | Electronic power supply 120-277VAC 50/60Hz built-in          |
| Gasket       | Silicone rubber  |
| Glass        | Tempered   |
| Cable gland  | M16 rubber grommet   |
| Power cable: | not included   |
| Gross weight | 14.33 lbs  |

AC053 - Base Plate



| light source                | light beam options                       | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--|-------------------|------------------------|
| <b>3000°K warm-white</b>    |  |                   |                        |
| cob led                     | <input checked="" type="checkbox"/> 360° | 2,900             | 111.54                 |
| <b>4000°K neutral-white</b> |  |                   |                        |
| cob led                     | <input checked="" type="checkbox"/> 360° | 3,100             | 119.23                 |

**Finish color options:**

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)




**Technical features**



601502P

# PROMENADE ROUND 02

39.37" height bollard, round shape, for outdoor surface installation, 360° downward light emission, phospho-chromatised and polyester powder coated extruded aluminum body and die-cast aluminum cover. Polycarbonate Fresnel diffuser, molded silicone gasket and stainless steel screws. Anchorage flange with threaded bolts included. Built-in LED driver 120-277VAC 50-60Hz, with 1 x COB CREE "CXB 1520" LED. IP66 rating.

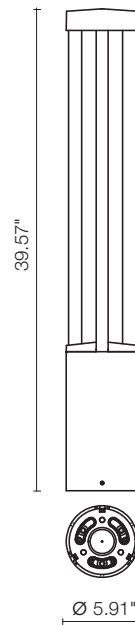

**Technical data**

|              |  |
|--------------|--|
| Wattage      | 26W  |
| IP Rating    | IP66   |
| IK Rating    | IK10   |
| Material     | High corrosion resistance die-cast copper-free aluminum body |
| Coating      | Polyester powder coating with phosphochromating pre-finish   |
| Light source | NR. 1 COB CREE "CXB 1520" LED                                |
| Screws       | Stainless steel  |
| Transformer  | Electronic power supply 120-277VAC 50/60Hz built-in          |
| Gasket       | Silicone rubber  |
| Glass        | Tempered   |
| Cable gland  | M16 rubber grommet   |
| Power cable: | not included   |
| Gross weight | 15.43 lbs  |

AC053 - Base Plate



| light source                | light beam options                       | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--|-------------------|------------------------|
| <b>3000°K warm-white</b>    |  |                   |                        |
| cob led                     | <input checked="" type="checkbox"/> 360° | 2,900             | 111.54                 |
| <b>4000°K neutral-white</b> |  |                   |                        |
| cob led                     | <input checked="" type="checkbox"/> 360° | 3,100             | 119.23                 |

**Finish color options:**

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)




**Technical features**



**601503P**

# PROMENADE SQUARE 01

27.56" height bollard, square shape, for outdoor surface installation, 360° downward light emission, phospho-chromatised and polyester powder coated extruded aluminum body and die-cast aluminum cover. Polycarbonate Fresnel diffuser, molded silicone gasket and stainless steel screws. Anchorage flange with threaded bolts included. Built-in LED driver 120-277VAC 50-60Hz, with 1 x COB CREE "CXB 1520" LED. IP66 rating.

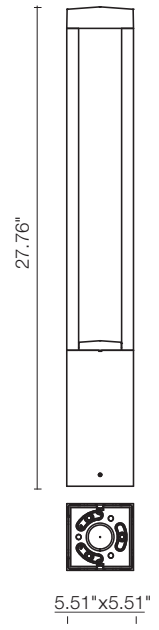

**Technical data**

|              |  |
|--------------|--|
| Wattage      | 26W  |
| IP Rating    | IP66   |
| IK Rating    | IK10   |
| Material     | High corrosion resistance die-cast copper-free aluminum body |
| Coating      | Polyester powder coating with phosphochromating pre-finish   |
| Light source | NR. 1 COB CREE "CXB 1520" LED                                |
| Screws       | Stainless steel  |
| Transformer  | Electronic power supply 120-277VAC 50/60Hz built-in          |
| Gasket       | Silicone rubber  |
| Glass        | Tempered   |
| Cable gland  | M16 rubber grommet   |
| Power cable: | not included   |
| Gross weight | 14.99 lbs  |

| light source                | light beam options                       | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--|-------------------|------------------------|
| <b>3000°K warm-white</b>    |  |                   |                        |
| cob led                     | <input checked="" type="checkbox"/> 360° | 2,900             | 111.54                 |
| <b>4000°K neutral-white</b> |  |                   |                        |
| cob led                     | <input checked="" type="checkbox"/> 360° | 3,100             | 119.23                 |

**Finish color options:**





601504P

## PROMENADE SQUARE 02

39.37" height bollard, square shape, for outdoor surface installation, 360° downward light emission, phospho-chromatised and polyester powder coated extruded aluminum body and die-cast aluminum cover. Polycarbonate Fresnel diffuser, molded silicone gasket and stainless steel screws. Anchorage flange with threaded bolts included. Built-in LED driver 120-277VAC 50-60Hz, with 1 x COB CREE "CXB 1520" LED. IP66 rating.

| light source                | light beam options                       | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--|-------------------|------------------------|
| <b>3000°K warm-white</b>    |  |                   |                        |
| cob led                     | <input checked="" type="checkbox"/> 360° | 2,900             | 111.54                 |
| <b>4000°K neutral-white</b> |  |                   |                        |
| cob led                     | <input checked="" type="checkbox"/> 360° | 3,100             | 119.23                 |

### Finish color options:

- Textured Grey  
RAL 9006
- Anthracite Grey  
RAL 7016
- Matt Black  
(on request)



### Technical features

IP66 IK10

### Technical data

|              |  |
|--------------|--|
| Wattage      | 26W  |
| IP Rating    | IP66   |
| IK Rating    | IK10   |
| Material     | High corrosion resistance die-cast copper-free aluminum body |
| Coating      | Polyester powder coating with phosphochromating pre-finish   |
| Light source | NR. 1 COB CREE "CXB 1520" LED                                |
| Screws       | Stainless steel  |
| Transformer  | Electronic power supply 120-277VAC 50/60Hz built-in          |
| Gasket       | Silicone rubber  |
| Glass        | Tempered   |
| Cable gland  | M16 rubber grommet   |
| Power cable: | not included   |
| Gross weight | 16.09 lbs  |

AC053 - Base Plate

