


QUAD

INDOOR RECESSED DOWNLIGHTS
FALSE CEILINGS IN RETAIL SPACES AND PRIVATE HOMES


2700K 3000K 4000K 5000K blue RGB



2700K 3000K 4000K



2700K 3000K 4000K




WITHOUT FRAME

CONSTANT CURRENT

CONSTANT CURRENT

CONSTANT CURRENT

SINGLE BEAM



QUAD 6.1
6W 500mA




QUAD MAXI 2.1
8W 500mA



QUAD MAXI 4.1
14W 350mA

DOUBLE BEAM



QUAD 6.2
12W 500mA



QUAD MAXI 2.2
14.5W 500mA



QUAD MAXI 4.2
26W 700mA

3 BEAMS



QUAD 6.3
18W 500mA





QUAD MAXI 2.3
22W 500mA



QUAD MAXI 4.3
40W 1050mA



**QUAD
RECESSED**




WITH FRAME

CONSTANT CURRENT

CONSTANT CURRENT

SINGLE BEAM




QUAD MAXI 1.1
8W 500mA



QUAD MAXI 3.1
14W 350mA

DOUBLE BEAM



QUAD MAXI 1.2
14.5W 500mA



QUAD MAXI 3.2
26W 700mA

3 BEAMS



QUAD MAXI 1.3
22W 500mA



QUAD MAXI 3.3
40W 1050mA

QUAD 6

v


QUAD 6.1

3000K, 6W, 56°, white

Project by / Nini Andrade Silva
Light planning by / Light 2 Life, Lighting Design
WC Beautique Hotel, Lisbon, Portugal



QUAD 6.1

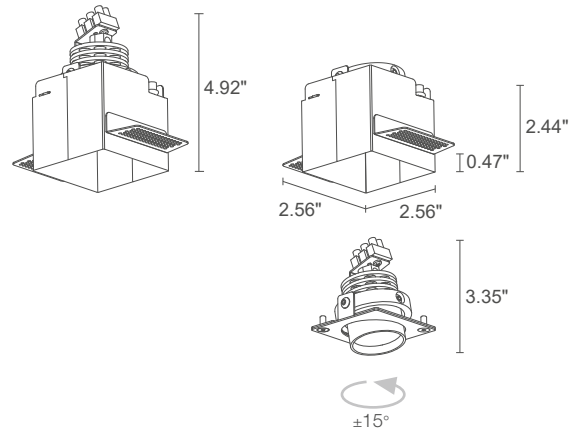

Required outer casing, not included



POWER / POWER SUPPLY
MODEL NO.

6W 500mA
QD6132 ■ ■ **B** White
QD6132 ■ ■ **N** Black

■ **LED COLOR**

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue
6 - RGB

■ **OPTICS**

S - 12° tiltable ±15°
M - 24° tiltable ±15°
L - 56° tiltable ±15°

LUMEN OUTPUT AT SOURCE

436 lm (3000K, 500mA)
RGB: 294 lm, R: 108 lm G: 140 lm
B: 46 lm (500mA)

DELIVERED LUMEN OUTPUT

336 lm (3000K, 500mA, 24°)
RGB: 210 lm, R: 77 lm G: 100 lm
B: 33 lm (500mA, 24°)

NO. AND TYPE OF LED

3 power LEDs
1/4 ANSI BIN (white LED color)
50,000h L90 B10 (Ta 25°C)

MATERIAL

body in anodized aluminum
trim in steel

POWER SUPPLY UNIT

remote power supply required, not included

POWER CABLES

terminal block

WIRING

series

MOUNTING


recessed (ceiling)

ACCESSORIES

see accessories page



QUAD 6.2

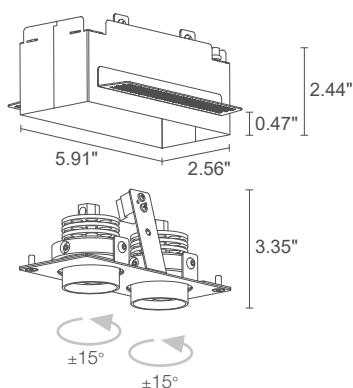

Required outer casing, not included



IP40

12W 500mA
QD6262 ■ ■ **B** White
QD6262 ■ ■ **N** Black

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue
6 - RGB

S - 12° tiltable ±15°
M - 24° tiltable ±15°
L - 56° tiltable ±15°

436 lm (3000K, 500mA) per beam
 RGB: 294 lm, R: 108 lm G: 140 lm
 B: 46 lm (500mA) per beam

336 lm (3000K, 500mA, 24°) per beam
 RGB: 210 lm, R: 77 lm G: 100 lm
 B: 33 lm (500mA, 24°) per beam

6 power LEDs
 1/4 ANSI BIN (white LED color)
 50,000h L90 B10 (Ta 25°C)

body in anodized aluminum
 trim in steel

remote power supply required, not included

terminal block


series

recessed (ceiling)

see accessories page



QUAD 6.3

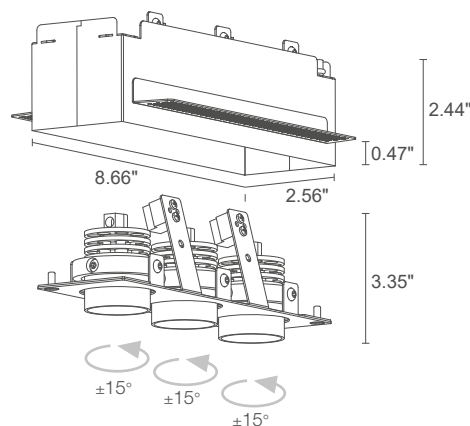

Required outer casing, not included



IP40

18W 500mA
QD6392 ■ ■ **B** White
QD6392 ■ ■ **N** Black

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue
6 - RGB

S - 12° tiltable ±15°
M - 24° tiltable ±15°
L - 56° tiltable ±15°

436 lm (3000K, 500mA) per beam
 RGB: 294 lm, R: 108 lm G: 140 lm
 B: 46 lm (500mA) per beam

336 lm (3000K, 500mA, 24°) per beam
 RGB: 210 lm, R: 77 lm G: 100 lm
 B: 33 lm (500mA, 24°) per beam

9 power LEDs
 1/4 ANSI BIN (white LED color)
 50,000h L90 B10 (Ta 25°C)

body in anodized aluminum
 trim in steel

remote power supply required, not included

terminal block

series

recessed (ceiling)

see accessories page


QUAD MAXI 1

✓
QUAD MAXI 1.1
4000K, 8W, 29°

Light planning by / Studio Luce Sacchi
Sordi Gioielli, Varedo, Monza and Brianza, Italy



QUAD MAXI 1.1



6.89" x 6.89"
H 5.91" 2.95" x 2.95"

0.66 lbs IP40 IP43
installed

POWER / POWER SUPPLY
MODEL NO.



8W 500mA
MQ1110 ■ ■ ■ White

■ LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
■ OPTICS	S - 20° tilttable ±15° M - 29° tilttable ±15° L - 54° tilttable ±15°
LUMEN OUTPUT AT SOURCE	512 lm (3000K)
DELIVERED LUMEN OUTPUT	425 lm (3000K, 29°)
NO. AND TYPE OF LED	1 multichip power LED 2-step MacAdam, 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in steel
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98' cable
MOUNTING	recessed (ceiling)







QUAD MAXI 1.2



14.5W 500mA
MQ1210 ■ ■ ■ B White



QUAD MAXI 1.3

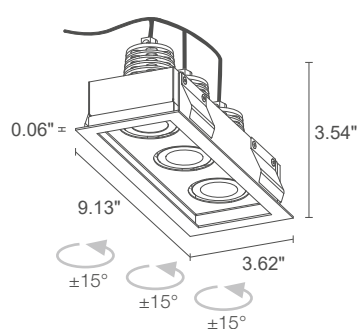

22W 500mA
MQ1310 ■ ■ ■ B White

■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 20° tiltable ±15° M - 29° tiltable ±15° L - 54° tiltable ±15°
512 lm (3000K) per beam	
425 lm (3000K, 29°) per beam	
2 multichip power LEDs 2-step MacAdam, 50,000h L90 B10 (Ta 25°C)	
body in anodized aluminum trim in steel	
remote power supply required, not included	
includes 0.98' cable	
recessed (ceiling)	


■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 20° tiltable ±15° M - 29° tiltable ±15° L - 54° tiltable ±15°
512 lm (3000K) per beam	
425 lm (3000K, 29°) per beam	
3 multichip power LEDs 2-step MacAdam, 50,000h L90 B10 (Ta 25°C)	
body in anodized aluminum trim in steel	
remote power supply required, not included	
includes 0.98' cable	
recessed (ceiling)	

QUAD MAXI 2


✓
QUAD MAXI 2.1
3000K, 8W, 29°



QUAD MAXI 2.1

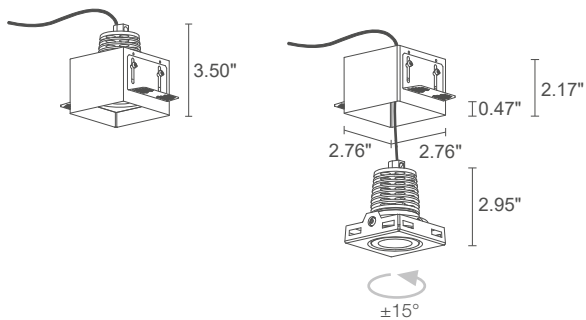

Required outer casing, not included



POWER / POWER SUPPLY
MODEL NO.


8W 500mA
MQ2110 ■ ■ **B** White

■ LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
■ OPTICS	S - 20° tilttable ±15° M - 29° tilttable ±15° L - 54° tilttable ±15°
LUMEN OUTPUT AT SOURCE	512 lm (3000K)
DELIVERED LUMEN OUTPUT	425 lm (3000K, 29°)
NO. AND TYPE OF LED	1 multichip power LED 2-step MacAdam, 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in steel
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98' cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page






QUAD MAXI 2.2

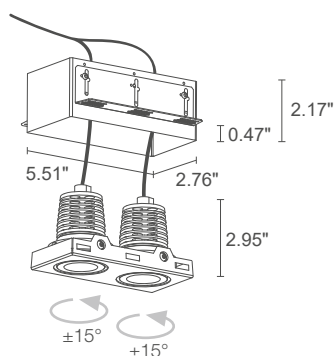


Required outer casing, not included




14.5W 500mA
MQ2210 ■ ■ ■ White



QUAD MAXI 2.3

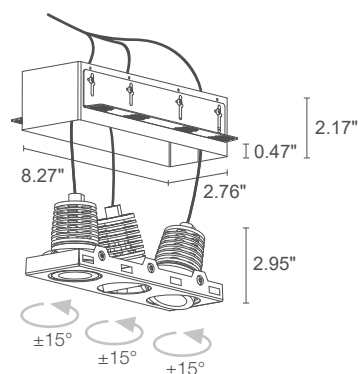

Required outer casing, not included



22W 500mA
MQ2310 ■ ■ ■ White



■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 20° tilttable ±15° M - 29° tilttable ±15° L - 54° tilttable ±15°
512 lm (3000K) per beam	
425 lm (3000K, 29°) per beam	
2 multichip power LEDs 2-step MacAdam, 50,000h L90 B10 (Ta 25°C)	
body in anodized aluminum trim in steel	
remote power supply required, not included	
includes 0.98' cable	
recessed (ceiling)	
see accessories page	

■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 20° tilttable ±15° M - 29° tilttable ±15° L - 54° tilttable ±15°
512 lm (3000K) per beam	
425 lm (3000K, 29°) per beam	
3 multichip power LEDs 2-step MacAdam, 50,000h L90 B10 (Ta 25°C)	
body in anodized aluminum trim in steel	
remote power supply required, not included	
includes 0.98' cable	
recessed (ceiling)	
see accessories page	

QUAD MAXI 3



QUAD MAXI 3.1





POWER / POWER SUPPLY	14W 350mA
MODEL NO.	MQ3110 ■ ■ ■ B White

■ LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
■ OPTICS	M - 20° tilttable ±15° L - 40° tilttable ±15°
LUMEN OUTPUT AT SOURCE	1219 lm (3000K)
DELIVERED LUMEN OUTPUT	950 lm (3000K, 20°)
NO. AND TYPE OF LED	1 multichip power LED 2-step MacAdam, 50,000h L85 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in steel
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98' cable
MOUNTING	recessed (ceiling)






QUAD MAXI 3.2

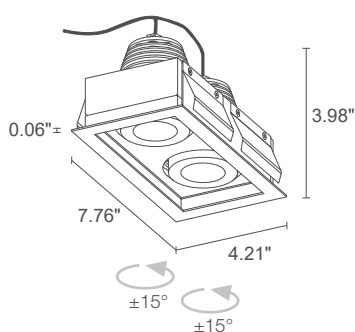

26W 700mA
MQ3210 ■ ■ B White



QUAD MAXI 3.3

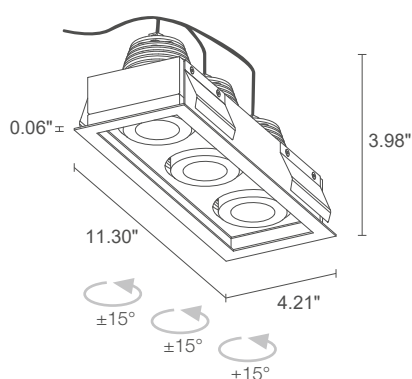

40W 1050mA
MQ3310 ■ ■ B White

■	F - 2700K 5 - 3000K 9 - 4000K
■	M - 20° tilttable ±15° L - 40° tilttable ±15°
1219 lm (3000K) per beam	
950 lm (3000K, 20°) per beam	
2 multichip power LEDs 2-step MacAdam, 50,000h L85 B10 (Ta 25°C)	
body in anodized aluminum trim in steel	
remote power supply required, not included	
includes 0.98' cable	
recessed (ceiling)	


■	F - 2700K 5 - 3000K 9 - 4000K
■	M - 20° tilttable ±15° L - 40° tilttable ±15°
1219 lm (3000K) per beam	
950 lm (3000K, 20°) per beam	
3 multichip power LEDs 2-step MacAdam, 50,000h L85 B10 (Ta 25°C)	
body in anodized aluminum trim in steel	
remote power supply required, not included	
includes 0.98' cable	
recessed (ceiling)	

QUAD MAXI 4




QUAD MAXI 4.1

✓
QUAD MAXI 4.1
3000K, 14W, 20°
Interior design by / Cristian Turra
Private residence, Iseo, Brescia, Italy

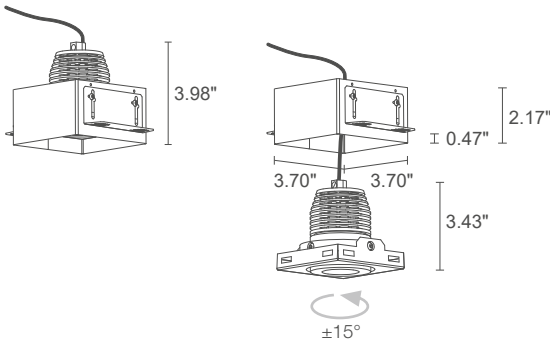

Required outer casing, not included




POWER / POWER SUPPLY	14W 350mA
MODEL NO.	MQ4110 ■ ■ B White


■ LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
■ OPTICS	M - 20° tilttable ±15° L - 40° tilttable ±15°
LUMEN OUTPUT AT SOURCE	1219 lm (3000K)
DELIVERED LUMEN OUTPUT	950 lm (3000K, 20°)
NO. AND TYPE OF LED	1 multichip power LED 2-step MacAdam, 50,000h L85 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in steel
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98' cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page



QUAD MAXI 4.2

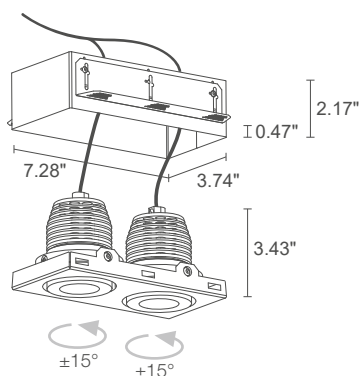


Required outer casing, not included




26W 700mA
MQ4210 ■ ■ ■ B White



QUAD MAXI 4.3

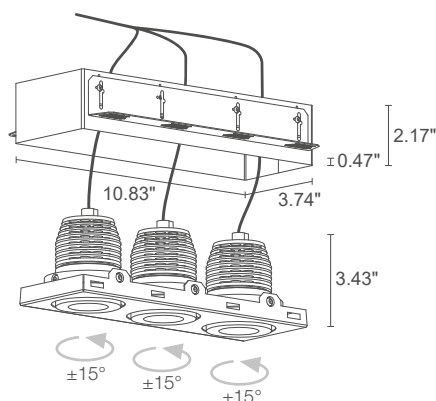

Required outer casing, not included



40W 1050mA
MQ4310 ■ ■ ■ B White

■	F - 2700K 5 - 3000K 9 - 4000K
■	M - 20° tilttable ±15° L - 40° tilttable ±15°
1219 lm (3000K) per beam	
950 lm (3000K, 20°) per beam	
2 multichip power LEDs 2-step MacAdam, 50,000h L85 B10 (Ta 25°C)	
body in anodized aluminum trim in steel	
remote power supply required, not included	
includes 0.98' cable	
recessed (ceiling)	
see accessories page	

■	F - 2700K 5 - 3000K 9 - 4000K
■	M - 20° tilttable ±15° L - 40° tilttable ±15°
1219 lm (3000K) per beam	
950 lm (3000K, 20°) per beam	
3 multichip power LEDs 2-step MacAdam, 50,000h L85 B10 (Ta 25°C)	
body in anodized aluminum trim in steel	
remote power supply required, not included	
includes 0.98' cable	
recessed (ceiling)	
see accessories page	

QUAD

ACCESSORIES

ACCESSORIES FOR INSTALLATION



WC2001

Outer casing for plasterboard
(Quad 6.1)




WC2002

Outer casing for plasterboard
(Quad 6.2)




WC2003

Outer casing for plasterboard
(Quad 6.3)




WC2201

Outer casing for plasterboard
(Quad Maxi 2.1)



WC2202

Outer casing for plasterboard
(Quad Maxi 2.2)



WC2203

Outer casing for plasterboard
(Quad Maxi 2.3)



WC2401

Outer casing for plasterboard
(Quad Maxi 4.1)



WC2402

Outer casing for plasterboard
(Quad Maxi 4.2)



WC2403


Outer casing for plasterboard
(Quad Maxi 4.3)

QUAD


INDOOR RECESSED

QUAD 6.1


S - 12°

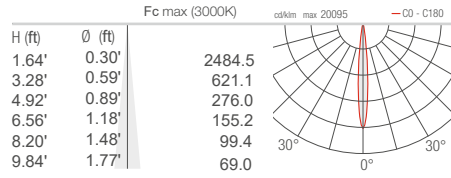

M - 24°

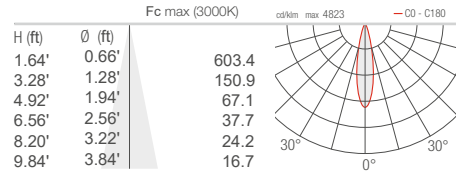


L - 56°

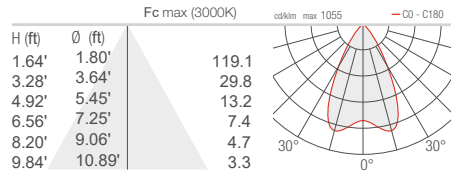


QUAD MAXI 1.1 2.1


S - 20°

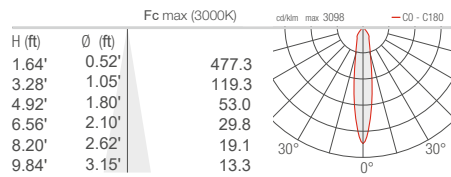

M - 29°

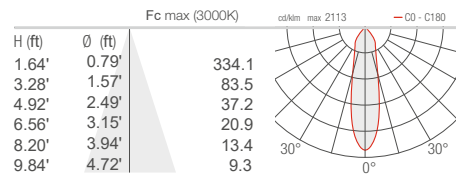


L - 54°

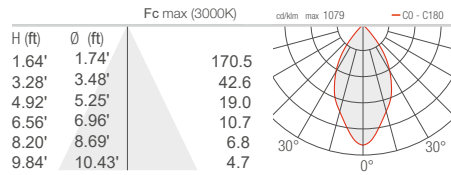

QUAD MAXI 3.1 4.1

M - 20°

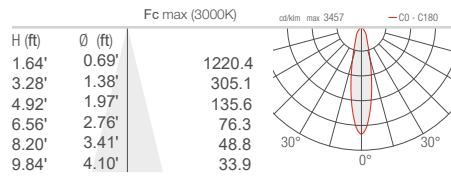

L - 40°

