

River is a family of outdoor recessed linear profile fixtures for installation in floors or walls. The family is available in static white, blue or RGBW with a variety of optics options. River 1.0 is available in static white and blue versions with 4 optic options. Drive-over rated to 4,400 lbs.


## TECHNICAL DATA

<b>Wattage / Input</b>	20W (120VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body: Anodized Aluminum Alloy EN AW 6060 Lens: Tempered, Transparent Glass Cable Length: 4.92'
<b>CCT</b>	2700K, 3000K, 4000K, 5000K, Blue
<b>CRI</b>	>80
<b>Delivered Lumens</b>	1050 lm (3000K, 30°)
<b>Efficacy</b>	52.5 lm/W (3000K, 30°)
<b>Optics</b>	11°, 30°, 47°, 10°x40°
<b>Finishes</b>	N/A
<b>Fixture Dimensions</b>	19.69" l x 2.20" w x 4.57" h LED Spacing: 1.97"
<b>Fixture Weight</b>	7.39 lbs
<b>LED Source</b>	10 Power LEDs
<b>Lumen Maintenance</b>	L80 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP67
<b>IK Rating</b>	IK09
<b>Driverover</b>	4,409 lbs



Cutout Dimensions  
for Installation = 2.48" x 19.76"

Fixture Dimensions

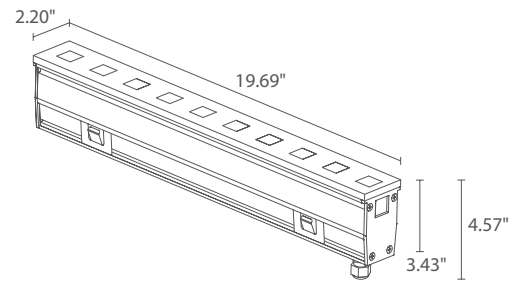

**OUTER CASING REQUIRED**

## ORDERING INFORMATION

Example: RV10105MV. Accessories ordered separately.

RV1010			V
Model No.	CCT	Optics	Finish
RV1010	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - Blue	S - 11° M - 30° L - 47° W - 10°x40°	V - Aluminum

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - Installation



**WC6050**  
Outer Casing - **REQUIRED**




**WN6005**  
Alignment kit for  
outer casing


## PHOTOMETRIC DATA

Note all Photometry is 3000K


### S - 11°

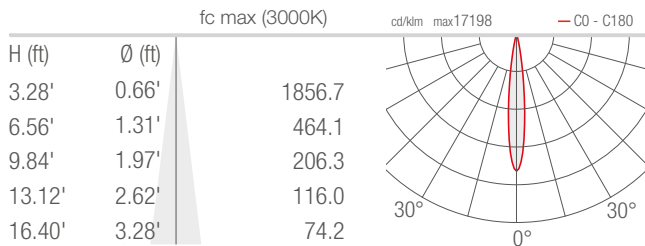


### M - 30°

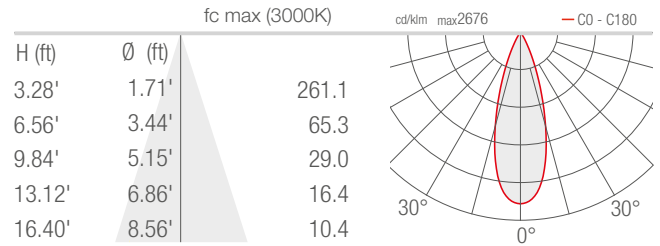

### L - 47°

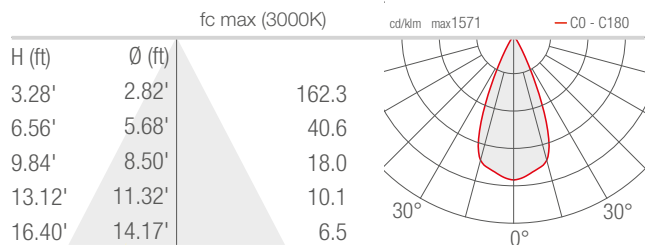

### W - 10°x40°

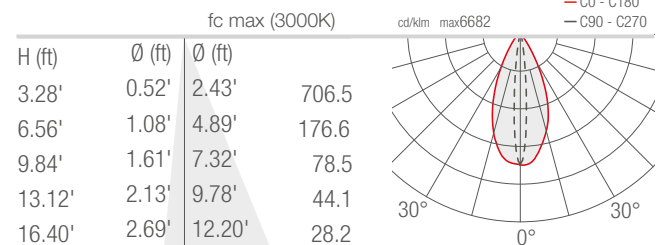

Job Name/Date:

Fixture Type Designation: