








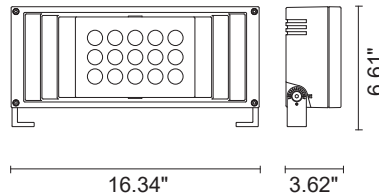

105003P

SCAPE

Slim rectangular floodlight for outdoor installation on a facade/wall. Phosphochromatized and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 15 CREE XP-G3 LED. IP65 rating.



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	 10°	2,160	98.18
high-power led	 30°	2,052	93.28
high-power led	 45°	1,950	88.64
4000°K neutral-white			
high-power led	 10°	2,250	102.27
high-power led	 30°	2,138	97.18
high-power led	 45°	2,031	92.32

Finish color options:


-  Textured Gray RAL 9006
-  Anthracite Gray RAL 7016
-  Matte Black (on request)

Technical features



Technical data

Wattage	22W
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 15 x 15W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double M20 cable gland.
Power cable	3.28' neoprene power cable included
Gross weight	8.4 lbs

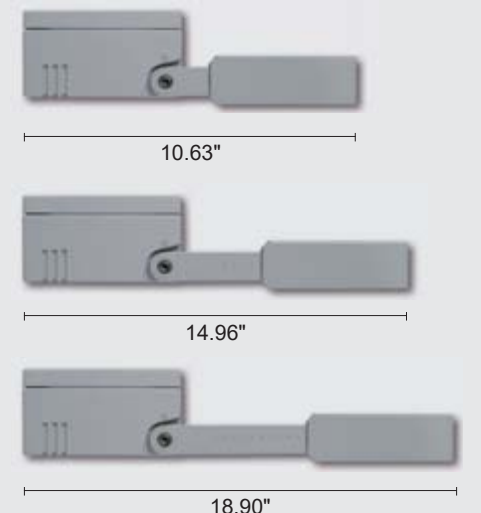

AC003: Wall extensible bracket
Die-cast aluminum
(option to be ordered separately)



WATER DRAINAGE

