

Technical features

IP65	IK08
------	------

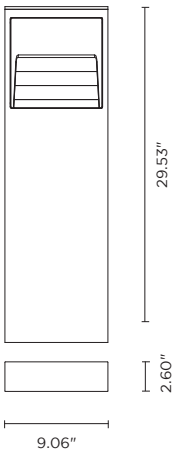
Technical data



Wattage	8 WATT
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance extruded copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 14 x CREE XH-G LED
Screws	Stainless steel
Transformer	Electrical power supply Remote driver required, not included
Gasket	Silicone rubber
Diffuser	Tempered glass
Gross weight	15.43 lbs

601902P

SCOUT MEDIUM

29.5" height bollard, rectangular section, for outdoor surface installation, floor washer 180° light distribution, phospho-chromatized and polyester powder coated extruded copper-free aluminum body, frosted glass diffuser, molded silicone gasket and stainless steel screws. Remote driver required, not included. 14 mid-power CREE XH-G LED. IP65 rating.



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
mid-power led	 180°	650	81.25
<b>4000°K neutral-white</b>			
mid-power led	 180°	665	83.13

Finish color options:

 Textured Grey RAL 9006	 Anthracite Grey RAL 7016	 Matte Black (on request)
---	---	---

