


Simply 1.0 is a recessed uplight for indoor use in floors, ceilings or walls. It is walkover rated with white or blue color options and diffuse optics.



Cutout Dimensions for ceiling/wall installations with fixing spring = Ø 1.10"

Fixture Dimensions



## TECHNICAL DATA

<b>Wattage / Input</b>	1W (220mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body/Trim: Anodized Aluminum Alloy Lens: Opal Polycarbonate
<b>CCT</b>	2700K, 3000K, 4000K, 5000K, Blue
<b>CRI</b>	>80
<b>Delivered Lumens</b>	37 lm (3000K)
<b>Efficacy</b>	37 lm/W (3000K)
<b>Optics</b>	Diffuse
<b>Finishes</b>	Chrome, Pearl Chrome
<b>Fixture Dimensions</b>	Ø1.38" x 0.39" h
<b>Cut-out Size</b>	Ø1.10" (for ceiling or wall installations)
<b>Fixture Weight</b>	0.20 lbs
<b>LED Source</b>	1 Power LED
<b>Lumen Maintenance</b>	L95, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP44
<b>IK Rating</b>	-

## ORDERING INFORMATION

Example: SM10115DC. Power Supplies ordered separately.

SM1011			
Model No.	CCT	Optics	Finish
SM1011	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - Blue	D - Diffuse	C - Chrome P - Pearl Chrome

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

220mA


Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 220mA, 10W, Class 2	1-10
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 220mA, 20W, Class 2	1-18
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 220mA, 30W, Class 2	1-18
<a href="#">PPLT00168-P</a>	0-10V Dimming to 1.0%	120-277VAC to 220mA, 50W, Class 2	1-36
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 220mA, 100W, Class 2	1-76

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note all Photometry is 3000K

### D - Diffuse

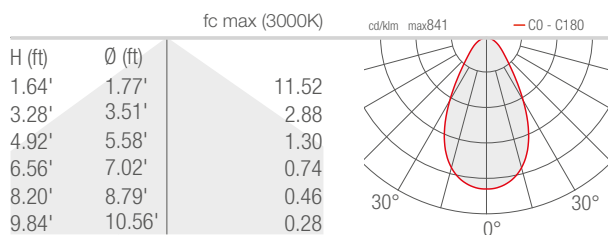

Job Name/Date:

Fixture Type Designation: