


Slice C is an indoor ceiling mounted luminaire with a minimal design made of a white painted aluminum body and AirCoral® front panel that maintains all the features of its totally disappearing recessed version, Slice. It is available in 3 color temperatures and diffused optics.



TECHNICAL DATA

| | |
|---------------------------|-----------------------------------|
| Wattage / Input | 8.5W (350mA) |
| Power Supply | Remote, not included. See page 2. |
| Construction | Body: AirCoral® |
| CCT | 3000K (2700K, 4000K on request) |
| CRI | >90 |
| Delivered Lumens | Available Soon |
| Efficacy | Available Soon |
| Optics | Diffuse |
| Finishes | AirCoral® |
| LED Source | COB professional LED |
| Fixture Dimensions | 5.91" l x 5.91" w x 2.36" h |
| Aperature | 2.36" x 2.36" |
| Fixture Weight | — |
| IP Rating | IP40 |

Fixture Dimensions

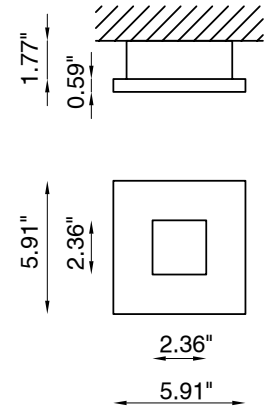

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

- Additionally, Aircoral® is:
- Antibacterial.
 - Antifungal.
 - Scratch-resistant.
 - Dust-resistant.
 - Suitable for painting.
 - LEED recognized material.

ORDERING INFORMATION

Example: BU1922.AC4S00M30.ND.US.

| | | |
|-----------------------|--|--------------|
| BU1922.AC4S00M | | ND.US |
| Model No. | CCT | |
| BU1922.AC4S00M | 27 - 2700K 30 - 3000K 40 - 4000K | ND.US |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

| Part Number | Description | Input/Output | # of Fixtures |
|-----------------------------|--|------------------------------------|---------------|
| PPLT00466-P | 0-10V Dimming to 1.0% | 120-277VAC to 350mA, 10W, Class 2 | 1-1 |
| PPLT00496 | Phase Dim (120V only) | 120VAC to 350mA, 12W, Class 2 | 1-1 |
| PPLT00308-P | 0-10V Dimming to 0.1% | 120-277VAC to 350mA, 30W, Class 2 | 1-2 |
| PPLT00263 | Leading / Trailing-Edge Dimming to 10% (120V only) | 120-277VAC to 350mA, 32W, Class 2 | 1-1 |
| PPLT00467-P | 0-10V Dimming to 1.0% | 120-277VAC to 350mA, 50W, Class 2 | 1-2 |
| PPLT00538-P | 0-10V Dimming to 0.1% | 120-277VAC to 350mA, 100W, Class 2 | 1-8 |

Lutron Compatible

| Part Number | Option | Lutron SKU | Dim Range | Description | Input/Output | # of Fixtures |
|---------------------------|----------------|------------|-----------|---|-----------------------------------|---------------|
| PPLT00271 | LTEA2W | LTEA | 100%-1% | Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only) | 120VAC to 350mA, 13W, Class 2 | 1-1 |
| PPLT00516 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 13W, Class 2 | 1-1 |
| PPLT00179 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 19W, Class 2 | 2-2 |
| PPLT00220 | LTEA2W | LTEA | 100%-1% | Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only) | 120VAC to 350mA, 19W, Class 2 | 2-2 |

For other power supply options consult factory.

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: