


At 0.49" thick and high lumen output, Slice is a revolutionary indoor recessed luminaire characterized by its slim design. With no need for a mounting box, Slice can be both ceiling and wall mounted, fitted into the thickness of the drywall panel or plaster. It is available in 3000K with diffuse optics.

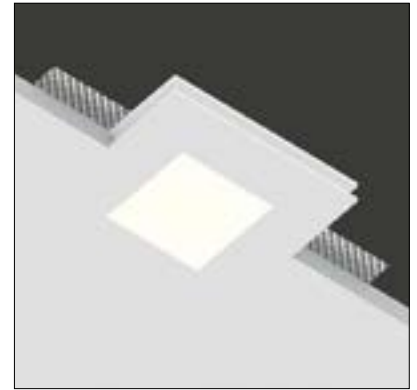


## TECHNICAL DATA

<b>Wattage / Input</b>	8.5W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: AirCoral®
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	1020 lm (3000K)
<b>Efficacy</b>	120 lm/W (3000K)
<b>Optics</b>	Diffuse
<b>Finishes</b>	Unfinished
<b>Cut-Out Dimensions</b>	5.12" x 5.12"
<b>Fixture Dimensions</b>	4.72" l x 4.72" w x 0.49" h
<b>Aperture</b>	2.36" x 2.36"
<b>Fixture Weight</b>	0.18 lbs
<b>LED Source</b>	1 COB Professional LED
<b>IP Rating</b>	IP40

Ceiling Cut-Out: 5.12" x 5.12"

Fixture Dimensions: 4.72" l x 4.72" w x 0.49" h

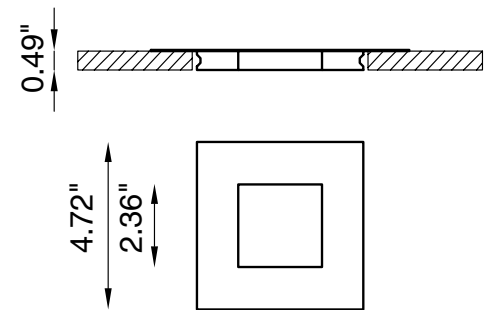

## ORDERING INFORMATION

*Example: BU1921.AC4R00M30WD.US Power Supplies ordered separately.*

<b>BU1921.AC4R00M</b>	<b>30</b>	<b>WD.US</b>
<b>Model No.</b>	<b>CCT</b>	
<b>BU1921.AC4R00M</b>	<b>30 - 3000K</b>	<b>WD.US</b>
	<b>27 - 2700K</b>	
	<b>40 - 4000K</b>	

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	Fixtures
<a href="#">PPLT00468</a>	Phase Dim (120V Only)	120VAC to 350mA, 14W, Class 2	1-1
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA 20W, Class 2	1-2
<a href="#">PPLT00263</a>	Trailing-Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-2
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-8


## Lutron Compatible Drivers

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	Fixtures
<a href="#">PPLT00271</a>	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC, 13W	1-1
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 13W	1-1
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 19W	2-2
<a href="#">PPLT00220</a>	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC, 19W	2-2

For other power supply options consult factory.

## PHOTOMETRIC DATA

Maximum Candela = 217

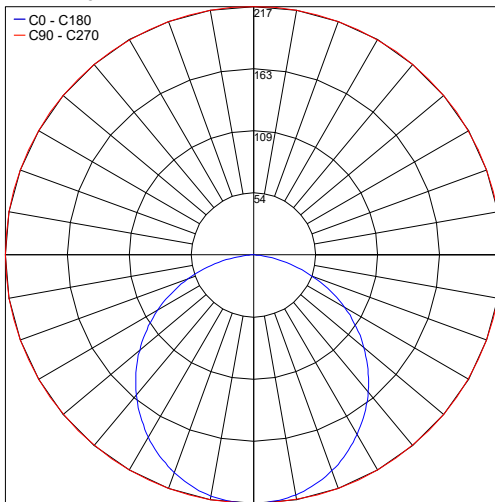

Job Name/Date:

Fixture Type Designation: