

The Slim range is the longer, slimmer variant of the 'original' Normall. The Slim combines timeless design with state of the art, energy efficient LED units. The pure and simple lines result in a sleek, elegant and minimalistic design. The curved back is optimized to create a great indirect lighting solution. Our suggestion is to use Slim by the pair, as an uplight or downlight. The range is fully paintable, which ensures Slim will blend perfectly with your interior. And if you decide to redecorate the place in a number of years, the wall fixture will just adapt to your new desires.



designplan™ 

WALL



SLIM

BRICK  THE WALL®

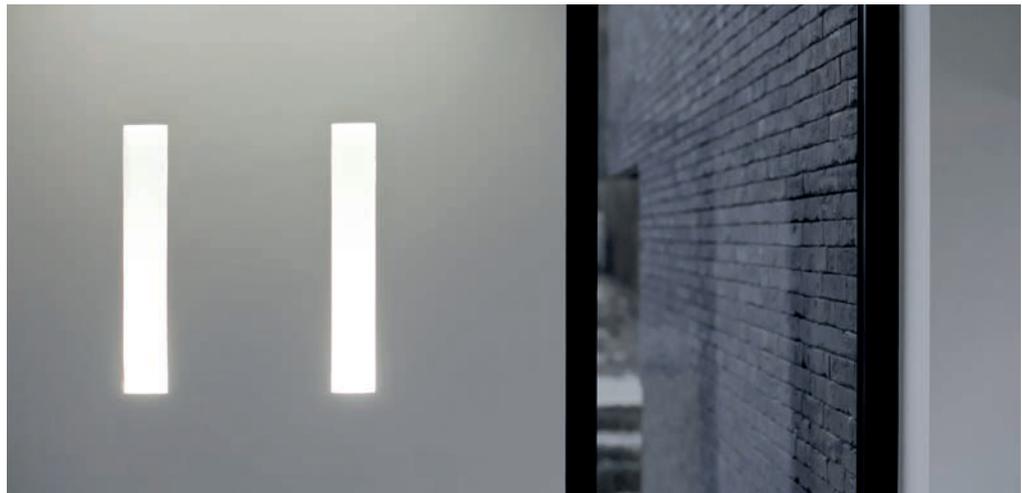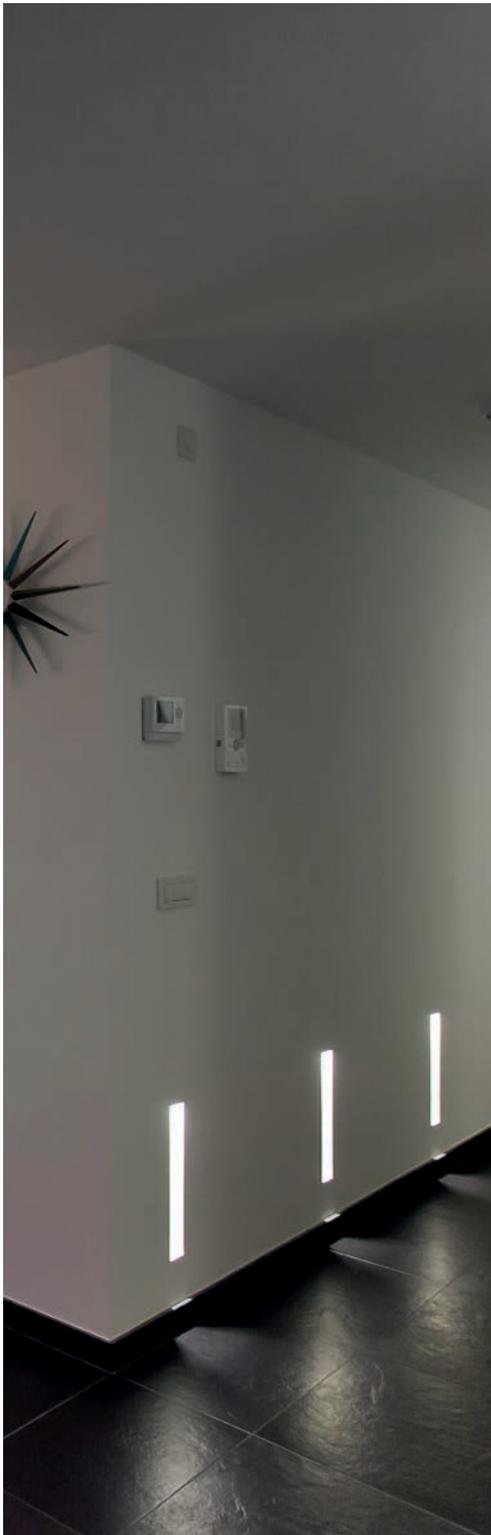

SLIM IP20

INDOOR

Fix (not adjustable) 0° - 0°

□ 3.74"×21.65"

Material : CALCYT® plaster

SLIM LED WARMDIM 500LM REMOTE DRIVER

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 107 29 600 remote driver

350mA/50Hz - 6W - requires remote LED driver

□ - serial wiring □ 0.2m  - (P) -

4 Step MacAdam - CRI 80 -

SLIM LED 1000LM REMOTE DRIVER

REF N°	2700°K	3000°K	4000°K
excl. driver	107 27 000	107 27 100	107 27 200

350mA/50Hz - 9.1W - requires remote LED driver

□ - serial wiring □ 0.2m  - (P) -

2 Step MacAdam - CRI 80


SLIM LED 600LM REMOTE DRIVER

REF N°	2200°K	2700°K	3000°K
excl. driver	107 29 500	107 29 000	107 29 100

250mA/50Hz - 6.4W - requires remote LED driver

□ - serial wiring □ 0.2m  - (P) -

2 Step MacAdam - CRI 90 -

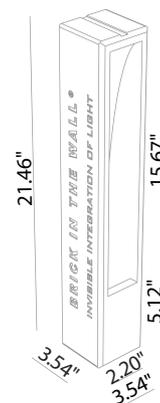


Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT SLIM

REF N° 707 01 000 For mounting into gypsum walls

Housing: perforated aluminium

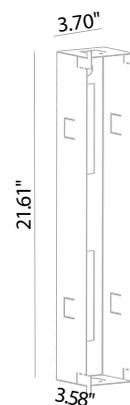

SLIM



SLIM





SLIM



