

STEP INSIDE 2.8
3000K, 2W, cor-ten



designplanTM 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



STEP INSIDE

INDOOR STEP LIGHTS
ORIENTATION LIGHT

SEMI-RECESSED



2700K 3000K 4000K 5000K blue



diffuse

CONSTANT CURRENT
2W 500mA

CONSTANT VOLTAGE
2W 24VDC

SQUARE COVER



STEP INSIDE 2.2



STEP INSIDE 2.8

ROUND COVER



STEP INSIDE 2.3





STEP INSIDE 2.9





STEP INSIDE



STEP INSIDE 2.2



STEP INSIDE 2.3





POWER / POWER SUPPLY MODEL NO.	2W 500mA SP2212 D E White SP2212 D C Chrome SP2212 D S Satin SP2212 D N Black SP2212 D T Cor-ten SP2212 D 4 Light ivory
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	145 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	35 lm (3000K, 500mA)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body and cover in aluminum lens in transparent extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 4.92' PVC cable FROR 2x0.01"/0.01" Ø0.14"
WIRING	series
MOUNTING	semi-recessed (wall)
NOTES	outdoor version: Step Outside 2.0

POWER / POWER SUPPLY MODEL NO.	2W 500mA SP2312 D E White SP2312 D C Chrome SP2312 D S Satin SP2312 D N Black SP2312 D T Cor-ten SP2312 D 4 Light ivory
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	145 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	35 lm (3000K, 500mA)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body and cover in aluminum lens in transparent extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 4.92' PVC cable FROR 2x0.01"/0.01" Ø0.14"
WIRING	series
MOUNTING	semi-recessed (wall)
NOTES	outdoor version: Step Outside 2.1



STEP INSIDE 2.8

**2W 24VDC**

SP2800 D E White
SP2800 D C Chrome
SP2800 D S Satin
SP2800 D N Black
SP2800 D T Cor-ten
SP2800 D 4 Light ivory

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED
 1/4 ANSI BIN (white LED color)
 50,000h L90 B10 (Ta 25°C)

body and cover in aluminum
 lens in transparent extra-clear glass

remote power supply required, not included

includes 4.92' PVC cable
 FROR 2x0.01"/0.01" Ø0.14"



parallel

semi-recessed (wall)

outdoor version: Step Outside 2.6



STEP INSIDE 2.9

**2W 24VDC**

SP2900 D E White
SP2900 D C Chrome
SP2900 D S Satin
SP2900 D N Black
SP2900 D T Cor-ten
SP2900 D 4 Light ivory

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED
 1/4 ANSI BIN (white LED color)
 50,000h L90 B10 (Ta 25°C)

body and cover in aluminum
 lens in transparent extra-clear glass

remote power supply required, not included

includes 4.92' PVC cable
 FROR 2x0.01"/0.01" Ø0.14"

parallel

semi-recessed (wall)

outdoor version: Step Outside 2.7

STEP INSIDE

ACCESSORIES AND POWER SUPPLY UNITS

ACCESSORIES FOR INSTALLATION



WC0201

Outer casing for solid walls



WC0202

Outer casing for solid walls

STANDARD FINISHES



White



Chrome



Satin



Black



Cor-ten



Light ivory







POSITIONING DIAGRAMMS

STEP INSIDE 2.2 / 2.3 / 2.8 / 2.9

D - Diffuse

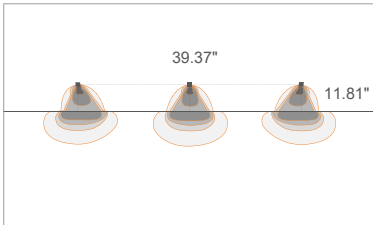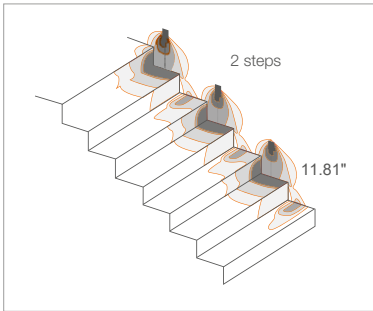

✓
STEP INSIDE 2.3
3000K, 2W, white





STEP INSIDE

INDOOR STEP LIGHTS

STEP INSIDE 2.2

2.3

2.8

2.9

D - Diffuse

Isofc (3000K)

