


**Technical features**

IP65 IK08

502020P


# STEP LINEAR 07

Recessed linear steplight for outdoor installation in the wall, phosphochromatized and polyester powder coated die-cast copper-free aluminum body and frame, tempered frosted glass diffuser, polypropylene housing for recess, molded silicone gasket and stainless steel screws. Built-in LED driver 120VAC 50-60Hz, with 30 low-power SMD5630 LED. IP65 rating.

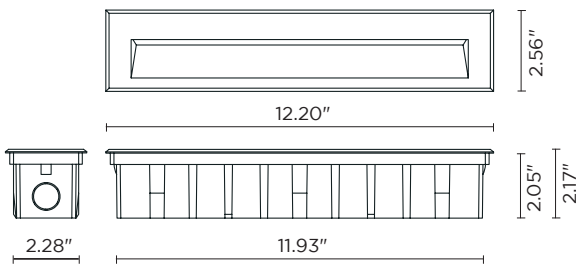

**Technical data**

Wattage	10.5W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body and frame.
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 30 x SMD5630 LED
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50/60Hz built-in
Cable	1.64' neoprene power cable included
Gasket	Silicone rubber
Glass	Tempered
Gross weight	3.31 lbs

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
low power led	 Asymmetric 120°	360	34.28

**Finish color options:**

 Textured Grey RAL 9006

