

STEP OUTSIDE 6.2
3000K, 2W, satin

Light planning by / ZKLD Light Design Studio
Project by / Hakan Kiran Architecture
Nurol Life, Istanbul, Turkey

designplan™ 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

STEP OUTSIDE



OUTDOOR STEP LIGHTS
ORIENTATION LIGHT AND LIGHTING FOR WALKWAYS AND STEPS

	SQUARE COVER	ROUND COVER
<p>SEMI-RECESSED</p> <p>2700K 3000K 4000K 5000K blue</p> <p>diffuse</p>	<p>STEP OUTSIDE 2.0 2W 500mA constant current</p> <p>STEP OUTSIDE 2.6 2W 24VDC constant voltage</p>	<p>STEP OUTSIDE 2.1 2W 500mA constant current</p> <p>STEP OUTSIDE 2.7 2W 24VDC constant voltage</p>
<p>RECESSED CONSTANT CURRENT</p> <p>2700K 3000K 4000K 5000K blue</p> <p>asymmetrical</p>	<p>STEP OUTSIDE 6.1 2W 500mA</p> <p>STEP OUTSIDE 6.2 2W 500mA</p> <p>STEP OUTSIDE 6.3 2W 500mA</p>	<p>STEP OUTSIDE 5.1 2W 500mA</p> <p>STEP OUTSIDE 5.2 2W 500mA</p>
<p>SURFACE MOUNTED CONSTANT VOLTAGE</p> <p>3000K 4000K 5000K</p> <p>diffuse</p>	<p>STEP OUTSIDE 7.0 3.5W 24VDC</p> <p>STEP OUTSIDE 8.0 3.5W 24VDC</p>	



STEP OUTSIDE 2



STEP OUTSIDE 2.0

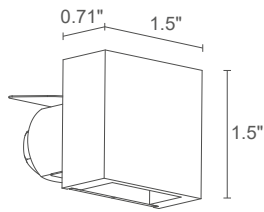

STEP OUTSIDE 2.1


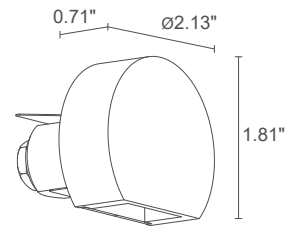


POWER / POWER SUPPLY MODEL NO.	2W 500mA SP2012 D A E - White SP2012 D A N - Black SP2012 D A T - Cor-ten
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
POWER CABLES	includes 4.92' neoprene cable H05RN-F 2x0.01"/0.03" Ø0.25" 1 - 3.28' 2 - 32.81' 3 - 49.21' 4 - 65.62'
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	145 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	35 lm (3000K, 500mA)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body and cover in aluminum lens in transparent extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
WIRING	series
MOUNTING	semi-recessed (wall)
ACCESSORIES	see accessories page
NOTES	indoor version: Step Inside 2.2

POWER / POWER SUPPLY MODEL NO.	2W 500mA SP2112 D A E - White SP2112 D A N - Black SP2112 D A T - Cor-ten
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
POWER CABLES	includes 4.92' neoprene cable H05RN-F 2x0.01"/0.03" Ø0.25" 1 - 3.28' 2 - 32.81' 3 - 49.21' 4 - 65.62'
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	145 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	35 lm (3000K, 500mA)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body and cover in aluminum lens in transparent extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
WIRING	series
MOUNTING	semi-recessed (wall)
ACCESSORIES	see accessories page
NOTES	indoor version: Step Inside 2.3



STEP OUTSIDE 2.6

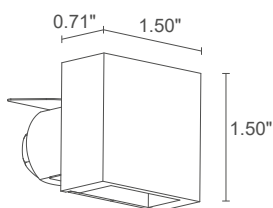

- 2W 24VDC**
SP2600 ■ **D E** - ■ White
SP2600 ■ **D N** - ■ Black
SP2600 ■ **D T** - ■ Cor-ten

■	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
■	includes 4.92' neoprene cable H05RN-F 2x0.01"/0.03" Ø0.25" 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED
1/4 ANSI BIN (white LED color)
50,000h L90 B10 (Ta 25°C)

body and cover in aluminum
lens in transparent extra-clear glass

remote power supply required, not included

parallel



semi-recessed (wall)

see accessories page

indoor version: Step Inside 2.8



STEP OUTSIDE 2.7

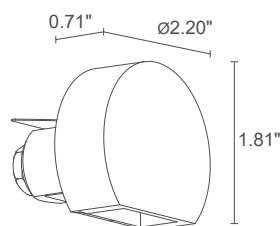

- 2W 24VDC**
SP2700 ■ **D E** - ■ White
SP2700 ■ **D N** - ■ Black
SP2700 ■ **D T** - ■ Cor-ten

■	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
■	includes 4.92' neoprene cable H05RN-F 2x0.01"/0.03" Ø0.25" 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED
1/4 ANSI BIN (white LED color)
50,000h L90 B10 (Ta 25°C)

body and cover in aluminum
lens in transparent extra-clear glass

remote power supply required, not included

parallel

semi-recessed (wall)

see accessories page

indoor version: Step Inside 2.9



STEP OUTSIDE 5.2


3000K, 2W, customized version
with anthracite finish

Project by / arch. Fernanda Cantone Light
planning by / Light Style
Castello Tafuri Charming Suites Portopalo
di Capo Passero, Syracuse, Italy



STEP OUTSIDE 5



STEP OUTSIDE 5.1

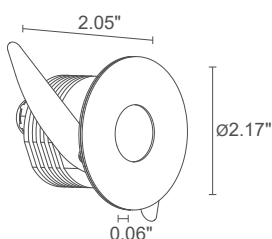

STEP OUTSIDE 5.2

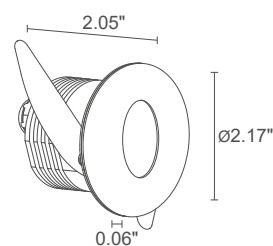


POWER / POWER SUPPLY	2W 500mA
MODEL NO.	SP5112 ■ A A E - ■ White SP5112 ■ A A S - ■ Satin SP5112 ■ A A N - ■ Black SP5112 ■ A A T - ■ Cor-ten
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
POWER CABLES	includes 4.92' neoprene cable H05RN-F 2x0.01"/0.03" Ø0.25" 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'
OPTICS	asymmetrical
LUMEN OUTPUT AT SOURCE	145 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	34 lm (3000K, 500mA)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in aluminum, cover in stainless steel lens in transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
WIRING	series
MOUNTING	recessed (wall)
ACCESSORIES	see accessories page

POWER / POWER SUPPLY	2W 500mA
MODEL NO.	SP5212 ■ A A E - ■ White SP5212 ■ A A S - ■ Satin SP5212 ■ A A N - ■ Black SP5212 ■ A A T - ■ Cor-ten
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
POWER CABLES	includes 4.92' neoprene cable H05RN-F 2x0.01"/0.03" Ø0.25" 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'
OPTICS	asymmetrical
LUMEN OUTPUT AT SOURCE	145 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	42 lm (3000K, 500mA)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in aluminum, cover in stainless steel lens in transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
WIRING	series
MOUNTING	recessed (wall)
ACCESSORIES	see accessories page

STEP OUTSIDE 6



STEP OUTSIDE 6.1

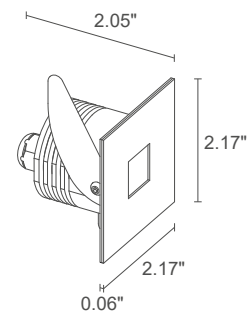

Ø 2.76"
H 3.54"

Ø 1.77"

LED
0.53 lbs IP65
IPS

✓
STEP OUTSIDE 6.3
3000K, 2W, satin
SPOT 1.0
3000K, 2W, 20°
Private residence, Positano, Salerno, Italy



POWER / POWER SUPPLY" 2W 500mA
MODEL NO. SP6112 A A E - White
SP6112 A A S - Satin
SP6112 A A N - Black
SP6112 A A T - Cor-ten

LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
POWER CABLES	includes 4.92' neoprene cable H05RN-F 2x0.01"0.03" Ø0.25" 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'

OPTICS asymmetrical

LUMEN OUTPUT AT SOURCE 145 lm (3000K, 500mA)

DELIVERED LUMEN OUTPUT 29 lm (3000K, 500mA)

NO. AND TYPE OF LED 1 power LED
1/4 ANSI BIN (white LED color)
50,000h L90 B10 (Ta 25°C)

MATERIAL body in aluminum, cover in stainless steel
lens in transparent plexiglass

POWER SUPPLY UNIT remote power supply required, not included


WIRING series

MOUNTING recessed (wall)

ACCESSORIES see accessories page



STEP OUTSIDE 6.2

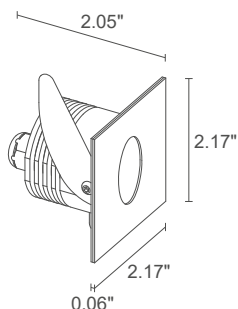

Ø 2.76"
H 3.54"

Ø 1.77"



0.53 lbs IP65



2W 500mA

- SP6212 A A E - White
- SP6212 A A S - Satin
- SP6212 A A N - Black
- SP6212 A A T - Cor-ten

- F - 2700K
- 5 - 3000K
- 9 - 4000K
- 0 - 5000K
- 1 - blue

- includes 4.92' neoprene cable H05RN-F 2x0.01"/0.03" Ø0.25"
- 1 - 16.40'
- 2 - 32.81'
- 3 - 49.21'
- 4 - 65.62'

asymmetrical

145 lm (3000K, 500mA)

42 lm (3000K, 500mA)

1 power LED
1/4 ANSI BIN (white LED color)
50,000h L90 B10 (Ta 25°C)

body in aluminum, cover in stainless steel
lens in transparent plexiglass

remote power supply required, not included


series

recessed (wall)

see accessories page



STEP OUTSIDE 6.3

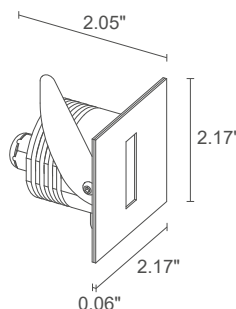

Ø 2.76"
H 3.54"

Ø 1.77"



0.53 lbs IP65



2W 500mA

- SP6312 A A E - White
- SP6312 A A S - Satin
- SP6312 A A N - Black
- SP6312 A A T - Cor-ten

- F - 2700K
- 5 - 3000K
- 9 - 4000K
- 0 - 5000K
- 1 - blue

- includes 4.92' neoprene cable H05RN-F 2x0.01"/0.03" Ø0.25"
- 1 - 16.40'
- 2 - 32.81'
- 3 - 49.21'
- 4 - 65.62'

asymmetrical

145 lm (3000K, 500mA)

25 lm (3000K, 500mA)

1 power LED
1/4 ANSI BIN (white LED color)
50,000h L90 B10 (Ta 25°C)


body in aluminum, cover in stainless steel
lens in transparent plexiglass

remote power supply required, not included

series

recessed (wall)



see accessories page

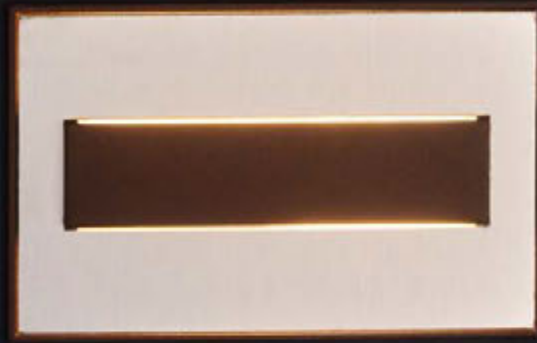

STEP OUTSIDE 7 / 8



STEP OUTSIDE 7.0

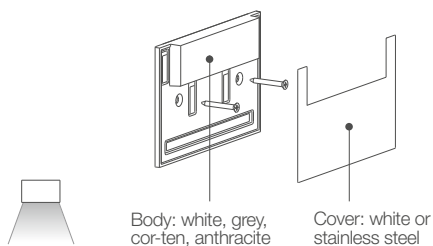
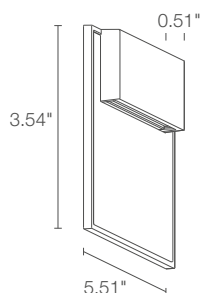


Body: white, grey, cor-ten, anthracite
Cover: white or stainless steel

LED TECH 0.44 lbs IP65



STEP OUTSIDE 8.0

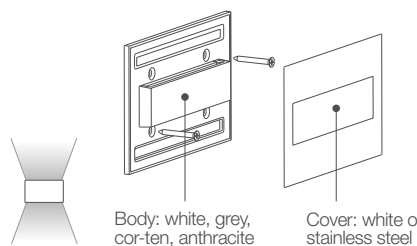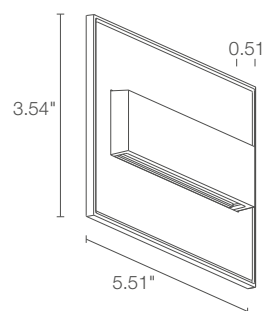

Body: white, grey, cor-ten, anthracite
Cover: white or stainless steel

LED TECH 0.49 lbs IP65



POWER / POWER SUPPLY	3.5W 24VDC
MODEL NO.	SP7000 A W White-White SP7000 A E White-Stainless steel SP7000 A F Grey-Stainless steel SP7000 A H Anthracite-Stainless steel SP7000 A T Cor-ten-Stainless steel
LED COLOR	5 - 3000K 9 - 4000K 0 - 5000K
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	107 lm (3000K)
DELIVERED LUMEN OUTPUT	20 lm (3000K)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in transparent polycarbonate
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 2x0.98' single-core cables
MOUNTING	surface mounted (wall)
ACCESSORIES	see accessories page

POWER / POWER SUPPLY	3.5W 24VDC
MODEL NO.	SP8000 A W White-White SP8000 A E White-Stainless steel SP8000 A F Grey-Stainless steel SP8000 A H Anthracite-Stainless steel SP8000 A T Cor-ten-Stainless steel
LED COLOR	5 - 3000K 9 - 4000K 0 - 5000K
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	107 lm (3000K) per beam
DELIVERED LUMEN OUTPUT	8 lm (3000K) per beam
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in transparent polycarbonate
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 2x0.98' single-core cables
MOUNTING	surface mounted (wall)
ACCESSORIES	see accessories page

< STEP OUTSIDE 8.0
3000K, 3.5W, cor-ten + stainless steel

STEP OUTSIDE

ACCESSORIES

ACCESSORIES FOR INSTALLATION



WC0202

Outer casing for solid walls
(Step Outside 2.0 /
2.1 / 2.6 / 2.7)



WC1501

Outer casing for solid walls
(Step Outside 5.1 / 5.2 /
6.1 / 6.2 / 6.3)



WC0301

Optional outer casing
(Step Outside 7.0 / 8.0)

POWER CABLES Step Outside 2.0 / 2.1 / 2.6 / 2.7 / 5.1 / 5.2 / 6.1 / 6.2 / 6.3

the choice of power cable is included in the configuration
of the code for the lighting fixture

- 1 length 16.40'
- 2 length 32.81'
- 3 length 49.21'
- 4 length 65.62'

Neoprene cables
H05RN-F 2x0.35/0.75 Ø6.3 mm IPS

STEP OUTSIDE 5.2

3000K, 2W, customized version with anthracite finish

Project by / arch. Fernanda Cantone Light
planning by / Light Style
Castello Tafuri Charming Suites Portopalo
di Capo Passero, Syracuse, Italy




STEP OUTSIDE

PHOTOMETRIC DATA


STEP OUTSIDE 2.0 2.1 2.6 2.7

D - Diffuse

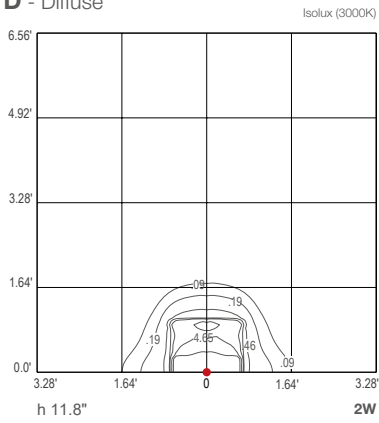








STEP OUTSIDE 5.1

A - Asymmetrical

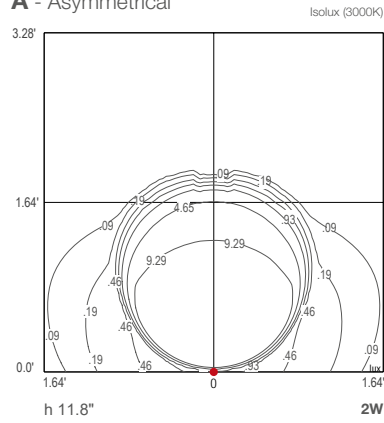

STEP OUTSIDE 5.2




A - Asymmetrical

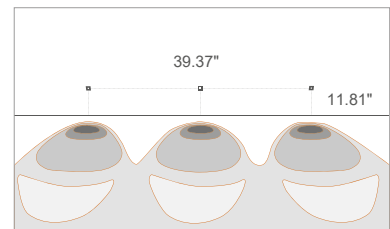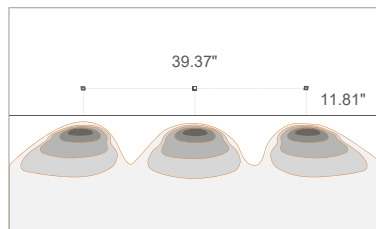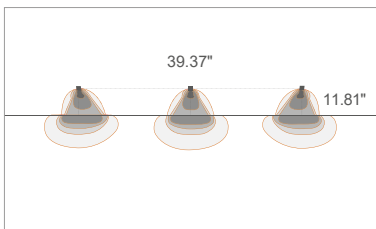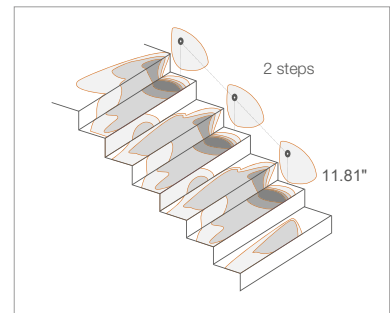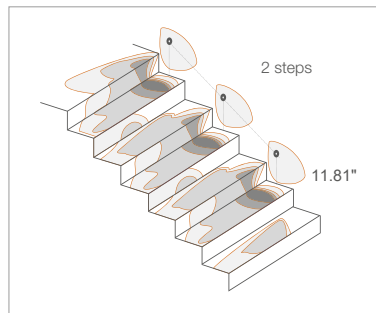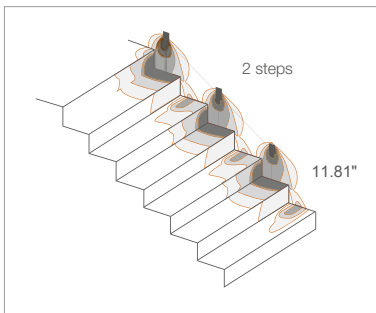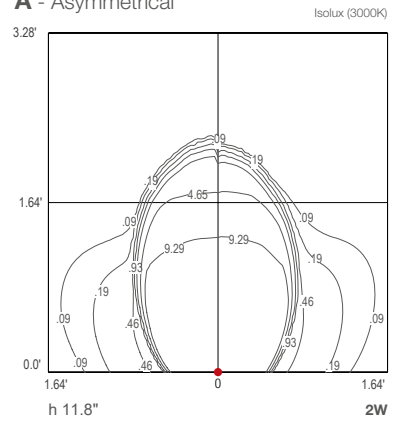

STEP OUTSIDE

PHOTOMETRIC DATA

STEP OUTSIDE 7.0

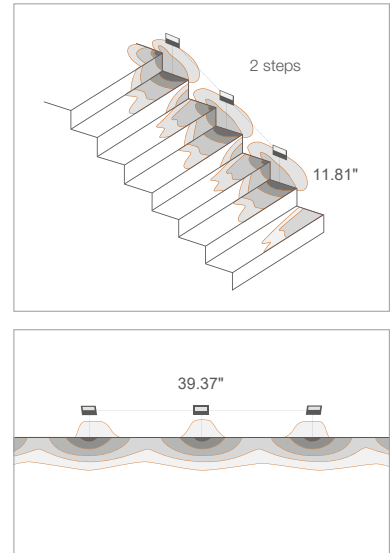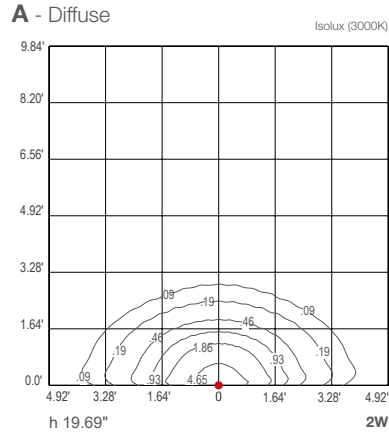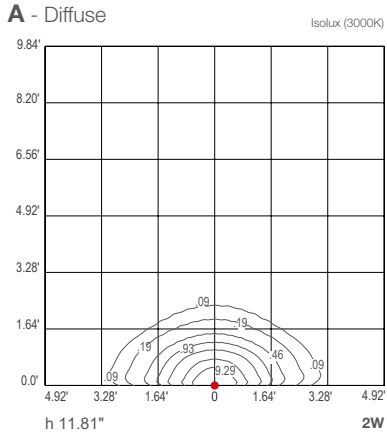

STEP OUTSIDE 8.0

