

STRA P

OUTDOOR PROJECTORS, ARCHITECTURAL LIGHTING FOR LARGE BUILDINGS



STRA P 1.0
37W, anthracite

79 Trenton Avenue
Frenchtown, NJ 08825


www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042


designplan™ 



STRA P 1.0

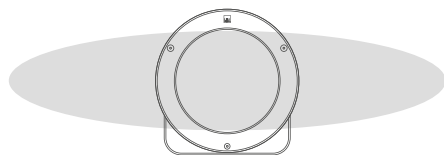


10°x45° optics



Adjustable
66°x11° optics



patented
elliptical optics,
adjusted manually
with magnet

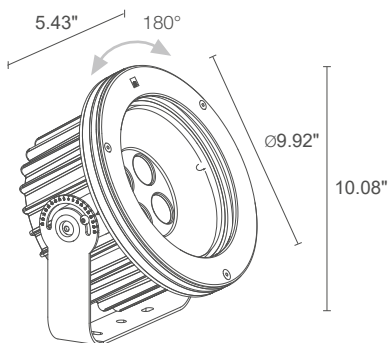


13.23 lbs

POWER / POWER SUPPLY	37W 120VAC
MODEL NO.	PS1010 H Anthracite
	37W 120VAC 0-10V
	PS1010 H R Anthracite
CRI	0 - CRI 80 1 - CRI >90
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	V - 11° S - 14° M - 30° L - 37° W - 10°x45° X - 66°x11° adjustable
LUMEN OUTPUT AT SOURCE	3402 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	2024 lm (3000K, 30°, CRI 80) 2205 lm (3000K, 66°x11°, CRI 80)
NO. AND TYPE OF LED	4 high intensity power LEDs 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum trim in AISI 316L stainless steel lens in serigraphed, tempered, transparent extra-clear glass
POWER SUPPLY UNIT	built in
POWER CABLES	includes 4.92' neoprene cable H05RN-F 0.12"x0.04" Ø0.28"
MOUNTING	surface mounted (ceiling, wall, ground)
ACCESSORIES	see accessories page
FEATURES	66°x11° optics adjustable through 360° using magnet included
NOTES	Stra available in various ingrade versions







STRA P 5.0



32°x61° optics




61°x32° optics



Adjustable
66°x11° optics



patented
elliptical optics,
adjusted manually
with magnet

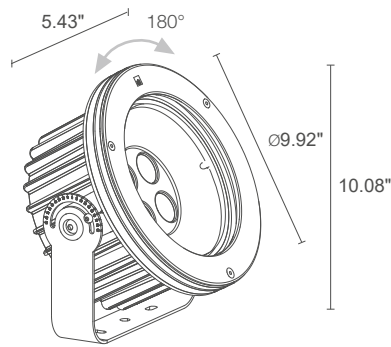




 13.23 lbs IP66 IK10

POWER / POWER SUPPLY	39W 24Vdc
MODEL NO.	PS5000 7 ■ H Anthracite
OPTICS	S - 24° M - 33° L - 60° W - 32°x61° Z - 61°x32° X - 66°x11° adjustable
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	2048 lm, R: 352 lm G: 640 lm B: 208 lm W: 848 lm (4000K)
DELIVERED LUMEN OUTPUT	1216 lm, R: 209 lm G: 380 lm B: 123 lm W: 504 lm (4000K, 33°)
NO. AND TYPE OF LED	4 RGBW LED groups 50,000h L85 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum trim in AISI 316L stainless steel lens in serigraphed, tempered, transparent extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 4.92' FEP+RUB cable (equivalent to H05RN-F) 0.24"x0.02"/0.02" Ø0.25"
MOUNTING	surface mounted (ceiling, wall, ground)
FEATURES	66°x11° optics adjustable through 360° using magnet included
NOTES	Stra available in various ingrade versions



STRA P

ACCESSORIES

ANTI-GLARE ACCESSORIES



WH0610

Honeycomb louvre
built into the lighting fixture

order together with
the lighting fixture

the honeycomb louvre can be fitted on all
optics except for the 66°x11° optics

OPTICAL ACCESSORIES



WE0201

Magnet for adjustable optics

ACCESSORIES FOR INSTALLATION



WN7100

Anti-fall kit

▼
STRA P 1.0
2700K, 37W, 30°

Light planning and product distribution / Mise en Scène Éclairage

Project and installation / VinJay-Studio

Photo by / Lisa Ricciotti

La Villa Madie, Cassis, France






STRA P


OUTDOOR PROJECTORS

STRA P 1.0


V - 11° CRI 80

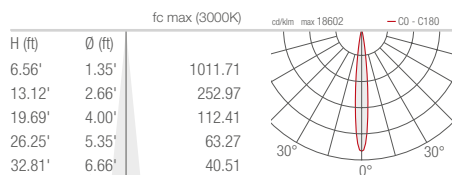


S - 14° CRI 80

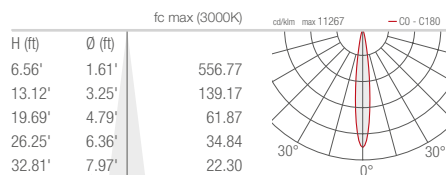


M - 30° CRI 80

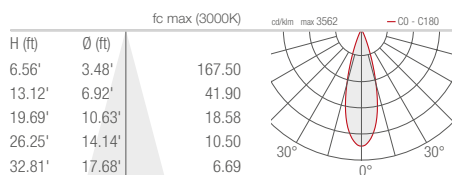


L - 37° CRI 80

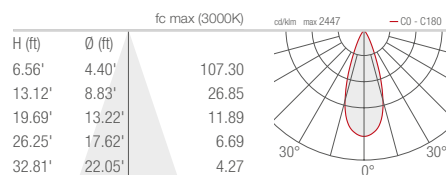

W - 10°x45° CRI 80

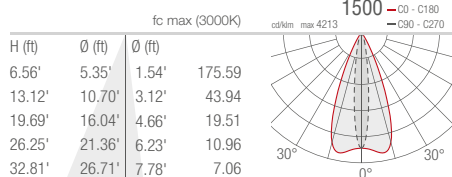


X - 66°x11° tiltable CRI 80

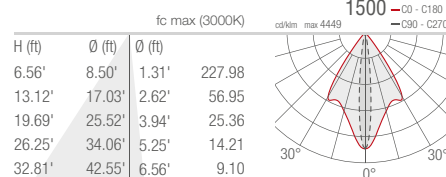


STRA P 5.0


S - 24°

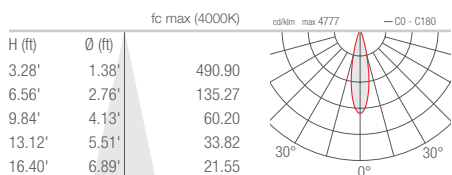


M - 33°

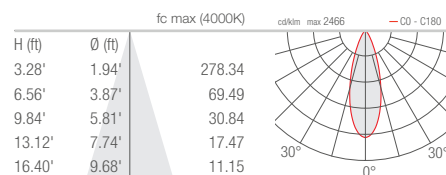


L - 60°

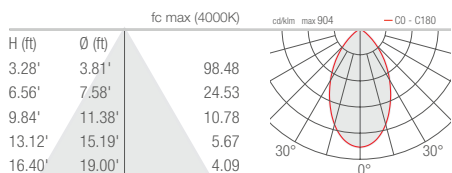

W - 32°x61°

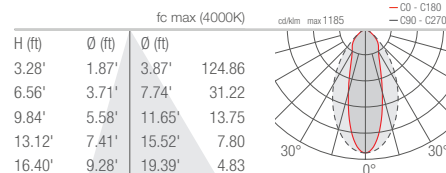

Z - 61°x32°

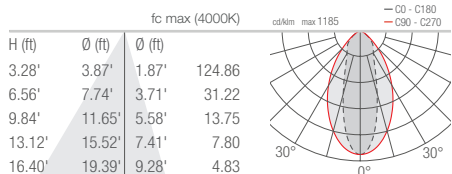

X - 66°x11° adjustable

