

Stripp XF is a recessed long and narrow fixture made of CALCYT® plaster that can be used as an up- or downlight and is equipped with state of the art LED technology. It is available in 5 color temperatures and can be directly installed in solid walls as well as in gypsum walls by means of an optional plasterkit.



Ceiling Cut-Out: 3.27" x 21.65"  
Fixture Dimensions


## TECHNICAL DATA

<b>Wattage / Input</b>	1W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: CALCYT® Plaster
<b>CCT</b>	2200K, 2700K, 3000K, 4000K, Royal Blue
<b>CRI</b>	>90, >80
<b>Optics</b>	Fixed
<b>Finishes</b>	CALCYT® Plaster - fully paintable
<b>Fixture Dimensions</b>	3.07" w x 21.46" h x 2.36" l
<b>Cut-out Dimension</b>	3.27" x 21.65"
<b>Aperature</b>	0.67" w x 16.26" h
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP20, IP54

## ORDERING INFORMATION

*Example: 141 60 100. Accessories / Power Supplies ordered separately.*

Model No.	Description
141 60 500 - 2200K	1W, 100 lm, CRI 80, IP20 Indoor
141 60 000 - 2700K	1W, 100 lm, CRI 90, IP20 Indoor
141 60 100 - 3000K	1W, 100 lm, CRI 90, IP20 Indoor
141 60 200 - 4000K	1W, 100 lm, CRI 90, IP20 Indoor
141 60 300 - royal blue	1W, 100 lm, CRI 90, IP20 Indoor
141 60 501 - 2200K	1W, 100 lm, CRI 80, IP54 Bathroom
141 60 001 - 2700K	1W, 100 lm, CRI 90, IP54 Bathroom
141 60 101 - 3000K	1W, 100 lm, CRI 90, IP54 Bathroom
141 60 201 - 4000K	1W, 100 lm, CRI 90, IP54 Bathroom
141 60 301 - royal blue	1W, 100 lm, CRI 90, IP54 Bathroom
141 60 505 - 2200K	1W, 100 lm, CRI 80, IP54 Outdoor
141 60 005 - 2700K	1W, 100 lm, CRI 90, IP54 Outdoor
141 60 105 - 3000K	1W, 100 lm, CRI 90, IP54 Outdoor
141 60 205 - 4000K	1W, 100 lm, CRI 90, IP54 Outdoor
141 60 305 - royal blue	1W, 100 lm, CRI 90, IP54 Outdoor

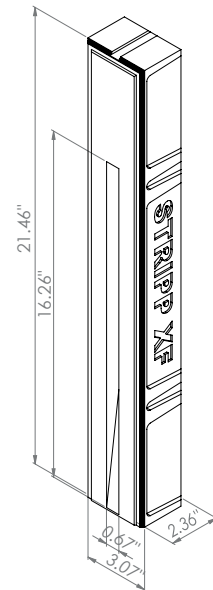

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00138</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-3
<a href="#">PPLT00496</a>	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	3-9
<a href="#">PPLT00480-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2	1-16
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-16
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-68

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00252</a>	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 350mA, 7W, Class 2	4-5
<a href="#">PPLT00247</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	4-5
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	6-11
<a href="#">PPLT00271</a>	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 350mA, 13W, Class 2	6-11
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	12-16
<a href="#">PPLT00220</a>	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 350mA, 19W, Class 2	12-16

For other power supply options consult factory.

## ACCESSORIES - Installation

**743 01 000**

Outer Casing

Housing: perforated aluminum

Job Name/Date:

Fixture Type Designation: