

Technical features

IP 65	IK 09
-------	-------


Technical data

Wattage	8W
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 5 x 1.5W CREE “XP-G3” LED up and NR. 5 x 1.5W CREE “XP-G3” LED down.
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Rubber grommet	M20 Rutaseal® in EPDM
Glass	Tempered
Gross weight	6.6 lbs

401014P

TECH MEDIUM 01 SQUARE

Square wall mounted luminaire for outdoor installation on a facade/wall, with light distribution downward only. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120VAC 50-60Hz, with 5 CREE XP-G3 LED. IP65 rating.

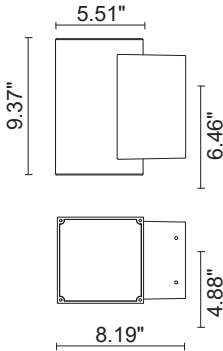

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	720	90.00
high-power led	30°	684	85.50
high-power led	45°	650	81.25
4000°K neutral-white			
high-power led	10°	750	93.75
high-power led	30°	713	89.13
high-power led	45°	677	84.63

Finish color options:

Textured Gray RAL 9006	Anthracite Gray RAL 7016	Matte Black (on request)
------------------------	--------------------------	--------------------------

