

THE BOLLARD


The Bollard is a DurCoral®, IP65 rated, opaque black, outdoor bollard with a compact and minimal design. The pole height is customizable and the body can be decorated with any types of paintings in order to merge with all kinds of environments. It is available in 3000K as standard with a wide 70° light beam.



TECHNICAL DATA

Wattage / Input	5W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: DurCoral®
CCT	3000K (2700K - 4000K on request)
BUG RATING	Coming Soon
CRI	>80, >90 on request
Delivered Lumens	Coming Soon
Efficacy	Coming Soon
Optics	70°
Finishes	DurCoral®
Fixture Dimensions	Head: 7.87" h x 3.15" w x 6.10" l Base Height: Customizable
Fixture Weight	13.23 lbs
IP Rating	IP65

Fixture Dimensions

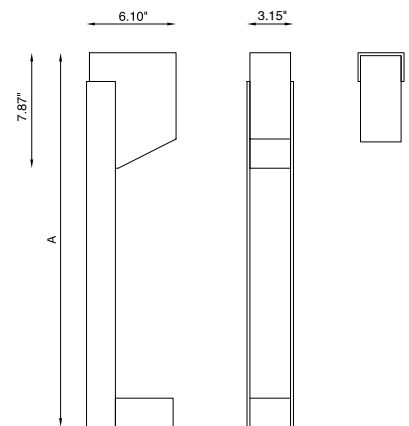

The body is made of DurCoral®, a high-performance “hi-tech” material born from the union of Coral® and cement. It is an aggregate twice as hard as concrete, which allows very high performances in terms of quality, flow and resistance and that, above all, differs from other outdoor materials, for the possibility of being treated with any type of paint and finish. Distinguished by the ability to resist abrasion, insensitive to ultraviolet rays, pollution and atmospheric agents is certainly the ideal material to be placed outdoors.

ORDERING INFORMATION

Example: BU1731.DC.US

BU1731	DC	US
Model No.	Finish	
BU1731	DC - DurCoral®	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00154	0-10V Dimming to 10%	120-277VAC to 500mA, 12W, Class 2	2-2
PPLT00469	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2	2-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-5
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-20

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00249	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 500mA, 10W, Class 2	1-1
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	1-1
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	2-3
PPLT00250	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 500mA, 27W, Class 2	4-5
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	4-5

For other power supply options consult factory.

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: