

TREVI 1.0
3000K, 7W, 40°



designplan™ 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

TREVI

OUTDOOR AND UNDERWATER LINEAR PROFILES
DIFFUSE LIGHT OR WITH OPTICS IN POOLS AND FOUNTAINS



24.13"

TREVI 1.0

white light: 7W 24VDC (optics version)
white light: 10W 24VDC (diffuse version)
RGB light: 11W 24VDC (diffuse version)

47.56"

TREVI 1.1

white light: 14W 24VDC (optics version)
white light: 21W 24VDC (diffuse version)
RGB light: 24W 24VDC (diffuse version)

70.98"

TREVI 1.2


white light: 21W 24VDC (optics version)
white light: 32W 24VDC (diffuse version)
RGB light: 37W 24VDC (diffuse version)



^
TREVI 1.2
 3000K, 32W, diffuse

Project and light planning by / traverso-ighy architetti
 Photo by / Alessandra Chemollo
 Corte Bertesina, Vicenza, Italy

TREVI 1.0

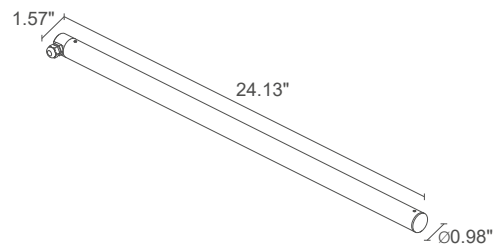





 0.9 lbs
 



POWER / POWER SUPPLY	7W 24VDC white light 24.13" LED spacing 3.94" 10W 24VDC white light 24.13" diffuse
MODEL NO.	TR1000 ■ ■ A 11W 24VDC RGB light 24.13" diffuse TR1000 6 D A
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	M - 40° L - 65° W - 20°x50° D - diffuse
LUMEN OUTPUT AT SOURCE	619 lm (3000K, optics version) 1092 lm (3000K, diffuse version) RGB: 526 lm, R: 118 lm G: 336 lm B: 72 lm (diffuse version)
DELIVERED LUMEN OUTPUT	504 lm (3000K, 40°) 548 lm (3000K, diffuse optics) RGB: 376 lm, R: 84 lm G: 240 lm B: 52 lm (diffuse optics)
NO. AND TYPE OF LED	6 power LEDs, LED spacing 3.94", 1/4 ANSI BIN (optics version) 78 mid-power LEDs, 3-step MacAdam (diffuse version) RGB: 42 low-power, full-color LEDs 50,000h L90 B10 (Ta 25°C)
MATERIAL	lens in transparent polycarbonate (optics version) lens in opal polycarbonate (diffuse version) end caps in AISI 316L stainless steel
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 16.40' neoprene cable H05RN-F 0.08"x0.03" Ø0.25" RGB: includes 16.40' FEP+PCP cable (equivalent to H05RN-F) 0.16"x0.02"/0.02" Ø0.25"
MOUNTING	surface mounted (ceiling, wall, ground)
ACCESSORIES	see accessories page
NOTES	available on request in the following versions: 12.32" and 4W power (optics version) 12.32" and 5W power (diffuse version) 12.32" and 5W power (RGB version)



TREVI 1.1

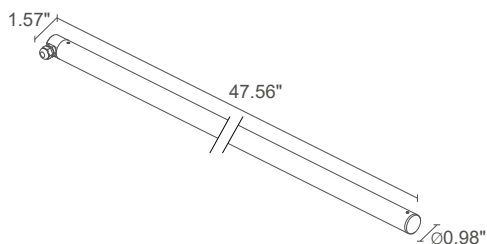

TREVI 1.2

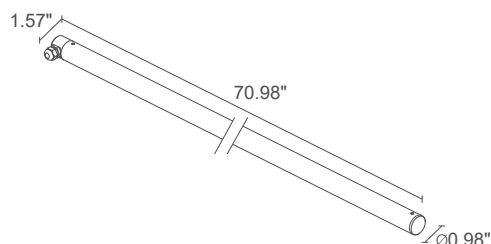

IPS LED TECH 1.8 lbs IP68 IK10

14W 24VDC white light 47.56" LED spacing 3.94"
21W 24VDC white light 47.56" diffuse
TR1100 ■ ■ A

24W 24VDC RGB light 47.56" diffuse
TR1100 6 D A

■	F - 2700K 5 - 3000K 9 - 4000K
■	M - 40° L - 65° W - 20°x50° D - diffuse

1237 lm (3000K, optics version)
2268 lm (3000K, diffuse version)
RGB: 1100 lm, R: 245 lm G: 703 lm
B: 152 lm (diffuse version)

1008 lm (3000K, 40°)
1138 lm (3000K, diffuse optics)
RGB: 786 lm, R: 175 lm G: 502 lm
B: 109 lm (diffuse optics)

12 power LEDs, LED spacing 3.94", 1/4 ANSI BIN (optics version) 162 mid-power LEDs, 3-step MacAdam (diffuse version)
RGB: 90 low-power, full-color LEDs 50,000h L90 B10 (Ta 25°C)

lens in transparent polycarbonate (optics version)
lens in opal polycarbonate (diffuse version)
end caps in AISI 316L stainless steel

remote power supply required, not included

includes 16.40' neoprene cable H05RN-F 0.08"x0.03" Ø0.25"
RGB: includes 16.40' FEP+PCP cable (equivalent to H05RN-F) 0.16"x0.02"/0.02" Ø0.25"

surface mounted (ceiling, wall, ground)

see accessories page

available on request in the following versions:
12.32" and 4W power (optics version)
12.32" and 5W power (diffuse version)
12.32" and 5W power (RGB version)

IPS LED TECH 4.6 lbs IP68 IK10

21W 24VDC white light 70.98" LED spacing 3.94"
32W 24VDC white light 70.98" diffuse
TR1200 ■ ■ A

37W 24VDC RGB light 70.98" diffuse
TR1200 6 D A

■	F - 2700K 5 - 3000K 9 - 4000K
■	M - 40° L - 65° W - 20°x50° D - diffuse

1856 lm (3000K, optics version)
3444 lm (3000K, diffuse version)
RGB: 1676 lm, R: 372 lm G: 1071 lm
B: 233 lm (diffuse version)

1512 lm (3000K, 40°)
1728 lm (3000K, diffuse optics)
RGB: 1197 lm, R: 266 lm G: 765 lm
B: 166 lm (diffuse optics)

18 power LEDs, LED spacing 3.94", 1/4 ANSI BIN (optics version) 246 mid-power LEDs, 3-step MacAdam (diffuse version)
RGB: 138 low-power, full-color LEDs 50,000h L90 B10 (Ta 25°C)

lens in transparent polycarbonate (optics version)
lens in opal polycarbonate (diffuse version)
end caps in AISI 316L stainless steel

remote power supply required, not included

includes 16.40' neoprene cable H05RN-F 0.08"x0.03" Ø0.25"
RGB: includes 16.40' FEP+PCP cable (equivalent to H05RN-F) 0.16"x0.02"/0.02" Ø0.25"

surface mounted (ceiling, wall, ground)


see accessories page

available on request in the following versions:
12.32" and 4W power (optics version)
12.32" and 5W power (diffuse version)
12.32" and 5W power (RGB version)


TREVI

ACCESSORIES

ACCESSORIES FOR INSTALLATION



WM0501
Pair of clips




WM0502
Pair of tamper-resistant clips


OUTDOOR AND UNDERWATER LINEAR PROFILES

TREVI 1.0


M - 40°

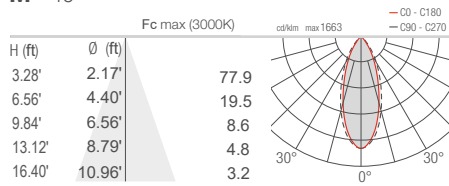

L - 65°

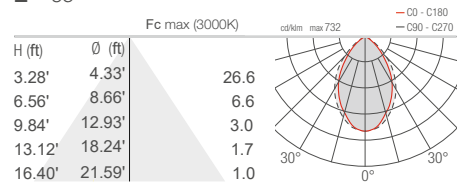

W - 20°x50°

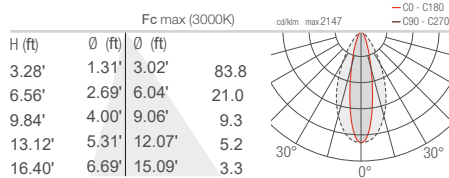

D - Diffuse

