

TURIS MINI 1.1


Turis is a family of recessed downlights perfect for general lighting. Featuring a simple, elegant square or round design, the Turis comes with diffuse optics that can be either flush or deep set.



TECHNICAL DATA

Wattage / Input	4.5W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Black Anodized Aluminum EN AW 6082 Trim: Steel Lens: Plexiglass Frosted on One Side
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	310 lm (3000K)
Efficacy	68.9 lm/W (3000K)
Optics	Diffuse
Finishes	White, Chrome, Custom RAL (see below)
Fixture Dimensions	Ø1.73" x 2.87" h
Cut-out Size	Ø1.57"
Fixture Weight	0.33 lbs
LED Source	1 Multichip Power LED
Lumen Maintenance	L80, B10 >50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	32°F to +113°F
IP Rating	IP40, IP44 Installed
IK Rating	-

Cut-Out Dimensions: 1.46" x 1.46"
Fixture Dimensions



ORDERING INFORMATION

Example: MT1101FDB. Accessories / Power Supplies ordered separately.

MT1101		D	
Model No.	CCT	Optics	Finish
MT1101	F - 2700K 5 - 3000K 9 - 4000K	D - Diffuse	B - White CH - Chrome C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC


Part Number	Description	Input/Output	# of Fixtures
PPLT00128	Non-Dim	120VAC to 24VDC, 6W, Class 2, IP65	1-1
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-2
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-4
PPLT00156	Non-Dim	120VAC to 24VDC, 45W, Class 2	1-8
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-10
PPLT00627	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-17
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	3-17

For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

D - Diffuse

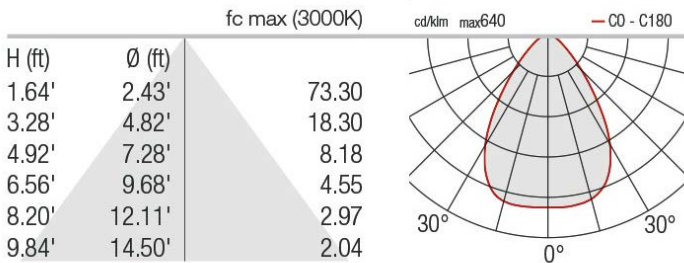

Job Name/Date:

Fixture Type Designation: