


TURIS 1.0  
3000K, 11W, white



designplan<sup>TM</sup> 

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042

# TURIS

INDOOR RECESSED DOWNLIGHTS  
GENERAL LIGHT FOR PRIVATE HOMES



diffuse



2700K 3000K 4000K

4.5W  
24VDC

5.5W/11W  
500mA/350mA

11W/15W  
350mA/500mA

15W/22W  
350mA

22W  
350mA

## ROUND COVER



**TURIS MINI 1.1**  
Ø1.73"



**TURIS 1.1**  
Ø2.44"




**TURIS 3.1**  
Ø3.94"



**TURIS 5.1**  
Ø5.06"



**TURIS 7.1**  
Ø6.38"



**TURIS 1.3**  
Ø2.44"



**TURIS 3.3**  
Ø3.94"

## SQUARE COVER



**TURIS MINI 1.0**  
1.65"x1.65"



**TURIS 1.0**  
2.40"x2.40"




**TURIS 3.0**  
3.82"x3.82"




**TURIS 5.0**  
5.24"x5.24"



**TURIS 7.0**  
6.34"x6.34"



**TURIS 1.2**  
2.40"x2.40"



**TURIS 3.2**  
3.82"x3.82"



**TURIS 2.0**  
2.76"x2.76"



**TURIS 4.0**  
3.70"x3.70"



**TURIS 6.0**  
5.39"x5.39"





**TURIS 8.0**  
6.54"x6.54"

# TURIS MINI






**TURIS MINI 1.0**



<b>POWER // POWER SUPPLY MODEL NO.</b>	4.5W 24VDC <b>MT1001</b> ■ <b>D B</b> White
<b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K RGB on request
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	460 lm (3000K)
<b>DELIVERED LUMEN OUTPUT</b>	295 lm (3000K)
<b>NO. AND TYPE OF LED</b>	1 multichip power LED 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	24VDC: includes 4.92' PVC cable FROR 0.08"x0.01"/0.01" Ø0.14"
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see accessories page
<b>FEATURES</b>	24VDC: dimmable with remote PSU CRI >90



**TURIS MINI 1.1**



<b>POWER // POWER SUPPLY MODEL NO.</b>	4.5W 24VDC <b>MT1101</b> ■ <b>D B</b> White <b>MT1101</b> ■ <b>D CH</b> Chrome
<b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K RGB on request
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	460 lm (3000K)
<b>DELIVERED LUMEN OUTPUT</b>	310 lm (3000K)
<b>NO. AND TYPE OF LED</b>	1 multichip power LED 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	24VDC: includes 4.92' PVC cable FROR 0.08"x0.01"/0.01" Ø0.14"
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see accessories page
<b>FEATURES</b>	24VDC: dimmable with remote PSU CRI >90




TURIS MINI 1.1  
3000K, 5.5W, chrome

Project by // Studio di Architettura Andrea  
Abbadessa, ing. Ignazio Stancanelli, ing. Giuseppe  
Malatino Light planning by // Light Style  
Maniace-Ortigia, Syracuse, Italy

# TURIS 1



**TURIS 1.0**




5.51"x5.51"  
H 5.12" 2.20"x2.20"

LED TECO 0.8 lbs IP40 IP44 installed

<b>POWER SUPPLY</b>	500mA/350mA
<b>MODEL NO.</b>	<b>TU101</b> <span style="color: blue;">■</span> <span style="color: orange;">■</span> <b>DB</b> White <b>TU101</b> <span style="color: blue;">■</span> <span style="color: orange;">■</span> <b>DN</b> Black <b>TU101</b> <span style="color: blue;">■</span> <span style="color: orange;">■</span> <b>DG</b> Gray
<b>POWER</b>	1 - 5.5W 0 - 11W
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K RGB on request
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
<b>DELIVERED LUMEN OUTPUT</b>	295 lm (3000K, 5.5W) 1003 lm (3000K, 11W)
<b>NO. AND TYPE OF LED</b>	1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' cable
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see accessories page
<b>FEATURES</b>	CRI >90



**TURIS 1.1**

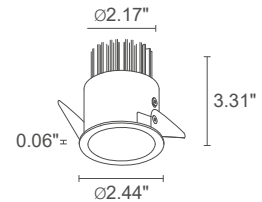


Ø 5.12"  
H 5.12" Ø 2.24"

LED TECO 0.7 lbs IP40 IP44 installed

<b>POWER SUPPLY</b>	500mA/350mA
<b>MODEL NO.</b>	<b>TU110</b> <span style="color: blue;">■</span> <span style="color: orange;">■</span> <b>DB</b> White <b>TU110</b> <span style="color: blue;">■</span> <span style="color: orange;">■</span> <b>DN</b> Black <b>TU110</b> <span style="color: blue;">■</span> <span style="color: orange;">■</span> <b>DG</b> Gray
<b>POWER</b>	1 - 5.5W 0 - 11W
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K RGB on request
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
<b>DELIVERED LUMEN OUTPUT</b>	310 lm (3000K, 5.5W) 944 lm (3000K, 11W)
<b>NO. AND TYPE OF LED</b>	1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' cable
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see accessories page
<b>FEATURES</b>	CRI >90



**TURIS 1.2**

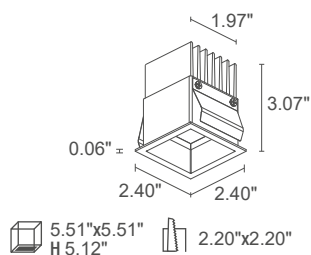

LED TECH 0.8 lbs IP40 IP44 installed


500mA/350mA

**TU121** ■ ■ **DB** White  
**TU121** ■ ■ **DN** Black  
**TU121** ■ ■ **DG** Gray

■	1 - 5.5W 0 - 11W
■	F - 2700K 5 - 3000K 9 - 4000K RGB on request
	diffuse
	644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
	303 lm (3000K, 5.5W) 631 lm (3000K, 11W)
	1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
	remote power supply required, not included
	includes 0.98' cable
	recessed (ceiling)
	see accessories page
	CRI >90



**TURIS 1.3**

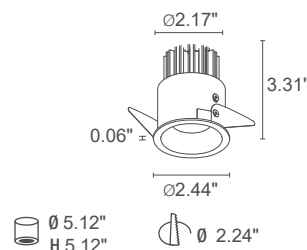

LED TECH 0.8 lbs IP40 IP44 installed

500mA/350mA

**TU131** ■ ■ **DB** White  
**TU131** ■ ■ **DN** Black  
**TU131** ■ ■ **DG** Gray

■	1 - 5.5W 0 - 11W
■	F - 2700K 5 - 3000K 9 - 4000K RGB on request
	diffuse
	644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
	302 lm (3000K, 5.5W) 629 lm (3000K, 11W)
	1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
	remote power supply required, not included
	includes 0.98' cable
	recessed (ceiling)
	see accessories page
	CRI >90

TURIS 1.0  
3000K, 11W, white


Light planning by / Imat Felco Como  
Executed by / Punto Luce di Simonetti Wimmer  
Photo by / Alessio Tamborini  
Private residence, Como, Italy




# TURIS 2



## TURIS 2.0

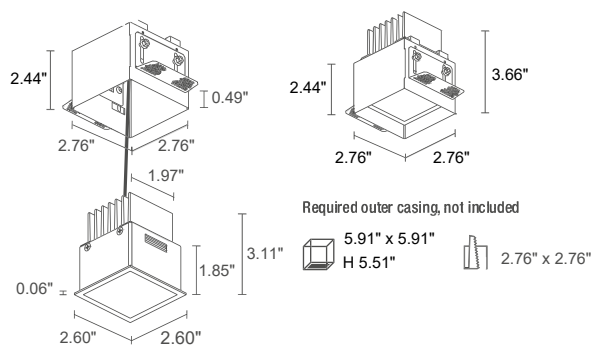

Required outer casing, not included  
 0.7 lbs **IP40 IP44**  
installed


<b>POWER SUPPLY</b>	500mA/350mA
<b>MODEL NO.</b>	TU201 <span style="color: blue;">■</span> <span style="color: orange;">■</span> <b>D B</b>
<b>POWER</b>	1 - 5.5W 0 - 11W
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K RGB on request
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
<b>DELIVERED LUMEN OUTPUT</b>	295 lm (3000K, 5.5W) 1003 lm (3000K, 11W)
<b>NO. AND TYPE OF LED</b>	1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98 cable
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see accessories page
<b>FEATURES</b>	CRI >90



# TURIS 3



**TURIS 3.0**

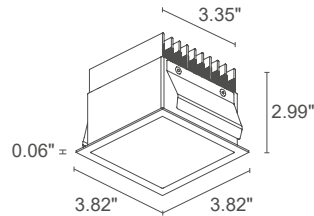


6.69"x6.69"  
H 5.12"      3.54"x3.54"

1.6 lbs **IP40 IP44**  
installed



**TURIS 3.1**

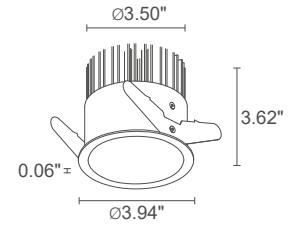

∅ 7.48"  
H 6.30"      ∅ 3.54"



1.5 lbs **IP40 IP44**  
installed

<b>POWER SUPPLY MODEL NO.</b>	350mA <b>TU301</b> <b>D B</b> White <b>TU301</b> <b>D N</b> Black <b>TU301</b> <b>D G</b> Gray
<b>POWER</b>	<b>1</b> - 11W <b>0</b> - 15W
<b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	1251 lm (3000K, 11W) 1870 lm (3000K, 15W)
<b>DELIVERED LUMEN OUTPUT</b>	975 lm (3000K, 11W) 1463 lm (3000K, 15W)
<b>NO. AND TYPE OF LED</b>	4 power LEDs (11W version) 6 power LEDs (15W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' cable
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see accessories page
<b>FEATURES</b>	CRI >90

	350mA <b>TU310</b> <b>D B</b> White <b>TU310</b> <b>D N</b> Black <b>TU310</b> <b>D G</b> Gray
<b>POWER</b>	<b>1</b> - 11W <b>0</b> - 15W
<b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	1251 lm (3000K, 11W) 1870 lm (3000K, 15W)
<b>DELIVERED LUMEN OUTPUT</b>	954 lm (3000K, 11W) 1431 lm (3000K, 15W)
<b>NO. AND TYPE OF LED</b>	4 power LEDs (11W version) 6 power LEDs (15W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' cable
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see accessories page
<b>FEATURES</b>	CRI >90



**TURIS 3.2**


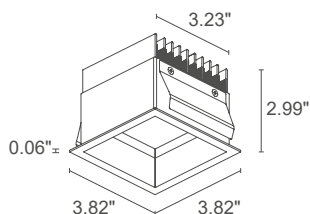


350mA  
**TU321** ■ ■ **D B** White  
**TU321** ■ ■ **D N** Black  
**TU321** ■ ■ **D G** Gray

■	<b>1</b> - 11W <b>0</b> - 15W
■	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
diffuse	
1251 lm (3000K, 11W) 1870 lm (3000K, 15W)	
755 lm (3000K, 11W) 1117 lm (3000K, 15W)	
4 power LEDs (11W version) 6 power LEDs (15W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)	
body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass	
remote power supply required, not included	
includes 0.98' cable	
recessed (ceiling)	
see accessories page	
CRI >90	



**TURIS 3.3**

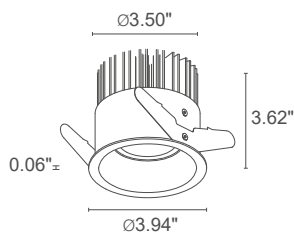


350mA  
**TU331** ■ ■ **D B** White  
**TU331** ■ ■ **D N** Black  
**TU331** ■ ■ **D G** Gray

■	<b>1</b> - 11W <b>0</b> - 15W
■	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
diffuse	
1251 lm (3000K, 11W) 1870 lm (3000K, 15W)	
784 lm (3000K, 11W) 1160 lm (3000K, 15W)	
4 power LEDs (11W version) 6 power LEDs (15W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)	
body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass	
remote power supply required, not included	
includes 0.98' cable	
recessed (ceiling)	
see accessories page	
CRI >90	

# TURIS 4



## TURIS 4.0

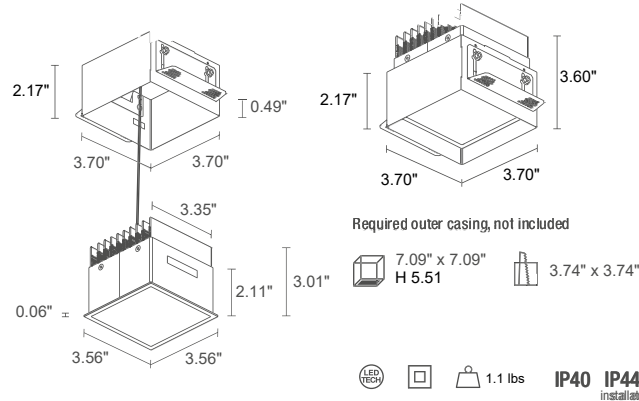


<b>POWER SUPPLY MODEL NO.</b>	350mA/500mA <b>TU401</b> ■ ■ <b>D B</b>
<b>POWER</b>	<b>1</b> - 11W <b>0</b> - 15W
<b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	1251 lm (3000K, 11W) 1870 lm (3000K, 15W)
<b>DELIVERED LUMEN OUTPUT</b>	975 lm (3000K, 11W) 1463 lm (3000K, 15W)
<b>NO. AND TYPE OF LED</b>	4 power LEDs (11W version) 6 power LEDs (15W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' cable
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see accessories page
<b>FEATURES</b>	CRI >90

# TURIS 5



**TURIS 5.0**

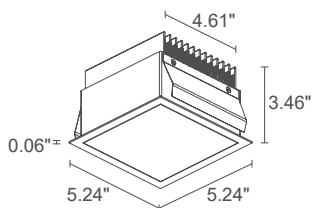


7.87"x7.87"  
H 5.12"      4.92"x4.92"

LED TECH, 2.3 lbs, IP40 IP44 installed



**TURIS 5.1**

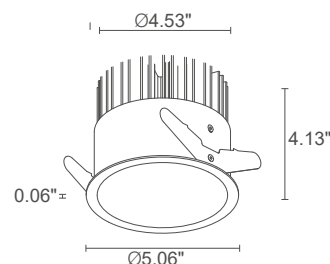

Ø 8.66"  
H 6.30"      Ø 4.61"

LED TECH, 1.5 lbs, IP40 IP44 installed



<b>POWER SUPPLY MODEL NO.</b>	350mA TU501 <span style="color:blue">■</span> <span style="color:orange">■</span> <span style="color:red">■</span> <span style="color:blue">■</span> D B White TU501 <span style="color:blue">■</span> <span style="color:orange">■</span> <span style="color:red">■</span> <span style="color:blue">■</span> D N Black TU501 <span style="color:blue">■</span> <span style="color:orange">■</span> <span style="color:red">■</span> <span style="color:blue">■</span> D G Gray
<b>POWER</b>	1 - 15W 0 - 22W
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	1870 lm (3000K, 15W) 2231 lm (3000K, 22W)
<b>DELIVERED LUMEN OUTPUT</b>	1312 lm (3000K, 15W) 1750 lm (3000K, 22W)
<b>NO. AND TYPE OF LED</b>	6 power LEDs (15W version) 8 power LEDs (22W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' cable
<b>MOUNTING</b>	recessed (ceiling)
<b>FEATURES</b>	CRI >90

<b>POWER SUPPLY MODEL NO.</b>	350mA TU510 <span style="color:blue">■</span> <span style="color:orange">■</span> <span style="color:red">■</span> <span style="color:blue">■</span> D B White TU510 <span style="color:blue">■</span> <span style="color:orange">■</span> <span style="color:red">■</span> <span style="color:blue">■</span> D N Black TU510 <span style="color:blue">■</span> <span style="color:orange">■</span> <span style="color:red">■</span> <span style="color:blue">■</span> D G Gray
<b>POWER</b>	1 - 15W 0 - 22W
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	1870 lm (3000K, 15W) 2231 lm (3000K, 22W)
<b>DELIVERED LUMEN OUTPUT</b>	1312 lm (3000K, 15W) 1750 lm (3000K, 22W)
<b>NO. AND TYPE OF LED</b>	6 power LEDs (15W version) 8 power LEDs (22W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' cable
<b>MOUNTING</b>	recessed (ceiling)
<b>FEATURES</b>	CRI >90

# TURIS 6



## TURIS 6.0

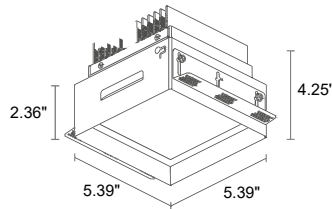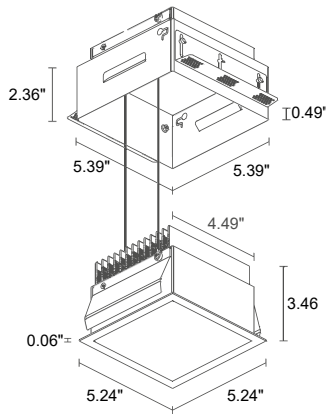

Required outer casing, not included



1.9 lbs

IP40

IP44  
installed

### POWER SUPPLY MODEL NO.

350mA




TU601 ■ ■ **D B** White  
 TU601 ■ ■ **D N** Black  
 TU601 ■ ■ **D G** Grey

<span style="color: blue;">■</span> <b>POWER</b>	<b>1</b> - 15W <b>0</b> - 22W
<span style="color: orange;">■</span> <b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	1870 lm (3000K, 15W) 2231 lm (3000K, 22W)
<b>DELIVERED LUMEN OUTPUT</b>	1312 lm (3000K, 15W) 1750 lm (3000K, 22W)
<b>NO. AND TYPE OF LED</b>	6 power LEDs (15W version) 8 power LEDs (22W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' cable
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see accessories page
<b>FEATURES</b>	CRI >90



# TURIS 7



**TURIS 7.0**

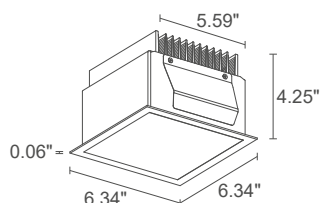

**TURIS 7.1**

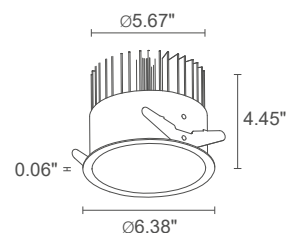

<b>POWER SUPPLY</b>	350mA
<b>MODEL NO.</b>	<b>TU700</b> <span style="color: #00AEEF;">■</span> <span style="color: #FF9933;">■</span> <span style="color: #008000;">■</span> <b>D B</b> White <b>TU700</b> <span style="color: #00AEEF;">■</span> <span style="color: #FF9933;">■</span> <span style="color: #008000;">■</span> <b>D N</b> Black <b>TU700</b> <span style="color: #00AEEF;">■</span> <span style="color: #FF9933;">■</span> <span style="color: #008000;">■</span> <b>D G</b> Gray
<b>POWER</b>	1 - 22W
<b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	2231 lm (3000K, 22W)
<b>DELIVERED LUMEN OUTPUT</b>	1620 lm (3000K, 22W)
<b>NO. AND TYPE OF LED</b>	8 power LEDs (22W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' cable
<b>MOUNTING</b>	recessed (ceiling)
<b>FEATURES</b>	version with CRI >90 available on request

<b>POWER SUPPLY</b>	350mA
<b>MODEL NO.</b>	<b>TU710</b> <span style="color: #00AEEF;">■</span> <span style="color: #FF9933;">■</span> <span style="color: #008000;">■</span> <b>D B</b> White <b>TU710</b> <span style="color: #00AEEF;">■</span> <span style="color: #FF9933;">■</span> <span style="color: #008000;">■</span> <b>D N</b> Black <b>TU710</b> <span style="color: #00AEEF;">■</span> <span style="color: #FF9933;">■</span> <span style="color: #008000;">■</span> <b>D G</b> Gray
<b>POWER</b>	1 - 22W
<b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	2231 lm (3000K, 22W)
<b>DELIVERED LUMEN OUTPUT</b>	1620 lm (3000K, 22W)
<b>NO. AND TYPE OF LED</b>	8 power LEDs (22W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' cable
<b>MOUNTING</b>	recessed (ceiling)
<b>FEATURES</b>	version with CRI >90 available on request



TURIS 7.0


4000K, 30W, white

Project by / ARGE DD-TOL  
AB Raum und Bau GmbH,  
AB Fuchs und Rudolph,  
AGZ Zimmermann, Arch. GmbH  
Contractor / STESAD GmbH  
Photo by / Robert Gommlich Gymnasium  
Tolkewitz, Dresden, Germany


# TURIS 8



## TURIS 8.0

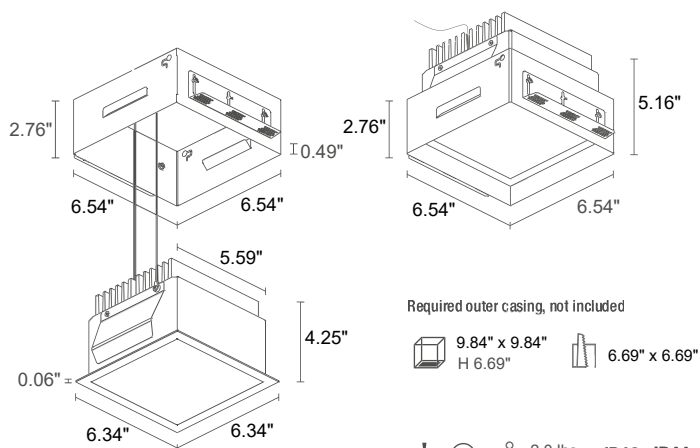

Required outer casing, not included



LED TECH 2.0 lbs IP40 IP44 installed


<b>POWER SUPPLY MODEL NO.</b>	350mA TU800 <span style="color: blue;">■</span> <span style="color: orange;">■</span> <b>D B</b> White TU800 <span style="color: blue;">■</span> <span style="color: orange;">■</span> <b>D N</b> Black TU800 <span style="color: blue;">■</span> <span style="color: orange;">■</span> <b>D G</b> Gray
<b>POWER</b>	1 - 22W
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	diffuse
<b>LUMEN OUTPUT AT SOURCE</b>	2231 lm (3000K, 22W)
<b>DELIVERED LUMEN OUTPUT</b>	1620 lm (3000K, 22W)
<b>NO. AND TYPE OF LED</b>	8 power LEDs (22W version) 3-step MacAdam, 50,000h L80 B10 (Ta 25°C)
<b>MATERIAL</b>	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>POWER CABLES</b>	includes 0.98' cable
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see accessories page
<b>FEATURES</b>	version with CRI >90 available on request




# TURIS

## ACCESSORIES


### ACCESSORIES FOR INSTALLATION



**WC3107**  
Outer casing for solid walls  
(Turis Mini 1.0)




**WC3108**  
Outer casing for solid walls  
(Turis Mini 1.1)



**WC3101**  
Outer casing for solid walls  
(Turis 1.0 / 1.2)




**WC3105**  
Outer casing for solid walls  
(Turis 1.1 / 1.3)

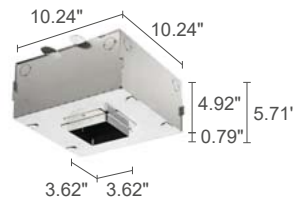


**WC3103**  
Outer casing for solid walls  
(Turis 3.0 / 3.2)



**WC3106**  
Outer casing for solid walls  
(Turis 3.1 / 3.3)




**WC3102**  
Outer casing for plasterboard  
(Turis 2.0)



**WC3104**  
Outer casing for plasterboard  
(Turis 4.0)



**WC3109**  
Outer casing for plasterboard  
(Turis 6.0)

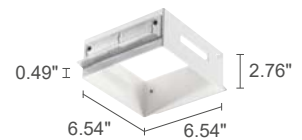

**WC3110**  
Outer casing for plasterboard  
(Turis 8.0)

TURIS 3.0 / TURIS 7.0

4000K, 15W - 30W, white

Project by / ARGE DD-TOL  
AB Raum und Bau GmbH,  
AB Fuchs und Rudolph,  
AGZ Zimmermann, Arch. GmbH  
Contractor / STESAD GmbH  
Photo by / Robert Gommlich Gymnasium  
Tolkewitz, Dresden, Germany






# TURIS

## INDOOR RECESSED


### TURIS MINI 1.0

D - Diffuse

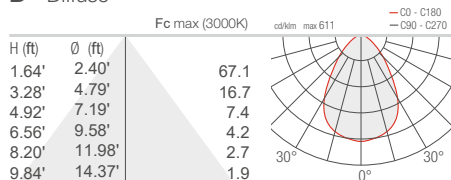


### TURIS MINI 1.1

D - Diffuse

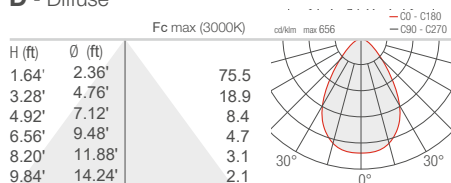


### TURIS 1.0 2.0

D - Diffuse

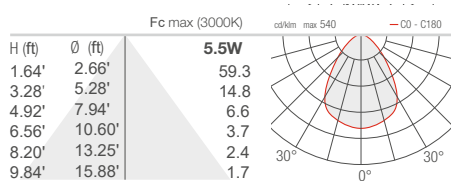


D - Diffuse

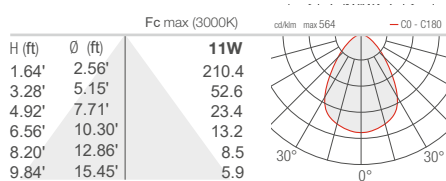


### TURIS 1.1

D - Diffuse

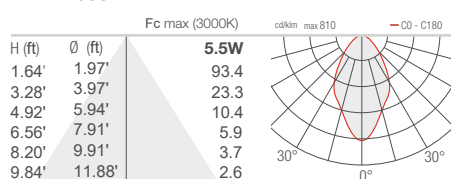


D - Diffuse

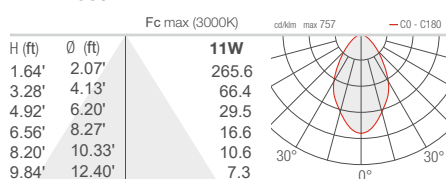


### TURIS 1.2

D - Diffuse

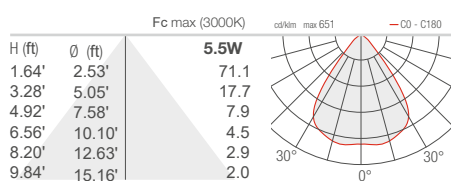


D - Diffuse

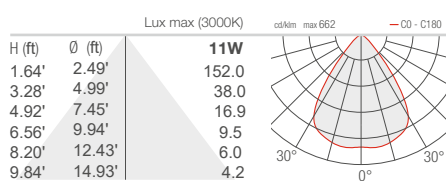


## TURIS 1.3

D - Diffuse

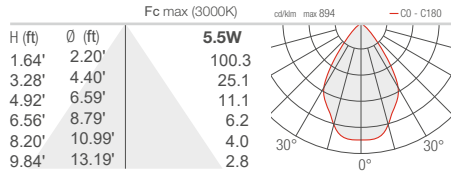


D - Diffuse

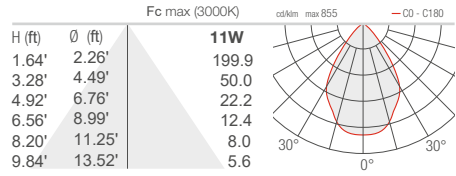


## TURIS 3.0 4.0

D - Diffuse

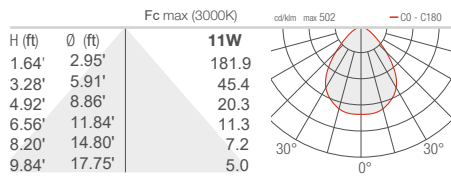


D - Diffuse

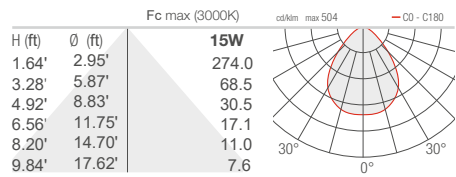


## TURIS 3.1

D - Diffuse

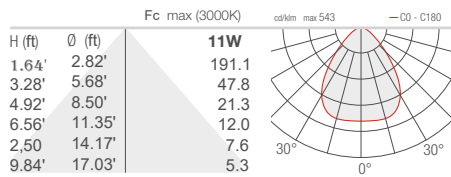


D - Diffuse

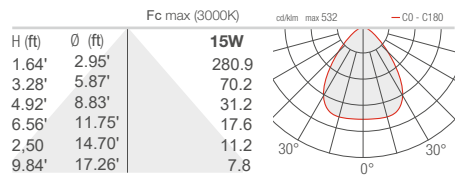


## TURIS 3.2

D - Diffuse

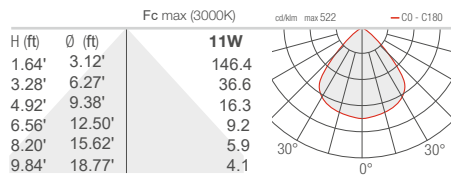


D - Diffuse

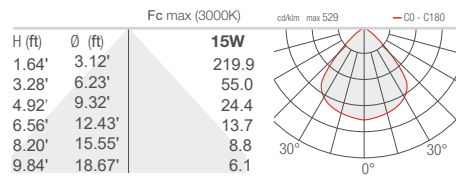


## TURIS 3.3

D - Diffuse

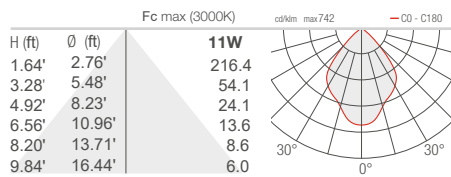


D - Diffuse

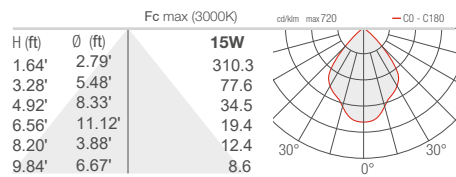




**TURIS 5.0**  
**5.1**  
**6.0**

**D - Diffuse**

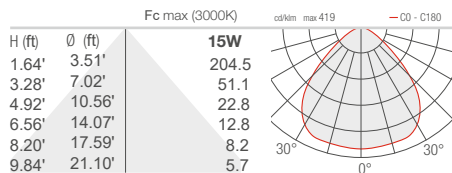


**D - Diffuse**

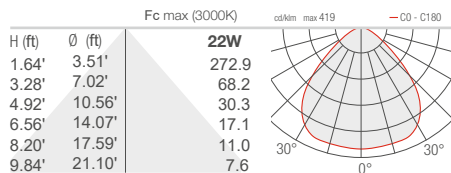

**TURIS 7.0**  
**7.1**  
**8.0**

**D - Diffuse**

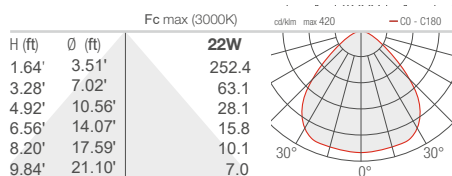

**D - Diffuse**

