



designplan™ 

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042

# UPDOWN

## OUTDOOR WALL MOUNTED



### UPDOWN 3.0

3W/6W  
350/500mA  
single beam



### UPDOWN 3.6

6W 24VDC  
single beam



### UPDOWN 4.0

6W  
350mA  
double beam



### UPDOWN 4.6

6W 24VDC  
double beam



### UPDOWN 6.0

4W  
500mA  
double beam






### UPDOWN 7.0

4W/6W/8W  
500mA  
2, 3, 4 beams

< **UPDOWN 4.0**  
3000K, 6W, 15°, anodized aluminum  
**SMOOTHY 2.0**  
3000K, 6W, 7°, with honeycomb louvre

L&L stand, Light+Building 2014  
Frankfurt am Main, Germany



# UPDOWN 3

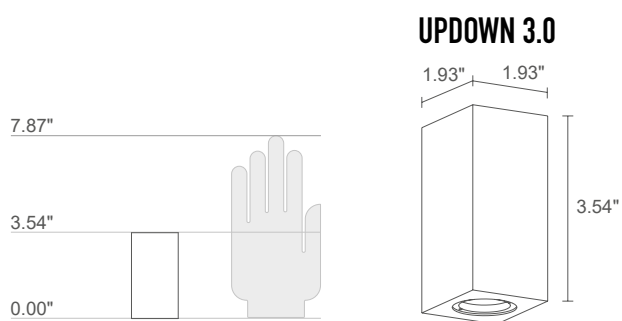

<b>MODEL NO.</b>	<p>6W 500mA blue/white light</p> <p><b>UD3032</b> ■ <b>E</b> White</p> <p><b>UD3032</b> ■ <b>A</b> Anodized aluminum</p> <p><b>UD3032</b> ■ <b>H</b> Anthracite</p> <p><b>UD3032</b> ■ <b>T</b> Cor-ten</p> <p>3W 350mA RGB light</p> <p><b>UD3031 6</b> ■ <b>E</b> White</p> <p><b>UD3031 6</b> ■ <b>A</b> Anodized aluminum</p> <p><b>UD3031 6</b> ■ <b>H</b> Anthracite</p> <p><b>UD3031 6</b> ■ <b>T</b> Cor-ten</p>
■ <b>LED COLOR</b>	<p><b>F</b> - 2700K</p> <p><b>5</b> - 3000K</p> <p><b>9</b> - 4000K</p> <p><b>0</b> - 5000K</p> <p><b>1</b> - blue</p>
■ <b>OPTICS</b>	<p><b>S</b> - 15°</p> <p><b>M</b> - 22°</p> <p><b>L</b> - 54°</p>
<b>LUMEN OUTPUT AT SOURCE</b>	<p>436 lm (3000K, 500mA)</p> <p>RGB: 160 lm: (R) 59 lm, (G) 76 lm, (B) 25 lm (350mA)</p>
<b>DELIVERED LUMEN OUTPUT</b>	<p>239 lm (3000K, 500mA, 22°)</p> <p>RGB: 114 lm: (R) 42 lm, (G) 54 lm, (B) 18 lm (350mA, 22°)</p>
<b>NO. AND TYPE OF LEDs</b>	3 power LEDs
<b>MATERIAL</b>	body in aluminum lens in transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>WIRING</b>	series
<b>MOUNTING</b>	surface mounted (wall)
<b>ACCESSORIES</b>	see accessories page

<b>MODEL NO.</b>	<p>6W 24VDC</p> <p><b>UD3600</b> ■ <b>E</b> White</p> <p><b>UD3600</b> ■ <b>A</b> Anodized aluminum</p> <p><b>UD3600</b> ■ <b>H</b> Anthracite</p> <p><b>UD3600</b> ■ <b>T</b> Cor-ten</p>
■ <b>LED COLOR</b>	<p><b>F</b> - 2700K</p> <p><b>5</b> - 3000K</p> <p><b>9</b> - 4000K</p> <p><b>0</b> - 5000K</p> <p><b>1</b> - blue</p>
■ <b>OPTICS</b>	<p><b>S</b> - 15°</p> <p><b>M</b> - 22°</p> <p><b>L</b> - 54°</p>
<b>LUMEN OUTPUT AT SOURCE</b>	436 lm (3000K)
<b>DELIVERED LUMEN OUTPUT</b>	239 lm (3000K, 22°)
<b>NO. AND TYPE OF LEDs</b>	3 power LEDs
<b>MATERIAL</b>	body in aluminum lens in transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>WIRING</b>	parallel
<b>MOUNTING</b>	surface mounted (wall)
<b>ACCESSORIES</b>	see accessories page

# UPDOWN 4

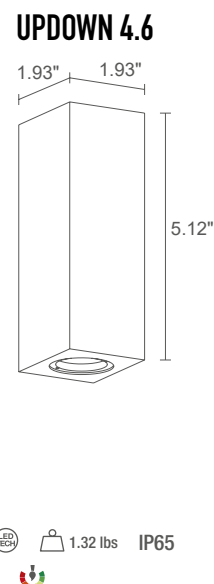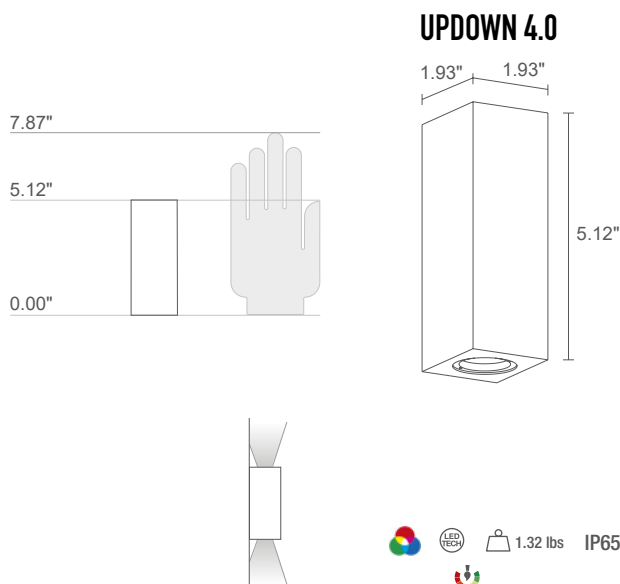

<b>MODEL NO.</b>	6W 350mA
<b>UD4061</b>	White
<b>UD4061</b>	Anodized aluminum
<b>UD4061</b>	Anthracite
<b>UD4061</b>	Cor-ten

<b>MODEL NO.</b>	6W 24VDC
<b>UD4600</b>	White
<b>UD4600</b>	Anodized aluminum
<b>UD4600</b>	Anthracite
<b>UD4600</b>	Cor-ten


<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue 6 - RGB
<b>OPTICS</b>	UP optics: S - 15° M - 22° L - 54° DOWN optics: S - 15° M - 22° L - 54°
<b>LUMEN OUTPUT AT SOURCE</b>	236 lm (3000K, 350mA) per beam RGB: 160 lm: (R) 59 lm, (G) 76 lm, (B) 25 lm (350mA) per beam
<b>DELIVERED LUMEN OUTPUT</b>	182 lm (3000K, 350mA, 22°) per beam RGB: 114 lm: (R) 42 lm, (G) 54 lm, (B) 18 lm (350mA, 22°) per beam
<b>NO. AND TYPE OF LEDS</b>	6 (3+3) power LEDs
<b>MATERIAL</b>	body in aluminum lens in transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>WIRING</b>	series
<b>MOUNTING</b>	surface mounted (wall)
<b>ACCESSORIES</b>	see accessories page

<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
<b>OPTICS</b>	UP optics: S - 15° M - 22° L - 54° DOWN optics: S - 15° M - 22° L - 54°
<b>LUMEN OUTPUT AT SOURCE</b>	236 lm (3000K) per beam
<b>DELIVERED LUMEN OUTPUT</b>	182 lm (3000K, 22°) per beam
<b>NO. AND TYPE OF LEDS</b>	6 (3+3) power LEDs
<b>MATERIAL</b>	body in aluminum lens in transparent extra-clear glass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>WIRING</b>	parallel
<b>MOUNTING</b>	surface mounted (wall)
<b>ACCESSORIES</b>	see accessories page

# UPDOWN 6



## UPDOWN 6.0

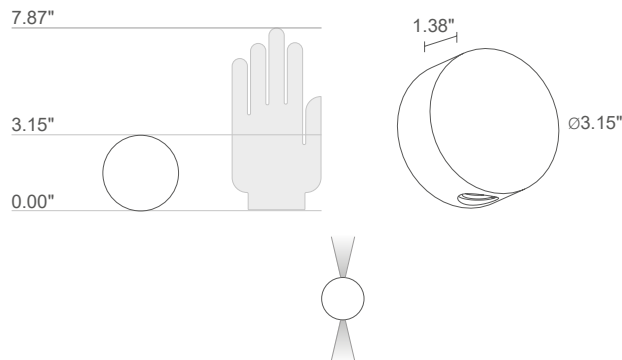


<b>MODEL NO.</b>	4W 500mA <b>UD6022</b> ■ ■ ■ <b>E</b> White <b>UD6022</b> ■ ■ ■ <b>A</b> Anodized aluminum <b>UD6022</b> ■ ■ ■ <b>H</b> Anthracite <b>UD6022</b> ■ ■ ■ <b>T</b> Cor-ten
<b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K <b>0</b> - 5000K <b>1</b> - blue
<b>OPTICS</b>	UP optics:                      DOWN optics: <b>S</b> - 10° <b>S</b> - 10° <b>M</b> - 20° <b>M</b> - 20° <b>L</b> - 40° <b>L</b> - 40°
<b>LUMEN OUTPUT AT SOURCE</b>	145 lm (3000K, 500mA) per beam
<b>DELIVERED LUMEN OUTPUT</b>	103 lm (3000K, 500mA, 20°) per beam
<b>NO. AND TYPE OF LEDS</b>	2 power LEDs
<b>MATERIAL</b>	body in aluminum lens in tempered, transparent glass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>WIRING</b>	series
<b>MOUNTING</b>	surface mounted (wall)
<b>NOTES</b>	version with RGB LED color available on request

# UPDOWN 7



## UPDOWN 7.0

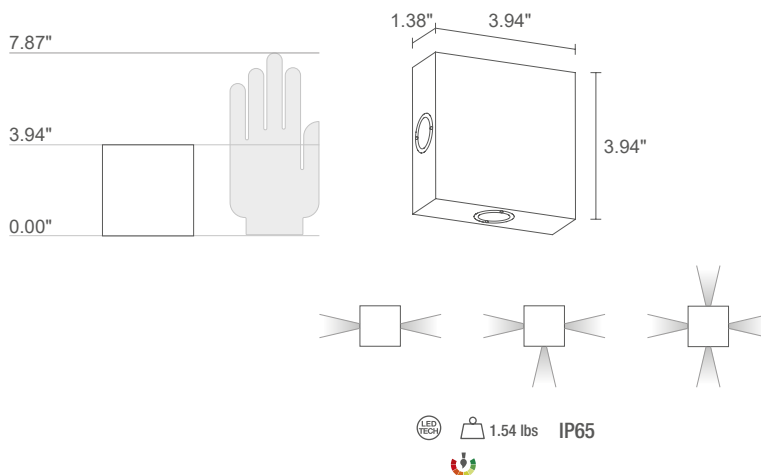


<b>MODEL NO.</b>	4W 500mA double beam
	<b>UD7022</b> ■ ■ ■ <b>E</b> White
	<b>UD7022</b> ■ ■ ■ <b>A</b> Anodized aluminum
	<b>UD7022</b> ■ ■ ■ <b>H</b> Anthracite
	<b>UD7022</b> ■ ■ ■ <b>T</b> Cor-ten
	6W 500mA 3 beams
	<b>UD7032</b> ■ ■ ■ <b>E</b> White
	<b>UD7032</b> ■ ■ ■ <b>A</b> Anodized aluminum
	<b>UD7032</b> ■ ■ ■ <b>H</b> Anthracite
	<b>UD7032</b> ■ ■ ■ <b>T</b> Cor-ten
	8W 500mA 4 beams
	<b>UD7042</b> ■ ■ ■ <b>E</b> White
<b>UD7042</b> ■ ■ ■ <b>A</b> Anodized aluminum	
<b>UD7042</b> ■ ■ ■ <b>H</b> Anthracite	
<b>UD7042</b> ■ ■ ■ <b>T</b> Cor-ten	

■ <b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K <b>0</b> - 5000K <b>1</b> - blue
■ <b>OPTICS</b>	<b>S</b> - 10° <b>M</b> - 20° <b>L</b> - 40°
<b>LUMEN OUTPUT AT SOURCE</b>	145 lm (3000K, 500mA) per beam
<b>DELIVERED LUMEN OUTPUT</b>	103 lm (3000K, 500mA, 20°) per beam
<b>NO. AND TYPE OF LEDS</b>	2, 3, 4 power LEDs
<b>MATERIAL</b>	body in aluminum lens in tempered, transparent glass
<b>POWER SUPPLY UNIT</b>	remote power supply required, not included
<b>WIRING</b>	series
<b>MOUNTING</b>	surface mounted (wall)
<b>NOTES</b>	version with RGB LED color available on request

# UPDOWN

## ACCESSORIES

### ACCESSORIES FOR INSTALLATION Updown 3 / 4



- WD0103** - White
  - WD0100** - Anodized aluminum
  - WD0104** - Anthracite
  - WD0102** - Cor-ten
- Spacer

▼

**UPDOWN 7.0**  
3000K, 4W, UP optics 20°,  
DOWN optics 10°, anodized aluminum

Atelier Martina Vidal Venezia  
Burano, Venice, Italy




# UPDOWN


## PHOTOMETRIC DATA

### UPDOWN 3.0 3.6

**S** - 15°

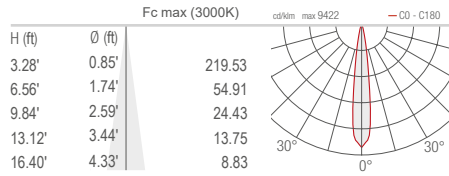


**M** - 22°

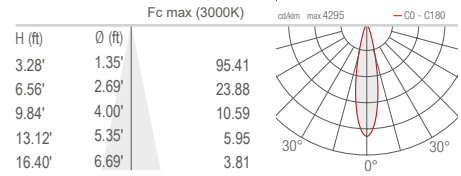


### UPDOWN 4.0 4.6

**S** - 15°

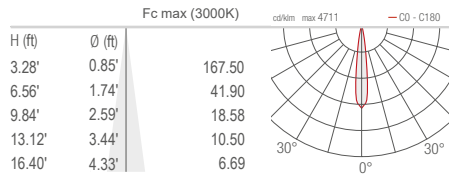


**M** - 22°

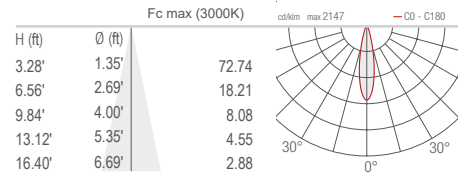


### UPDOWN 6.0 7.0

**S** - 10°

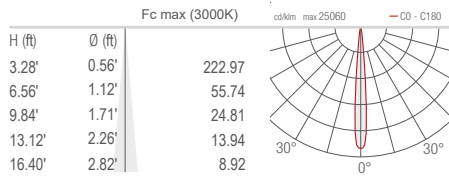


**M** - 20°

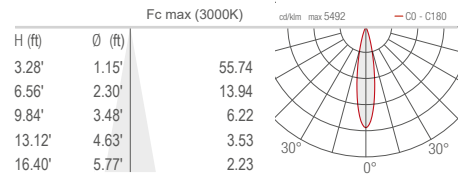





**L - 54°**

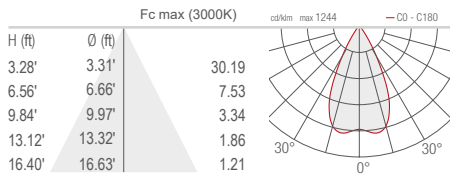

**L - 54°**

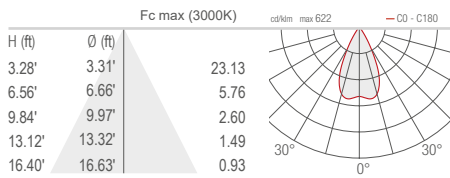

**L - 40°**

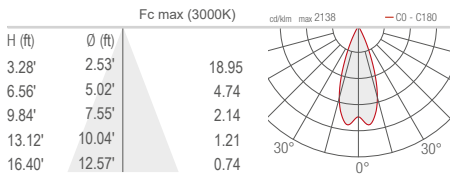

**UPDOWN 3.0 >**  
4000K, 6W, 22°, anodized aluminum

