

# Urban Furniture



ewo


designplan™ 



## E-LB21

### Illuminated Bollard with Symmetrical Optics



- To illuminate/mark area boundaries, additional accent lighting at ground level.
- Stainless Steel Bollard
- Polyester Powder Coat Finish
- $\varnothing$  4.5" x 35.4" h
- LED lighting unit in aluminum, sealed with polyurethane resin.
- Flush-mounted using buried base or surface-mounted using flange plate.
- Designed for feed-through wiring.
- 4000K
- 14.4W; IP65; IK10

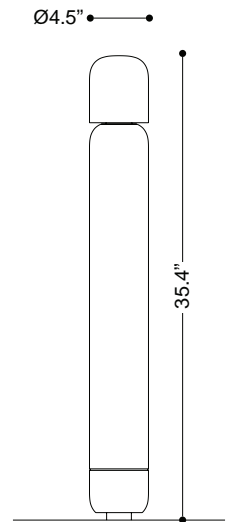

## E-LB22

### Illuminated Bollard with Symmetrical Optics


- To illuminate/mark area boundaries, additional accent lighting at ground level.
- Stainless Steel Bollard
- Polyester Powder Coat Finish
- $\varnothing$  4.5" x 23.6" h
- LED lighting unit in aluminum, sealed with polyurethane resin.
- Flush-mounted using buried base or surface-mounted using flange plate.
- Designed for feed-through wiring.
- 4000K
- 14.4W; IP65; IK10

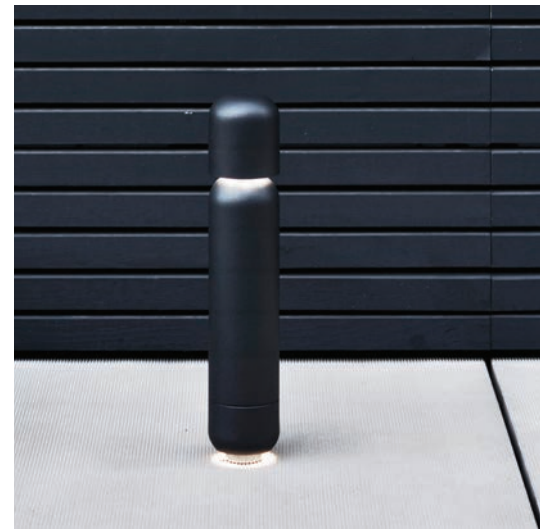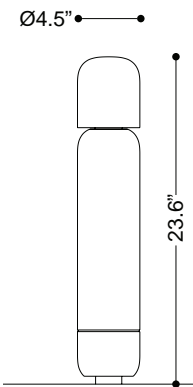

## E-LB23

### Illuminated Bollard/Seat with Symmetrical Optics


- To illuminate/mark area boundaries, additional accent lighting at ground level.
- Stainless Steel Bollard
- Polyester Powder Coat Finish
- $\varnothing$  15.75" x 15.75" h
- LED lighting unit in aluminum with transparent glass cover
- Flush-mounted using buried base or surface-mounted using flange plate.
- Designed for feed-through wiring.
- 4000K
- 21.6W; IP65; IK10

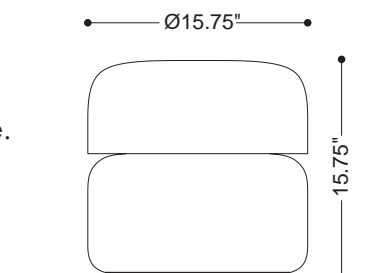



## E-BD21 Illuminated Bollard

- For marking area boundaries, additional accent lighting at ground level.
- Stainless Steel Bollard
- Polyester Powder Coat Finish
- $\varnothing$  4.5" x 35.4" h
- LED lighting unit in aluminum, sealed with polyurethane resin.
- Flush-mounted using buried base or surface-mounted using flange plate.
- Designed for feed-through wiring.
- 4000K
- 7.2W; IP65; IK10

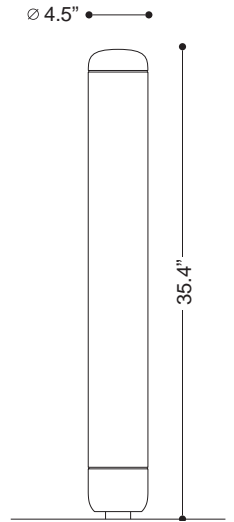

$\varnothing$  4.5"

## E-BD22 Illuminated Bollard with Chain

- For marking area boundaries, additional accent lighting at ground level.
- Stainless Steel Bollard
- Polyester Powder Coat Finish
- $\varnothing$  4.5" x 35.4" h
- Chain made of hot-dipped galvanized steel, length to be specified.
- LED lighting unit in aluminum, sealed with polyurethane resin.
- Flush-mounted using buried base or surface-mounted using flange plate.
- Designed for feed-through wiring.
- 4000K
- 7.2W; IP65; IK10




35.4"



## E-BD23 Illuminated Bollard with Integrated Ashtray

- Ashtray bollard with removable cover to aid emptying.
- Stainless Steel Bollard
- Polyester Powder Coat Finish
- $\varnothing$  4.5" x 35.4" h
- LED lighting unit in aluminum, sealed with polyurethane resin.
- Flush-mounted using buried base or surface-mounted using flange plate.
- Designed for feed-through wiring.
- 4000K
- 8.4W; IP65; IK10

$\varnothing$  4.5"

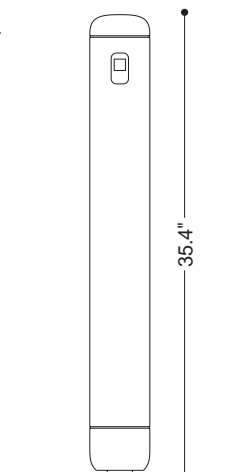







## E-SB21 Illuminated Bench

- Weatherproof Wood Bench, additional accent lighting at ground level.
- Hot-Dip Galvanized Steel Frame
- Polyester Powder Coating Finish
- 59"l x 19.7" w x 16.9" h
- LED lighting unit in aluminum, sealed with polyurethane resin.
- Flush-mounted using buried base or surface-mounted using flange plate.
- Designed for feed-through wiring.
- 4000K
- 14.4W; IP65; IK10

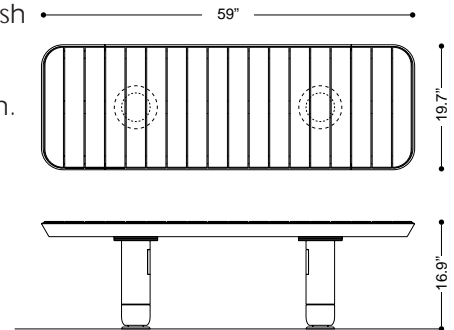

## E-WR21 Illuminated Waste Receptacle

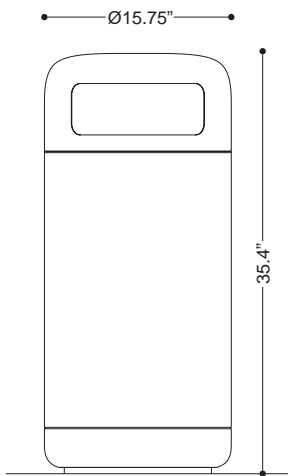


- Waste receptacle with removable cover, additional accent lighting at ground level.
- Hot-Dip Galvanized Steel Container
- Polyester Powder Coating Finish
- $\varnothing$  15.75" x 35.4" h
- 11.9 Gallon Capacity
- LED lighting unit in aluminum with transparent glass cover.
- Flush-mounted using buried base or surface-mounted using flange plate.
- Designed for feed-through wiring.
- 4000K, neutral white
- 21.6W; IP65; IK10



## E-WR22 Illuminated Waste Receptacle





- Waste receptacle with removable cover, additional accent lighting at ground level.
- Polished Stainless Steel Cover
- Polyester Powder Coating Finish
- $\varnothing$  15.75" x 28.3" h
- 11.9 Gallon Capacity
- LED lighting unit in aluminum, sealed with polyurethane resin.
- Flush-mounted using buried base or surface-mounted using flange plate.
- Designed for feed-through wiring.
- 4000K
- 21.6W; IP65; IK10

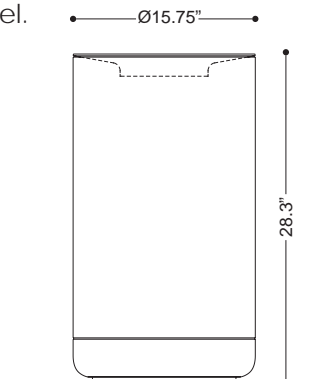



## E-BR21 Illuminated Bicycle Bollard/Rack

- Bicycle parking bollard with opening for attachment of locks, additional accent lighting at ground level.
- Steel / Stainless Steel Bollard
- Polyester Powder Coat Finish
- $\varnothing$  4.5" x 35.4" h
- LED lighting unit in aluminum, sealed with polyurethane resin.
- Flush-mounted using buried base or surface-mounted using flange plate.
- Designed for feed-through wiring.
- 4000K
- 7.2W; IP65; IK10

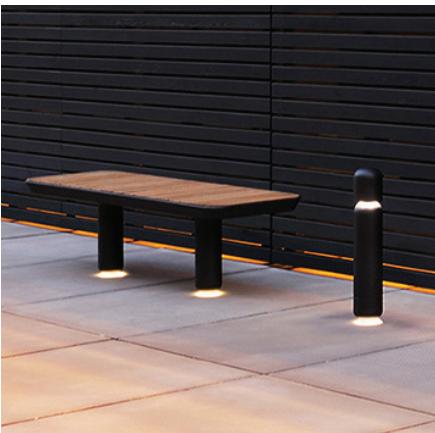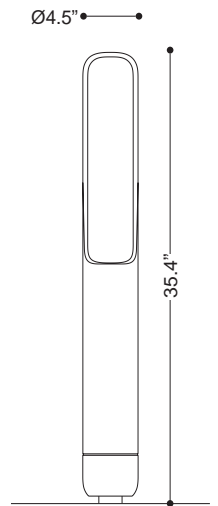

designplan™ 