


Technical features



401102P


WINDOW WAVE 2.0

Surface mounted luminaire for outdoor installation on window sill, with asymmetric 8°x170° “window-washer” light distribution. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120VAC 50-60Hz, with 1 x CREE XHP35 LED. IP65 rating.



Technical data

Wattage	7W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 1 x CREE “XHP35” LED
Screws	Stainless steel
Transformer	Electrical power supply 120VAC 50/60Hz built-in
Gasket	Silicone rubber
Diffuser	PMMA
Power cable	3.28’ power cable included
Gross weight	2.20 lbs

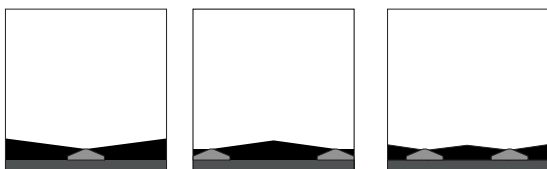

170° SINGLE INSTALLATION, IN THE MIDDLE: SUGGESTED FOR SMALL / MEDIUM SIZE WINDOWS
 170° DOUBLE INSTALLATION, ON BOTH SIDES: SUGGESTED IN CASE OF HIGH LIGHTING PERFORMANCE NEEDED
 170° DOUBLE INSTALLATION, IN THE MIDDLE: SUGGESTED FOR BIG SIZE WINDOWS



SIDE KNOCKOUT FOR CABLE

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	8° x 170°	582	83.14
4000°K neutral-white			
high-power led	8° x 170°	600	85.71

Finish color options:

