

LANDA BRICK LIGHT_AS


Landa Brick Light_AS is the asymmetrical version of Brick Light recessed die-cast aluminum wall fixture, suitable for outdoor installation and illuminating walkways, paths and private entrances. It has an asymmetrical light beam and polycarbonate opal diffuser. The body is in die-cast aluminum with finishes available in graphite and light gray. Dark sky compliant.



TECHNICAL DATA

Wattage	12W (700mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-cast Aluminum Lens: Polycarbonate Opal Diffuser
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U0-G0
CRI	>90
Delivered Lumens	95 lm (3000K)
Efficacy	6.5 lm/W
Optics	Asymmetric
Finishes	Graphite, Gray
Fixture Dimensions	9.9" l x 5.6" h x 4.0" depth
Fixture Weight	3.53 lbs
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

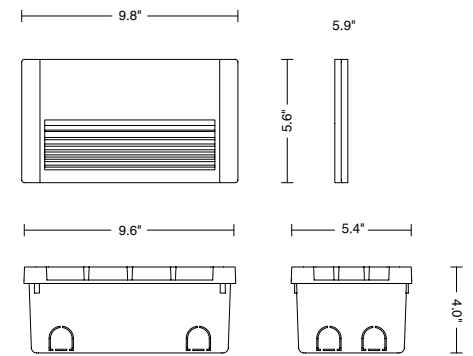

DARK SKY COMPLIANT

ORDERING INFORMATION

Example: LNBK40IPAAHBDZL.US. Power Supplies ordered separately.

LNBK4	0 IPA	A		BDZ		US
Model No.	Size	Optics	CCT	BDZ	Finish	US
LNBK4	0 IPA	A - Asymmetric	Y - 2700K H - 3000K N - 4000K	BDZ	H - Gray L - Graphite	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

700mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-1
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-2
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-2 (1-8)

For other power supply options consult factory.

ACCESSORIES - Installation (included)


HOUSING BOX - Included

PHOTOMETRIC DATA

Open - 3000K

Maximum Candela = 192.8

— C0 - C180
— C90 - C270

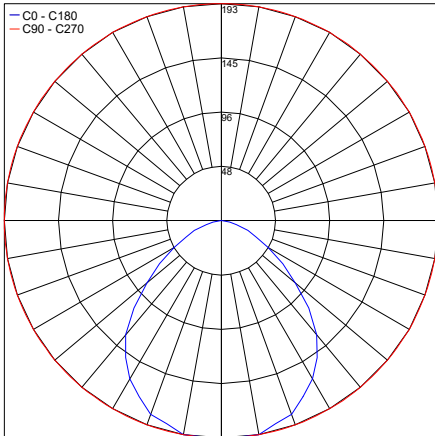


PHOTOMETRIC FILENAME : BRICK LIGHT OPEN 30K LNBK30IPADHB10X.IES

Open - 4000K

Maximum Candela = 212.1

— C0 - C180
— C90 - C270

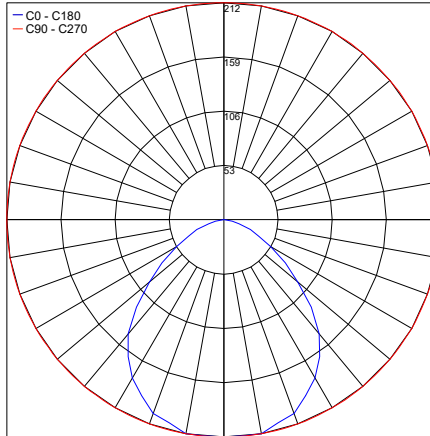


PHOTOMETRIC FILENAME : BRICK LIGHT OPEN 40K LNBK30IPADNB10X.IES

Striped - 3000K

Maximum Candela = 192.8

— C0 - C180
— C90 - C270

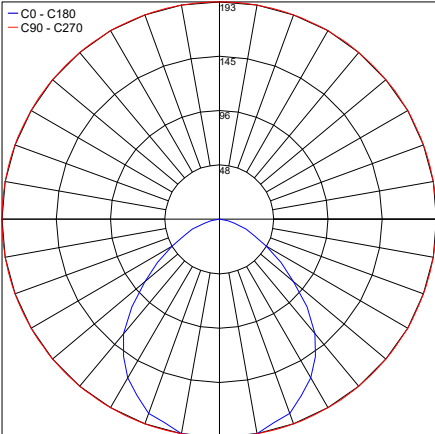


PHOTOMETRIC FILENAME : BRICK LIGHT STRIPED 30K LNBK31IPADHB10X.IES

Striped - 4000K

Maximum Candela = 212.1

— C0 - C180
— C90 - C270

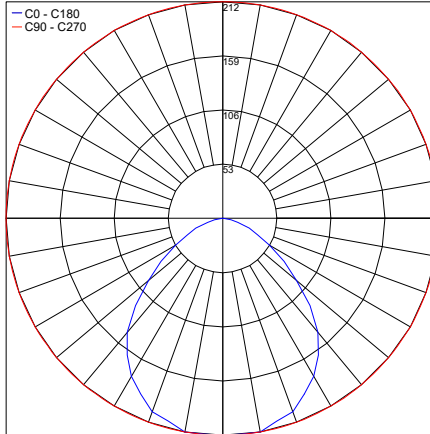

PHOTOMETRIC FILENAME : BRICK LIGHT STRIPED 40K LNBK31IPADNB10X.IES

Job Name/Date:

Fixture Type Designation: