


A classic,
the evergreen.

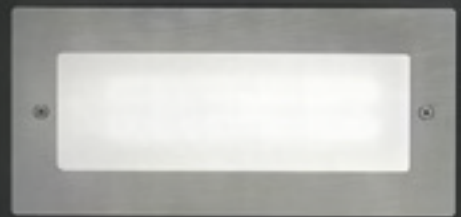

brick light


design by Landa R&D

designplan 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

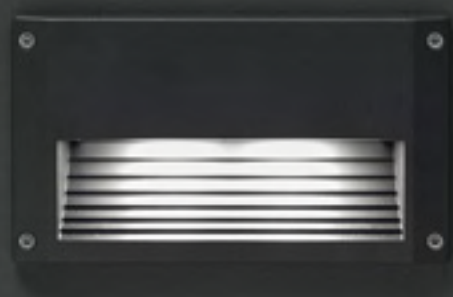

brick light

The classic of the classics, a name a guarantee. Brick light is a 5W fixture ideal for wall installations, able to provide diffused light in outdoor areas through a 0.20" tempered and sandblasted glass.

A fixture available with or without grid, extremely easy to install; a recessed product in die-cast aluminum composed of a wide range of front finishes in AISI 316L stainless steel, gray, black, white.







brick light | 5W

DIFFUSE

TECHNICAL SPECIFICATIONS

<i>Source lamp</i>	LED 5W
<i>Total wattage</i>	7W
<i>Voltage</i>	350mA, 50-60 Hz
<i>Control</i>	On/Off • dimmable on request
<i>Light color</i>	3000K • 4000K • other colors on request
<i>Delivered lumens</i> <i>*Lumens at source</i>	383 lm (700 lm*) @ 3000K 383 lm (700 lm*) @ 4000K
<i>Luminous efficacy</i>	55 lm/W @ 3000K 55 lm/W @ 4000K
<i>McADAM steps</i>	3
<i>Beam</i>	Diffuse
<i>CRI</i>	> 90
<i>Life time</i>	L70 > 50.000 h Ta 40°C
<i>IP rating</i>	IP65
<i>IK rating</i>	IK04

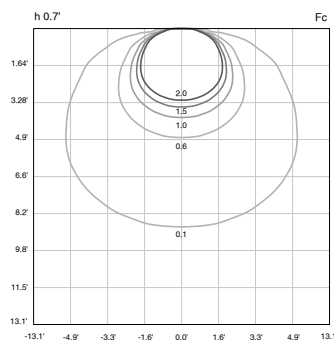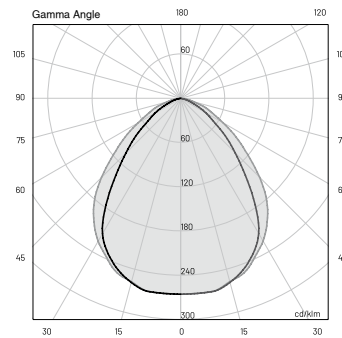

MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Frosted tempered glass 0.20"
Finishing	Polyester powder paint


ORDER CODE

BK 3 _ IPA D _ BAZ _		
	Finishing	H Gray ●
		G Black ●
		U White ○
	Light color	N 4000K
		H 3000K
	Model	0 Open
		1 Striped
Example		BK 3 0 IPA D H BAZ G


INCLUDED ACCESSORIES

Code	Description
-	Housing box

Open

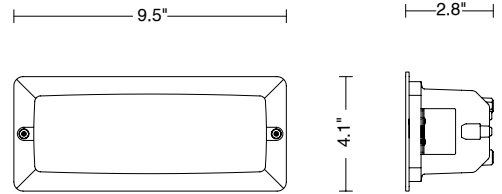

Striped

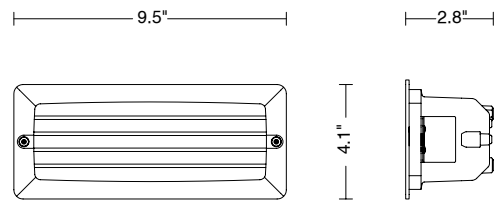



brick light | 5W

DIFFUSE




TECHNICAL SPECIFICATIONS

	DIFFUSE
Source lamp	LED 5W
Total wattage	7W
Voltage	350mA, 50-60 Hz
Control	On/Off • dimmable on request
Light color	3000K • 4000K • other colors on request
Delivered lumens *Lumens at source	383 lm (700 lm*) @ 3000K 383 lm (700 lm*) @ 4000K
Luminous efficacy	55 lm/W @ 3000K 55 lm/W @ 4000K
McADAM steps	3
Beam	Diffuse
CRI	> 90
Lifetime	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK04

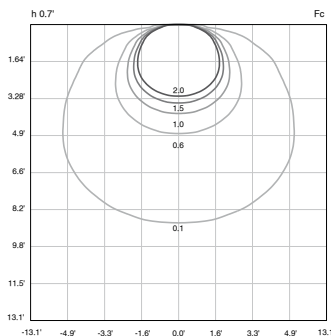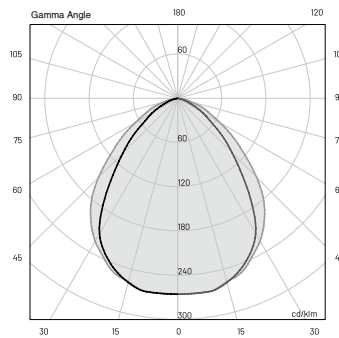

MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Frosted tempered glass 0.20"
Finishing	Inox AISI 316L 


ORDER CODE

BK 3 _ IPA D _ BAZ Z	
Light color	N 4000K
	H 3000K
Model	2 Open
	3 Striped
Example	BK 3 2 IPA D N BAZ Z



INCLUDED ACCESSORIES

Code	Description
-	Housing box

Open

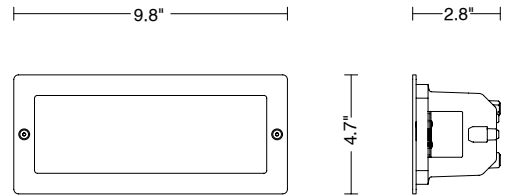

Striped

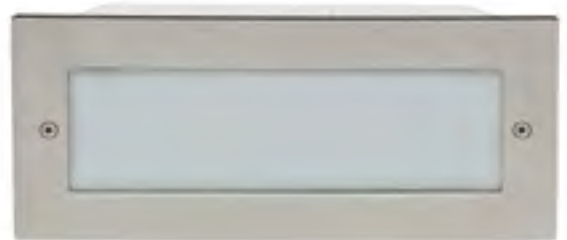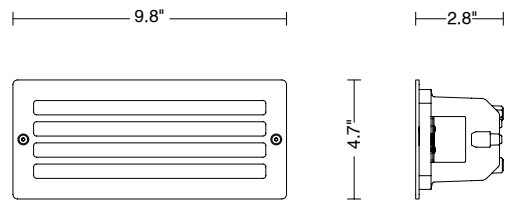





brick light_as

The asymmetrical version of Brick light, for an extremely essential luminaire that illuminates walkways and outdoor access paths and private entrances through essential light. Brick light_as is a 12 W recessed luminaire for wall installations with an asymmetrical light beam and polycarbonate opal diffuser. The body is in die-cast aluminum with finishes available in graphite and light grey.







bricklight_as | 12W

ASYMMETRIC



TECHNICAL SPECIFICATIONS

	ASYMMETRIC
Source lamp	LED 12W
Total wattage	15W
Voltage	350mA, 50-60 Hz
Control	On/Off • dimmable on request
Light color	3000K • 4000K • other colors on request
Delivered lumens *Lumens at Source	95 lm (1040 lm*) @ 3000K 95 lm (1040 lm*) @ 4000K
Luminous efficacy	6,5 lm/W @ 3000K 6,5 lm/W @ 4000K
McADAM steps	3
Beam	Asymmetric
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

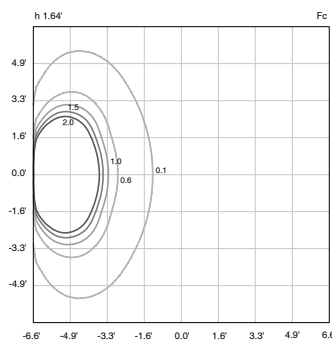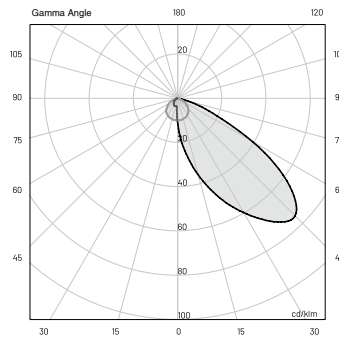

MATERIALS

Body	Die-cast aluminum
Diffuser	Opal polycarbonate
Finishing	Polyester powder paint


ORDER CODE

BK 4 0 IPA A _BDZ_

Finishing	L	Graphite	●
	H	Gray	●
Light color	N	4000 K	
	H	3000 K	

Example

BK 4 0 IPA A N BDZ L

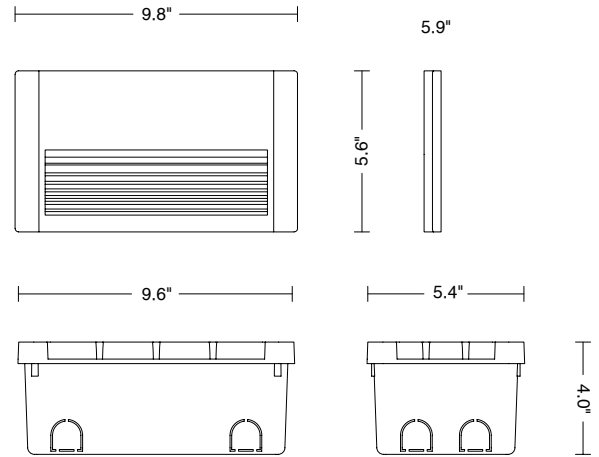

INCLUDED ACCESSORIES

Code	Description
-	Housing box





