


A classic,
the evergreen.

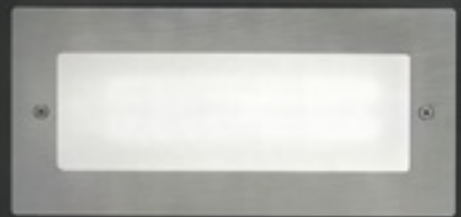

brick light

design by Landa R&D

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



brick light

The classic of the classics, a name a guarantee. Brick light is a 5W fixture ideal for wall installations, able to provide diffused light in outdoor areas through a 0.20" tempered and sandblasted glass.

A fixture available with or without grid, extremely easy to install; a recessed product in die-cast aluminum composed of a wide range of front finishes in AISI 316L stainless steel, gray, black, white.





brick light | 5W

DIFFUSE



TECHNICAL SPECIFICATIONS

Source lamp

DIFFUSE

LED 5W

Total wattage

7W

Voltage

350mA, 50-60 Hz

Control

On/Off • dimmable on request

Light color

3000K • 4000K • other colors on request

Delivered lumens
*Lumens at source

383 lm (700 lm*) @ 3000K
383 lm (700 lm*) @ 4000K

Luminous efficacy

55 lm/W @ 3000K
55 lm/W @ 4000K

McADAM steps

3

Beam

Diffuse

CRI

> 90

Life time


L70 > 50.000 h Ta 40°C

IP rating

IP65

IK rating

IK04

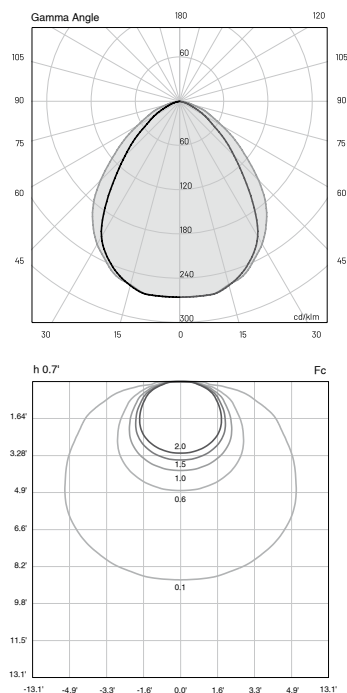

MATERIALS



Body	Die-cast aluminum EN47100
Diffuser	Frosted tempered glass 0.20"
Finishing	Polyester powder paint

ORDER CODE

BK 3 _ IPA D _ BAZ _	
Finishing	H Gray
	G Black
	U White
Light color	N 4000K
	H 3000K
Model	0 Open
	1 Striped
Example	BK 3 0 IPA D H BAZ G

INCLUDED ACCESSORIES

Code	Description
-	Housing box

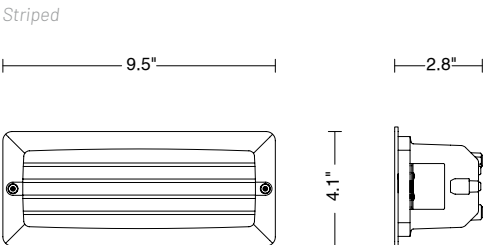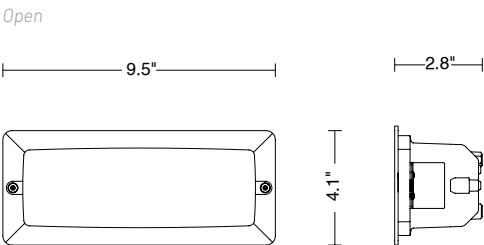

brick light | 5W

DIFFUSE



TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Delivered lumens
*Lumens at source

Luminous efficacy

McADAM steps

Beam

CRI

Lifetime

IP rating

IK rating

DIFFUSE

LED 5W

7W

350mA, 50-60 Hz

On/Off • dimmable on request

3000K • 4000K • other colors on request

383 lm (700 lm*) @ 3000K

383 lm (700 lm*) @ 4000K

55 lm/W @ 3000K

55 lm/W @ 4000K

3



Diffuse

> 90

L70 > 50.000 h Ta 40°C

IP65

IK04



MATERIALS




Body	Die-cast aluminum EN47100
Diffuser	Frosted tempered glass 0.20"
Finishing	Inox AISI 316L

ORDER CODE

BK 3 _ IPA D _ BAZ Z		
	Light color	N 4000K
		H 3000K
	Model	2 Open
		3 Striped
Example	BK 3 2 IPA D N BAZ Z	

INCLUDED ACCESSORIES

Code	Description
-	Housing box

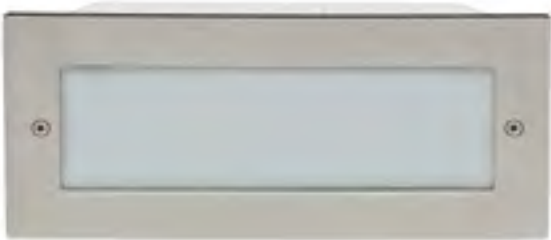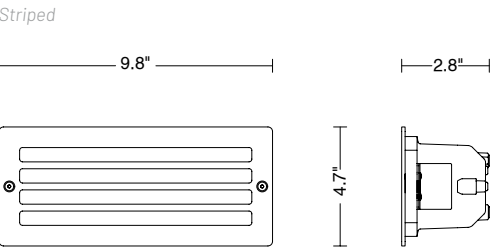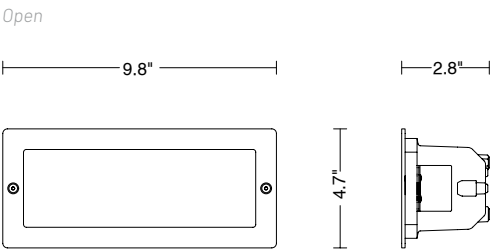





brick light_as

The asymmetrical version of Brick light, for an extremely essential luminaire that illuminates walkways and outdoor access paths and private entrances through essential light. Brick light_as is a 12 W recessed luminaire for wall installations with an asymmetrical light beam and polycarbonate opal diffuser. The body is in die-cast aluminum with finishes available in graphite and light grey.





brick light_as | 12W

ASYMMETRIC



TECHNICAL SPECIFICATIONS

Source lamp

ASYMMETRIC

LED 12W

Total wattage

15W

Voltage

350mA, 50-60 Hz

Control

On/Off • dimmable on request

Light color

3000K • 4000K • other colors on request

Delivered lumens

95 lm (1040 lm*) @ 3000K

*Lumens at Source

95 lm (1040 lm*) @ 4000K

Luminous efficacy

6.5 lm/W @ 3000K

6.5 lm/W @ 4000K

McADAM steps

3

Beam

Asymmetric

CRI

> 90

Life time



L70 > 50.000 h Ta 40°C

IP rating

IP65

IK rating

IK08




MATERIALS

Body	Die-cast aluminum
Diffuser	Opal polycarbonate
Finishing	Polyester powder paint

ORDER CODE

BK 4 0 IPA A _ BDZ _		
	Finishing	L Graphite
		H Gray
	Light color	N 4000 K
		H 3000 K
Example		BK 4 0 IPA A N BDZ L

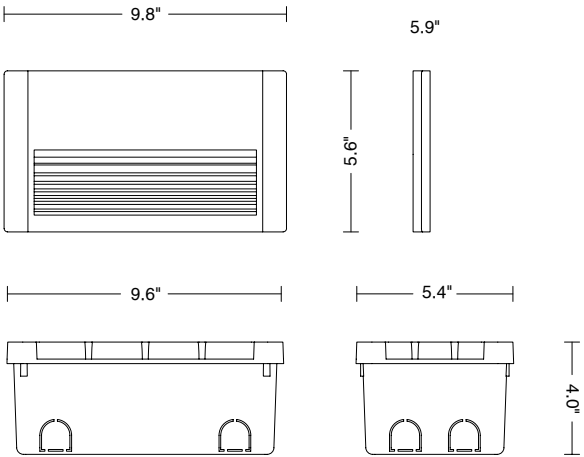

INCLUDED ACCESSORIES

Code	Description
-	Housing box





