

A classic,  
the evergreen.



brick light

design by Landa R&D

designplan 

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042



# brick light

The classic of the classics, a name a guarantee. Brick light is a 5W fixture ideal for wall installations, able to provide diffused light in outdoor areas through a 0.20" tempered and sandblasted glass.

A fixture available with or without grid, extremely easy to install; a recessed product in die-cast aluminum composed of a wide range of front finishes in AISI 316L stainless steel, gray, black, white.







# brick light | 5W

DIFFUSE

## TECHNICAL SPECIFICATIONS

Source lamp	LED 5W
Total wattage	7W
Voltage	350mA, 50-60 Hz
Control	On/Off • dimmable on request
Light color	3000K • 4000K • other colors on request
Delivered lumens *Lumens at source	383 lm (700 lm*) @ 3000K 383 lm (700 lm*) @ 4000K
Luminous efficacy	55 lm/W @ 3000K 55 lm/W @ 4000K
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK04

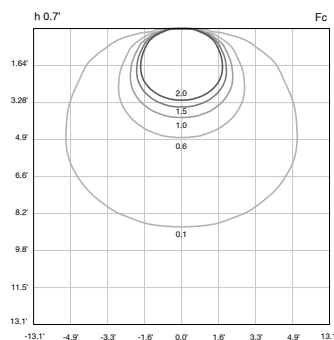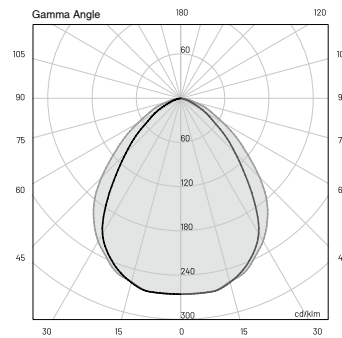

## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Frosted tempered glass 0.20"
Finishing	Polyester powder paint


## ORDER CODE

BK 3	_	IPAD	_	B 10	_	Finishing	H	Gray	●
						G	Black	●	
						Light color	U	White	○
							N	4000K	
							H	3000K	
						Model	0	Open	
							1	Striped	
						Example	BK 3 0 IPAD HB 10 G		


## INCLUDED ACCESSORIES

Code	Description
-	Housing box

Open

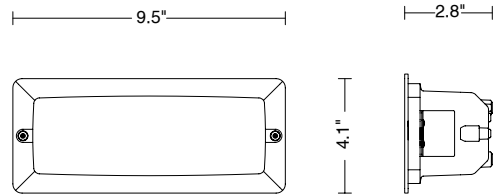

Striped

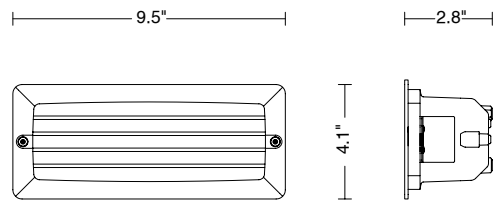



# brick light | 5W

DIFFUSE




## TECHNICAL SPECIFICATIONS

	DIFFUSE
Source lamp	LED 5W
Total wattage	7W
Voltage	350mA, 50-60 Hz
Control	On/Off • dimmable on request
Light color	3000K • 4000K • other colors on request
Delivered lumens *Lumens at source	383 lm (700 lm*) @ 3000K 383 lm (700 lm*) @ 4000K
Luminous efficacy	55 lm/W @ 3000K 55 lm/W @ 4000K
McADAM steps	3
Beam	Diffuse
CRI	> 90
Lifetime	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK04

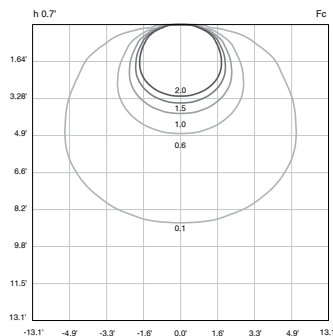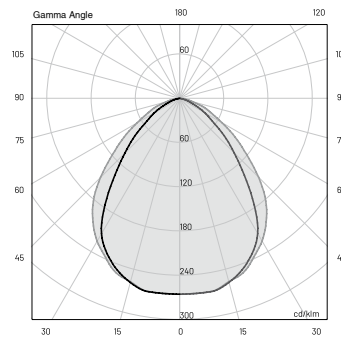

## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Frosted tempered glass 0.20"
Finishing	Inox AISI 316L 


## ORDER CODE

BK 3 _ IPAD _ B 10 Z	Light color	N	4000K
		H	3000K
Model	2	Open	
	3	Striped	
Example		BK 3 2 IPAD N B 10 Z	


## INCLUDED ACCESSORIES

Code	Description
-	Housing box

Open

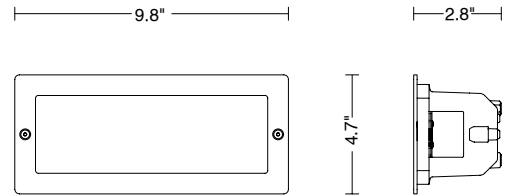

Striped

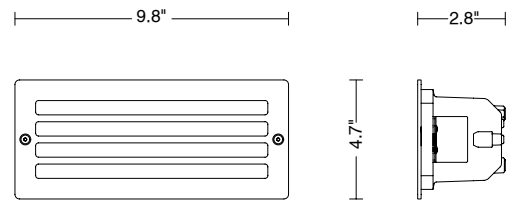







# brick light\_as

The asymmetrical version of Brick light, for an extremely essential luminaire that illuminates walkways and outdoor access paths and private entrances through essential light. Brick light\_as is a 12 W recessed luminaire for wall installations with an asymmetrical light beam and polycarbonate opal diffuser. The body is in die-cast aluminum with finishes available in graphite and light grey.









# brick light\_as | 12W

ASYMMETRIC

## TECHNICAL SPECIFICATIONS

<i>Source lamp</i>	LED 12W
<i>Total wattage</i>	15W
<i>Voltage</i>	350mA, 50-60 Hz
<i>Control</i>	On/Off • dimmable on request
<i>Light color</i>	3000K • 4000K • other colors on request
<i>Delivered lumens</i> <i>*Lumens at Source</i>	95 lm (1040 lm*) @ 3000K 95 lm (1040 lm*) @ 4000K
<i>Luminous efficacy</i>	6,5 lm/W @ 3000K 6,5 lm/W @ 4000K
<i>McADAM steps</i>	3
<i>Beam</i>	Asymmetric
<i>CRI</i>	> 90
<i>Life time</i>	L70 > 50.000 h Ta 40°C
<i>IP rating</i>	IP65
<i>IK rating</i>	IK08

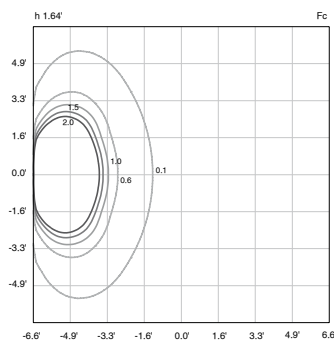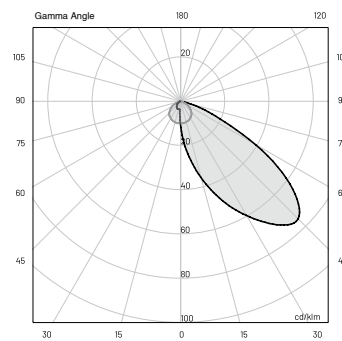

## MATERIALS


Body	Die-cast aluminum
Diffuser	Opal polycarbonate
Finishing	Polyester powder paint

## ORDER CODE

BK 4 0 IPA A \_ B 10 \_

Finishing	L	Graphite	●
	H	Gray	●
Light color	N	4000 K	
	H	3000 K	

Example BK 4 0 IPA A N B 10 L

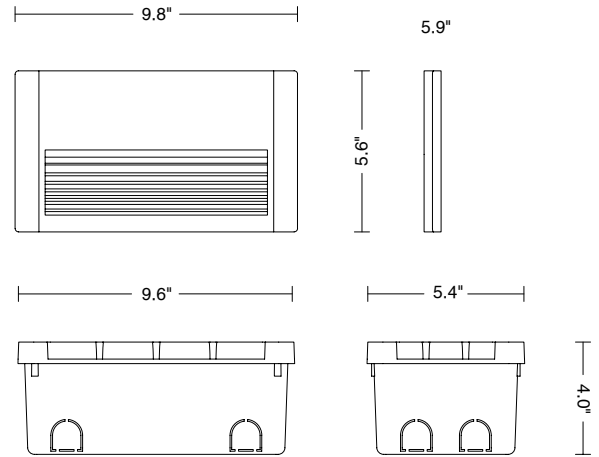

## INCLUDED ACCESSORIES

Code	Description
-	Housing box







