

LANDA BRICK LIGHT

Landa Brick Light is a classic recessed die-cast aluminum wall fixture, suitable for outdoor or indoor installation, that provides diffused light through a 0.20" tempered and sandblasted glass. It is available with or without grid, is extremely easy to install, and comes in a wide range of front finishes.



TECHNICAL DATA

Wattage	5W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-cast aluminum Lens: Tempered, Sandblasted Glass 0.2"
CCT	3000K, 4000K (other colors on request)
BUG Rating	B0-U0-G0
CRI	>90
Delivered Lumens	383 lm (3000K)
Efficacy	55 lm/W
Optics	Diffuse
Finishes	Stainless Steel, Gray, Black, White
Fixture Dimensions	9.5" l x 4.1" h x 2.8" depth
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK04

ORDERING INFORMATION


Example: LNBK30IPADHBAZG.US. Power Supplies ordered separately.

LNBK3		D		BAZ		US
Model No.	Size	Optics	CCT		Finish	
LNBK3	0 IPA- Open 1 IPA- Striped	D - Diffuse	N - 4000K H - 3000K	BAZ	H - Gray G - Black U - White	US
	2 IPA - Open (SS) 3 IPA - Striped (SS)				Z - Stainless Steel	

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

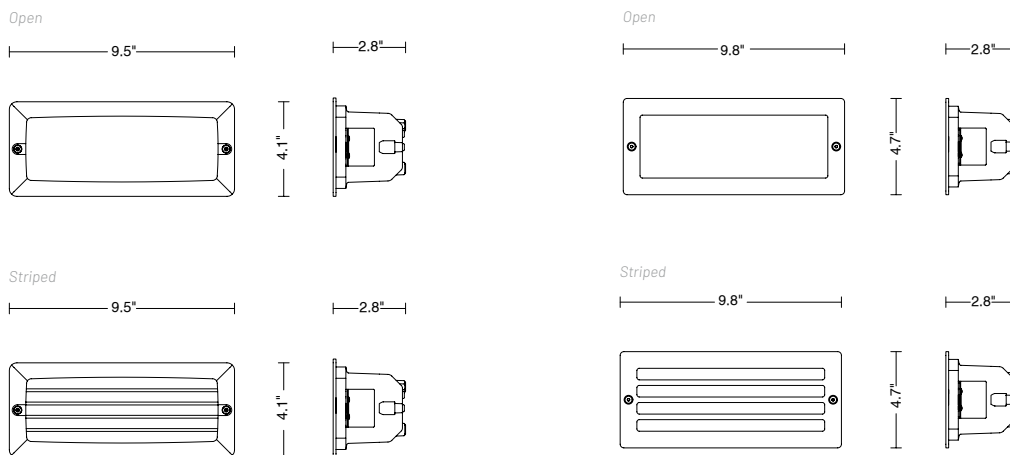

Stainless Steel Finish

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-1
PPLT00214	0-10V Dimming to 10%	120-277VAC to 350mA, 30W, Class 2, IP66	2-2
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-1 (1-4)

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation


HOUSING BOX - *Included*

PHOTOMETRIC DATA

Open - 3000K

Maximum Candela = 192.8

— C0 - C180
— C90 - C270

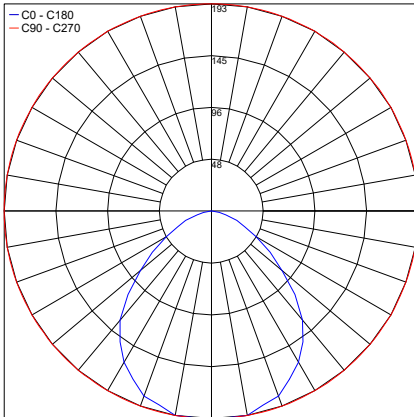


PHOTOMETRIC FILENAME : BRICK LIGHT OPEN 30K LNBK30IPADHB10X.IES

Open - 4000K

Maximum Candela = 212.1

— C0 - C180
— C90 - C270

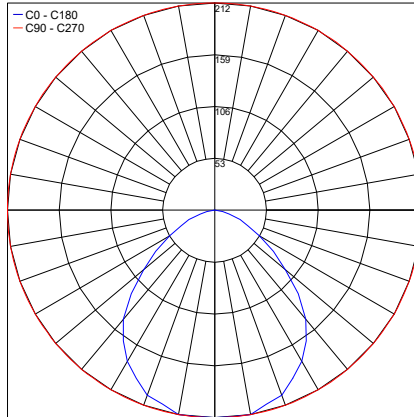


PHOTOMETRIC FILENAME : BRICK LIGHT OPEN 40K LNBK30IPADNB10X.IES

Striped - 3000K

Maximum Candela = 192.8

— C0 - C180
— C90 - C270

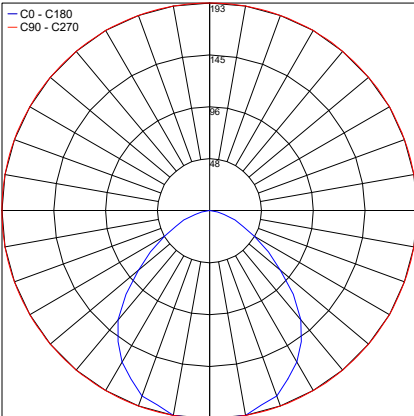


PHOTOMETRIC FILENAME : BRICK LIGHT STRIPED 30K LNBK31IPADHB10X.IES

Striped - 4000K

Maximum Candela = 212.1

— C0 - C180
— C90 - C270

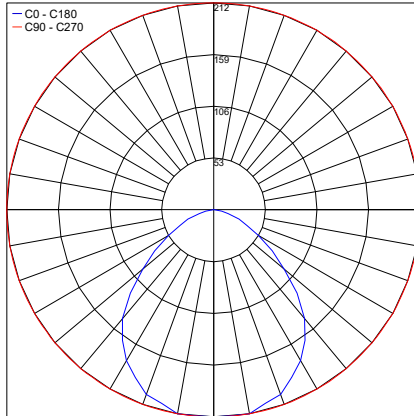

PHOTOMETRIC FILENAME : BRICK LIGHT STRIPED 40K LNBK31IPADNB10X.IES

Job Name/Date:

Fixture Type Designation: