


KUBS Bollard is a square outdoor bollard with a harmonious design suitable for outdoor installation. It is available in single- or double-beam asymmetric light emission and 3 standard finishes. Also available as a wall-mounted fixture.



## TECHNICAL DATA

<b>LED Wattage / Total</b>	3W Single, 6W Double
<b>Power Supply</b>	Integral 120VAC
<b>Dimming</b>	Consult factory for dimmable options
<b>Construction</b>	Body: Die-cast aluminum EN47100 Lens: Extra clear PMMA
<b>CCT</b>	3000K (other colors on request)
<b>CRI</b>	>90
<b>BUG Rating</b>	B0-U0-G0 (3W - single spot / flood) B0-U2-G0 (6W - double spot) B0-U3-G0 (6W - double flood)
<b>Delivered Lumens</b>	119 lm (3W, single) 240 lm (6W, single)
<b>Efficacy</b>	39.7 lm/W (3W, single) 40 lm/W (6W, single)
<b>Optics</b>	Asymmetric
<b>Finishes</b>	3 Standard, See Below
<b>Fixture Dimensions</b>	Head: 4.9" sq. x 3.5" Base: 4.7" / 13.8" / 27.6" h
<b>Lumen Maintenance</b>	L70 >50,000 hrs (Ta 40°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK08

Fixture Dimensions

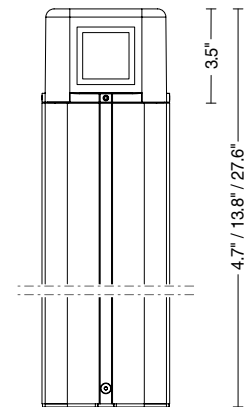

## ORDERING INFORMATION

Example: LNKU30035AHBAZV.US. Accessories / Power Supplies ordered separately.

Model No.	Height	Optics	CCT	Version	Finish	US
LNKU30 (3W)	012 - 4.72" 035 - 13.78" 070 - 27.56"	A - Asymmetric 4 - Double Asymmetric	H - 3000K	BAZ - 3W version BDZ - 6W version	L - Graphite V - Oxide H - Gray	US
LNKU31 (6W)		A - Asymmetric				

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - Installation



**00A404.01P**  
Anchor bolt




**0404M003**  
Loop-In Loop-Out

## PHOTOMETRIC DATA

Note: All photometric data is 3000K


### 3W - Single Spot 10°

Maximum Candela = 105.9

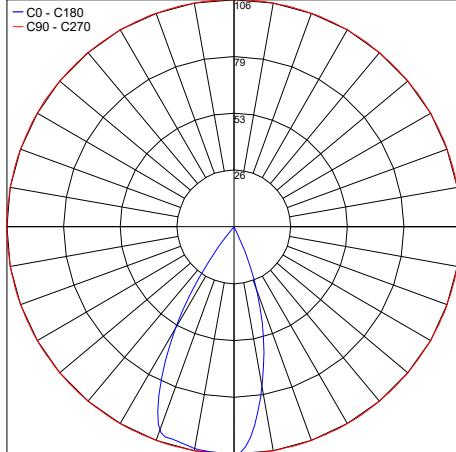


### 3W - Single Flood 45°

Maximum Candela = 212.8

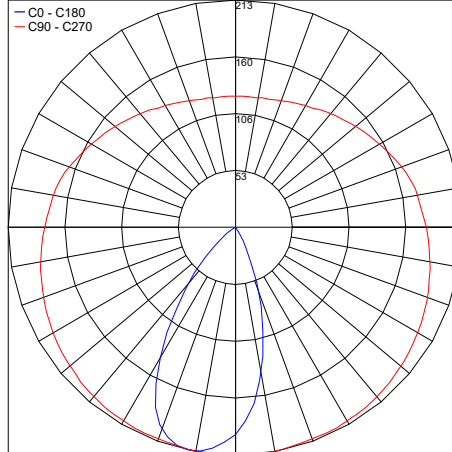


### 6W - Double Spot 10°

Maximum Candela = 100

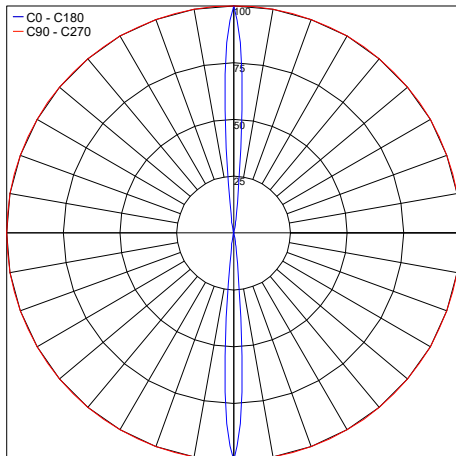


### 6W - Double Flood 45°

Maximum Candela = 212.8

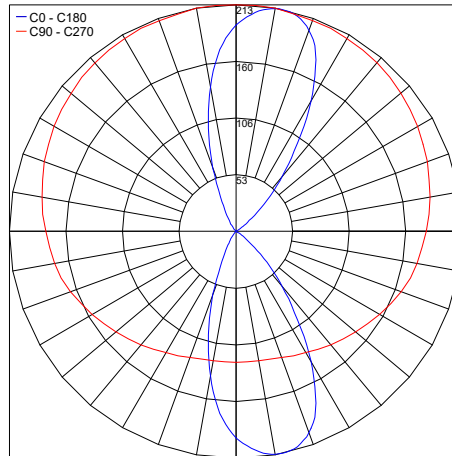

### 6W - Double Spot / Flood

Maximum Candela = 212.8

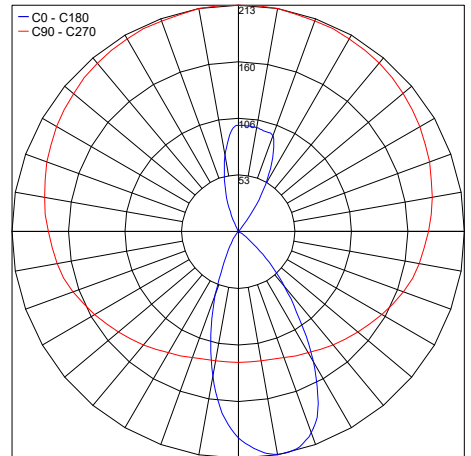

Job Name/Date:

Fixture Type Designation: