

Harmony and Functionality.

kubs

design by Landa R&D

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



kubs

Harmonious and compact design, a 3D bollard with variable height, perfect for enhancing and illuminating external paths and access routes. A luminaire supplied with 3W and 6W single or double emission power with asymmetrical light beam. The two available finishes, graphite and oxide, expand the aesthetic possibilities, combining function with technical quality. Precise light beams for high impact effects even in extreme outdoor conditions.

KUBS | WALL LAMP also available





kubs

SINGLE ASYMMETRIC

3W



TECHNICAL SPECIFICATIONS

Source lamp

SINGLE ASYMMETRIC

LED 3W

Total wattage

5.5W

Voltage

120 VAC, 50-60 Hz

Control

On/Off • Consult factory for dimmable options

Light color

3000K • other colors on request

Delivered lumens
*Lumens at source

119 lm (260 lm*)

Luminous efficacy

22 lm/W

McADAM steps

3

Beam

Asymmetric

CRI

> 90

Life time


L70 > 50.000 h Ta 40°C

IP rating

IP65


IK rating

IK08

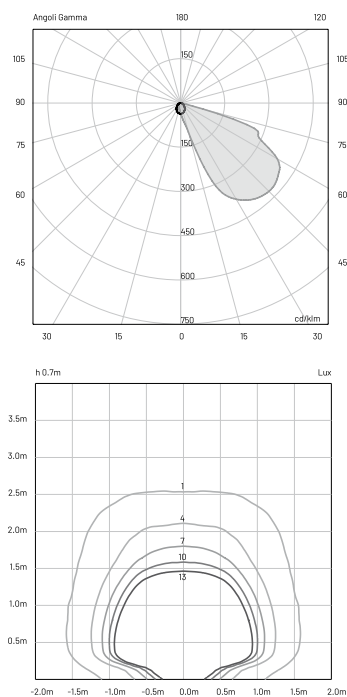

MATERIALS

Body	Die-cast aluminum EN47100 and extruded aluminum EN AW6060
Diffuser	Extra clear PMMA
Finishing	Polyester powder paint

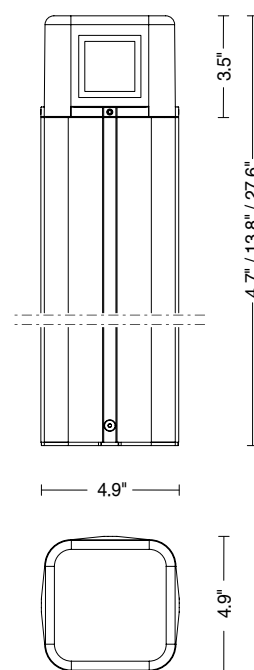

ORDER CODE

Diagram illustrating the breakdown of the code **KU 30 AHB AZ L V** into its components:

- KU 30**: Base code
- AHB**: Material (Aluminum)
- AZ**: Finish (Anodized)
- L**: Length (12 inches)
- V**: Color (Black)

The diagram shows the code being split into two parts: **KU 30 AHB AZ** and **L V**. The first part, **KU 30 AHB AZ**, is further broken down into **KU 30** (Base code), **AHB** (Material), and **AZ** (Finish). The second part, **L V**, is broken down into **L** (Length) and **V** (Color).

AVAILABLE ACCESSORIES

Code	Description
00A404.01P	Anchor bolt
0404M003	Loop-in loop-out IP68



kubs

SINGLE ASYMMETRIC

6W



TECHNICAL SPECIFICATIONS

Source lamp

SINGLE ASYMMETRIC

LED 6W

Total wattage

9W

Voltage

120 VAC, 50-60 Hz

Control

On/Off • Consult factory for dimmable options

Light color

3000K • other colors on request

Delivered lumens
*Lumens at source

240 lm (520 lm*)

Luminous efficacy

27 lm/W

McADAM steps

3

Beam

Asymmetric

CRI

> 90

Lifetime


L70 > 50.000 h Ta 40°C

IP rating

IP65

IK rating

IK08

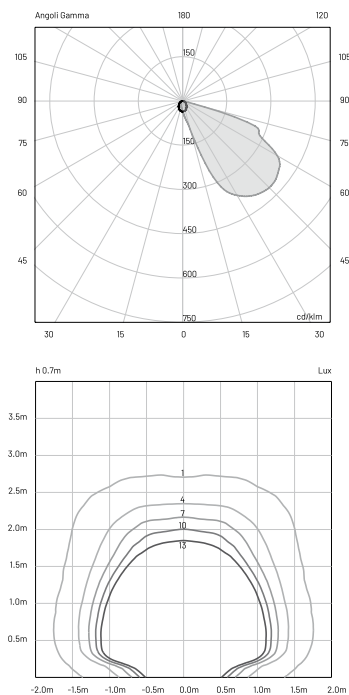

MATERIALS


Body	Die-cast aluminum EN47100 and extruded aluminum EN AW6060
Diffuser	Extra clear PMMA
Finishing	Polyester powder paint

ORDER CODE

Diagram illustrating the breakdown of the part number **KU 3 1 A H B D Z** into its constituent options:

- A**: Finishing, Height
- H**: Graphite, Oxide
- B**: 012 4.72"
- D**: 035 13.78"
- Z**: 070 27.56"

Example: **KU 3 1 012 A H B D Z L**

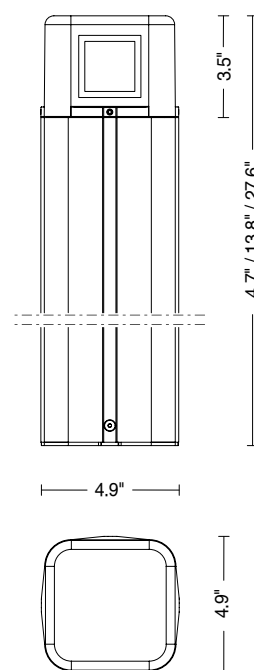

AVAILABLE ACCESSORIES

Code	Description
00A404.01P	Anchor bolt
0404M003	Loop-in loop-out IP68



kubs

DOUBLE ASYMMETRIC

6W



TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Delivered lumens
*Lumens at source

Luminous efficacy

McADAM steps

Beam

CRI

Life time

IP rating

IK rating

DOUBLE ASYMMETRIC

LED 6W

9W

120 VAC, 50-60 Hz

On/Off • Consult factory for dimmable options

3000K • other colors on request

240 lm (520 lm*)

27 lm/W

3


Asymmetric

> 90

L70 > 50.000 h Ta 40°C


IP65

IK08

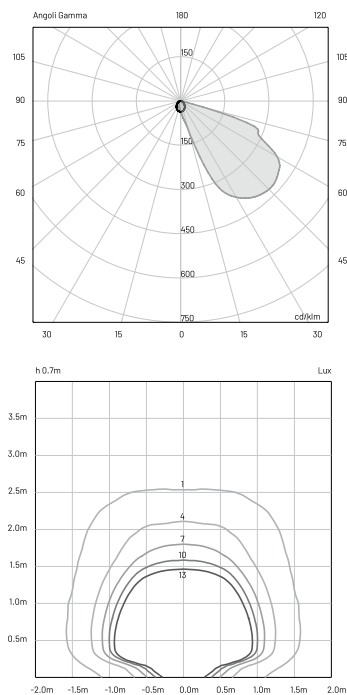

MATERIALS

Body	Die-cast aluminum EN47100 and extruded aluminum EN AW6060
Diffuser	Extra clear PMMA
Finishing	Polyester powder paint

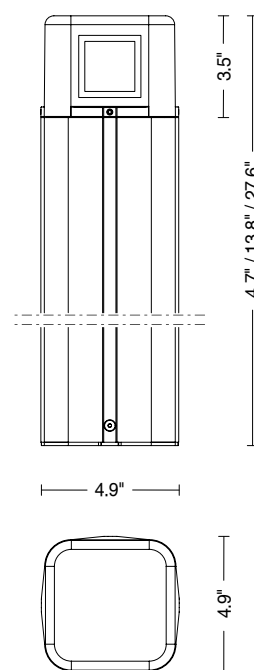

ORDER CODE

The diagram shows a cross-section of a 4HBAZ L part. The part is labeled "KU 30" at the top left and "4 HBAZ L" at the top right. The "L" is highlighted in red. The part has a total length of 4.72" and a height of 13.78". The material is Graphite. The part is shown with a 4HBAZ L finish, which is a black oxide finish.

Dimensions:

- Length: 4.72"
- Height: 13.78"

Material: Graphite

Finish: 4HBAZ L

AVAILABLE ACCESSORIES

Code	Description
00A404.01P	Anchor bolt
0404M003	Loop-in loop-out IP68





