

# Harmony and functionality.

kubs

design by Landa R&D

designplan 

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042



# kubs

Four sides and absolute 3D, Kubs is a perfect wall luminaire for the enhancement of facades through a simple and scenic light. A harmonious compact design; a luminaire supplied with 3W and 6W single- or double-emission power with spot and flood optics.

Two available finishes, graphite and oxide, increase the variety of possible installations, combining aesthetic function with technical quality. Precise light beams for high impact effects on residential and receptive buildings.

**KUBS | BOLLARD also available**





# kubs


# 3W

SINGLE SPOT • SINGLE FLOOD




## TECHNICAL SPECIFICATIONS

	SINGLE SPOT	SINGLE FLOOD
Source lamp	LED 3W	LED 3W
Total wattage	5.5 W	5.5 W
Voltage	120 VAC, 50-60 Hz	120 VAC, 50-60 Hz
Control	On/Off • Consult factory for dimmable options	On/Off • Consult factory for dimmable options
Light color	3000K • other colors on request	3000K • other colors on request
Delivered lumens *Lumens at source	15 lm (260 lm*)	128 lm (260 lm*)
Luminous efficacy	3 lm/W	24 lm/W
McADAM steps	3	3
Beam	10°	45°
CRI	> 90	> 90
Lifetime	L70 > 50.000 h Ta 40°C	L70 > 50.000 h Ta 40°C
IP rating	IP65	IP65
IK rating	IK08	IK08




E (FC)		
H (ft)	fc (3000 K)	Ø (ft)
3.28'	9.85	0.49'
6.56'	2.42	0.98'
9.84'	1.11	1.48'
13.12'	0.65	1.97'
16.40'	0.37	2.46'

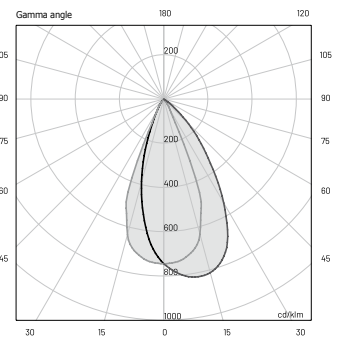

E (FC)		
H (ft)	fc (3000 K)	Ø (ft)
3.28'	19.05	2.62'
6.56'	4.74	5.25'
9.84'	2.14	7.87'
13.12'	1.21	10.50'
16.40'	0.74	13.12'

## MATERIALS

<i>Body</i>	<u>Die-cast aluminum EN47100</u>
<i>Diffuser</i>	<u>Extra clear PMMA</u>
<i>Finishing</i>	<u>Polyester powder paint</u>

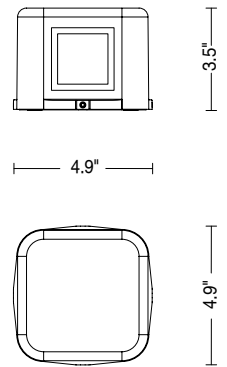

## ORDER CODE

<b>KU 3 0 PAR _ H B A Z _</b>		
	<i>Finishing</i>	<b>L</b> Graphite ●
		<b>V</b> Oxide ●
	<i>Beam</i>	<b>S</b> Spot
		<b>F</b> Flood
<i>Example</i>		<u>KU 3 0 PAR S H B A Z L</u>



# kubs


# 6W

SINGLE SPOT • SINGLE FLOOD




## TECHNICAL SPECIFICATIONS

	SINGLE SPOT	SINGLE FLOOD
Source lamp	LED 6W	LED 6W
Total wattage	9W	9W
Voltage	120 VAC, 50-60 Hz	120 VAC, 50-60 Hz
Control	On/Off • Consult factory for dimmable options	On/Off • Consult factory for dimmable options
Light color	3000K • other colors on request	3000K • other colors on request
Delivered lumens *Lumens at source	26 lm (520 lm*)	250 lm (520 lm*)
Luminous efficacy	3 lm/W	28 lm/W
McADAM steps	3	3
Beam	10°	45°
CRI	> 90	> 90
Life time	L70 > 50.000 h Ta 40°C	L70 > 50.000 h Ta 40°C
IP rating	IP65	IP65
IK rating	IK08	IK08




E (FC)		
H (ft)	fc (3000 K)	Ø (ft)
3.28'	18.12	0.49'
6.56'	4.55	0.98'
9.84'	2.04	1.48'
13.12'	1.11	1.97'
16.40'	0.74	2.46'



E (FC)		
H (ft)	fc (3000 K)	Ø (ft)
3.28'	37.16	2.62'
6.56'	9.29	5.25'
9.84'	4.09	7.87'
13.12'	2.32	10.50'
16.40'	1.49	13.12'

## MATERIALS

<i>Body</i>	<u>Die-cast aluminum EN47100</u>
<i>Diffuser</i>	<u>Extra clear PMMA</u>
<i>Finishing</i>	<u>Polyester powder paint</u>

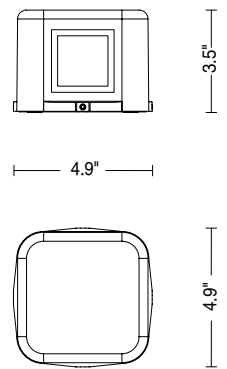

## ORDER CODE

KU 3 1 PAR \_ H B D Z \_

<i>Finishing</i>	<u>L</u> Graphite ●
	<u>V</u> Oxide ●
<i>Beam</i>	<u>S</u> Spot
	<u>F</u> Flood

*Example* KU 3 1 PAR S H B D Z L





# kubs


# 6W

DOUBLE SPOT • DOUBLE FLOOD • DOUBLE SPOT/FLOOD




## TECHNICAL SPECIFICATIONS

	DOUBLE SPOT	DOUBLE FLOOD
Source lamp	LED 6W	LED 6W
Total wattage	9W	9W
Voltage	120 VAC, 50-60 Hz	120 VAC, 50-60 Hz
Control	On/Off • Consult factory for dimmable options	On/Off • Consult factory for dimmable options
Light color	3000K • other colors on request	3000K • other colors on request
Delivered lumens *Lumens at source	30 lm (520 lm*)	256 lm (520 lm*)
Luminous efficacy	3.5 lm/W	29 lm/W
McADAM steps	3	3
Beam	10° / 10°	45° / 45°
CRI	> 90	> 90
Lifetime	L70 > 50.000 h Ta 40°C	L70 > 50.000 h Ta 40°C
IP rating	IP65	IP65
IK rating	IK08	IK08




E (FC)		
H (ft)	fc (3000 K)	Ø (ft)
3.28'	2 x 9.85	0.49'
6.56'	2 x 2.42	0.98'
9.84'	2 x 1.11	1.48'
13.12'	2 x 0.65	1.97'
16.40'	2 x 0.37	2.46'

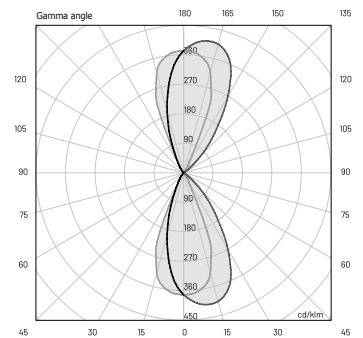

E (FC)		
H (ft)	fc (3000 K)	Ø (ft)
3.28'	2 x 19.05	2.62'
6.56'	2 x 4.74	5.25'
9.84'	2 x 2.14	7.87'
13.12'	2 x 1.21	10.50'
16.40'	2 x 0.74	13.12'

## TECHNICAL SPECIFICATIONS

	<b>DOUBLE SPOT/FLOOD</b>
Source lamp	LED 6W
Total wattage	9W
Voltage	120 VAC, 50-60 Hz
Control	On/Off • Consult factory for dimmable options
Light color	3000K • other colors on request
Delivered lumens *Lumens at source	143 lm (520 lm*)
Luminous efficacy	16 lm/W
McADAM steps	3
Beam	10° / 45°
CRI	> 90
Lifetime	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

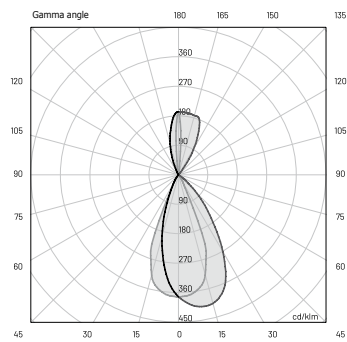


### E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	19.05 / 9.85	2.62' / 0.49'
6.56'	4.74 / 2.42	5.25' / 0.98'
9.84'	2.14 / 1.11	7.87' / 1.48'
13.12'	1.21 / 0.65	10.50' / 1.97'
16.40'	0.74 / 0.37	13.12' / 2.46'



## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Extra clear PMMA
Finishing	Polyester powder paint

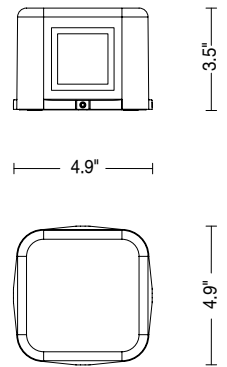

## ORDER CODE

KU 3 0 PAR \_ H B A Z \_

Finishing	L	Graphite	●
	V	Oxide	●
Beam	1	Double spot	
	3	Double flood	
	6	Double spot/flood	

Example KU 3 0 PAR 1 H B A Z L

