

Harmony and functionality.

kubs

design by Landa R&D

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



kubs

Four sides and absolute 3D, Kubs is a perfect wall luminaire for the enhancement of facades through a simple and scenic light. A harmonious compact design; a luminaire supplied with 3W and 6W single- or double-emission power with spot and flood optics.

Two available finishes, graphite and oxide, increase the variety of possible installations, combining aesthetic function with technical quality. Precise light beams for high impact effects on residential and receptive buildings.

KUBS | BOLLARD also available





kubs

SINGLE SPOT • SINGLE FLOOD

3W



TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Delivered lumens
*Lumens at source

Luminous efficacy

McADAM steps

Beam

CRI

Lifetime

IP rating

IK rating

SINGLE SPOT

LED 3W

5.5 W

120 VAC, 50-60 Hz

On/Off • Consult factory for dimmable options

3000K • other colors on request

15 lm (260 lm*)

3 lm/W

3

10°

> 90

L70 > 50.000 h Ta 40°C

IP65

IK08

SINGLE FLOOD

LED 3W

5.5 W

120 VAC, 50-60 Hz

On/Off • Consult factory for dimmable options

3000K • other colors on request

128 lm (260 lm*)

24 lm/W

3


45°

> 90

L70 > 50.000 h Ta 40°C


IP65

IK08



E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	9.85	0.49'
6.56'	2.42	0.98'
9.84'	1.11	1.48'
13.12'	0.65	1.97'
16.40'	0.37	2.46'

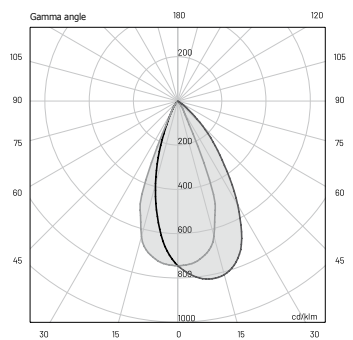

E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	19.05	2.62'
6.56'	4.74	5.25'
9.84'	2.14	7.87'
13.12'	1.21	10.50'
16.40'	0.74	13.12'

kubs

SINGLE SPOT • SINGLE FLOOD

| 6W



TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Delivered lumens
*Lumens at source

Luminous efficacy

McADAM steps

Beam

CRI

Life time

IP rating

IK rating

SINGLE SPOT

LED 6W

9W

120 VAC, 50-60 Hz

On/Off • Consult factory for dimmable options

3000K • other colors on request

26 lm (520 lm*)

3 lm/W

3

10°

> 90

L70 > 50.000 h Ta 40°C

IP65

IK08

SINGLE FLOOD

LED 6W

9W

120 VAC, 50-60 Hz

On/Off • Consult factory for dimmable options

3000K • other colors on request

250 lm (520 lm*)

28 lm/W

3


45°

> 90

L70 > 50.000 h Ta 40°C


IP65

IK08



E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	18.12	0.49'
6.56'	4.55	0.98'
9.84'	2.04	1.48'
13.12'	1.11	1.97'
16.40'	0.74	2.46'

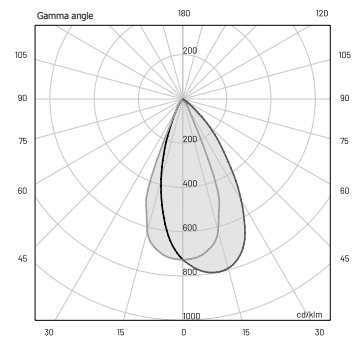

E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	37.16	2.62'
6.56'	9.29	5.25'
9.84'	4.09	7.87'
13.12'	2.32	10.50'
16.40'	1.49	13.12'

kubs

| 6W

DOUBLE SPOT • DOUBLE FLOOD • DOUBLE SPOT/FLOOD



TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Delivered lumens
*Lumens at source

Luminous efficacy

McADAM steps

Beam

CRI

Lifetime

IP rating

IK rating

DOUBLE SPOT

LED 6W

9W

120 VAC, 50-60 Hz

On/Off • Consult factory for dimmable options

3000K • other colors on request

30 lm (520 lm*)

3.5 lm/W

3

10° / 10°

> 90

L70 > 50.000 h Ta 40°C

IP65

IK08

DOUBLE FLOOD

LED 6W

9W

120 VAC, 50-60 Hz

On/Off • Consult factory for dimmable options

3000K • other colors on request

256 lm (520 lm*)

29 lm/W

3


45° / 45°

> 90

L70 > 50.000 h Ta 40°C


IP65

IK08



E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	2 x 9.85	0.49'
6.56'	2 x 2.42	0.98'
9.84'	2 x 1.11	1.48'
13.12'	2 x 0.65	1.97'
16.40'	2 x 0.37	2.46'

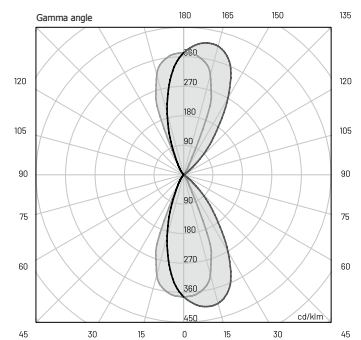


E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	2 x 19.05	2.62'
6.56'	2 x 4.74	5.25'
9.84'	2 x 2.14	7.87'
13.12'	2 x 1.21	10.50'
16.40'	2 x 0.74	13.12'


TECHNICAL
SPECIFICATIONS

	DOUBLE SPOT/FLOOD
Source lamp	LED 6W
Total wattage	9W
Voltage	120 VAC, 50-60 Hz
Control	On/Off • Consult factory for dimmable options
Light color	3000K • other colors on request
Delivered lumens *Lumens at source	143 lm (520 lm*)
Luminous efficacy	16 lm/W
McADAM steps	3
Beam	10° / 45°
CRI	> 90
Lifetime	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08



E (FC)		
H (ft)	fc (3000 K)	Ø (ft)
3.28'	19.05 / 9.85	2.62' / 0.49'
6.56'	4.74 / 2.42	5.25' / 0.98'
9.84'	2.14 / 1.11	7.87' / 1.48'
13.12'	1.21 / 0.65	10.50' / 1.97'
16.40'	0.74 / 0.37	13.12' / 2.46'



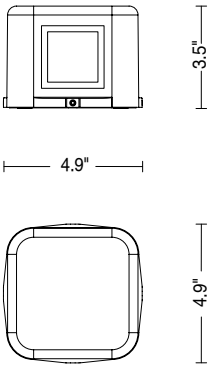

MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Extra clear PMMA
Finishing	Polyester powder paint

ORDER CODE

KU 3 0 PAR _ H B A Z _	
Finishing	L Graphite
	V Oxide
Beam	1 Double spot
	3 Double flood
	6 Double spot/flood
Example	KU 3 0 PAR 1 H B A Z L

