


design: R&D

# PILLAR

LAM32  
IDEASBECOMINGLIGHT

Luminaire designed for floor installation in urban or private areas. Suitable for power LED sources, it is composed of aluminum head submitted to anodizing treatment up to 18 microns. The pole in extruded aluminum is welded to the base plate along all the circumference of the luminaire. All parts are polyester powder coated to ensure durability over time and maximum resistance against atmospheric agents. PMMA Road optics. The closing screen made of in extra-clear transparent, tempered and screen-printed glass is integral to the body through a special glue-sealant used in shipbuilding. The protection degree IP66 is guaranteed by a special waterproof cable. Luminaire's installation is allowed thanks to screws for direct fixing to the floor or appropriate flush fixing counter-plate in steel sheet with anchor bolts for concrete planting. The power supply is 24VDC. Compartmented lamp with 11.81" long neoprene cable for connection to the supply line through appropriate waterproof connection systems to be ordered separately. Connection inside the pole.

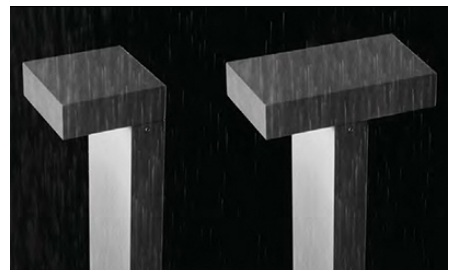

designplan 

79 Trenton Avenue  
Frenchtown, NJ 08825


[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042


# PILLAR



## TECHNICAL DRAWING



4.72" x 4.72" x H1.57"  
PILLAR MONO EMISSION



4.72" x 7.87" x H1.57"  
PILLAR BI EMISSION



## PILLAR

model	code	lamp	lumens	
			3000K	4000K
PILLAR MONO EMISSION	LM05.104210	LED 6W	751	789
PILLAR BI EMISSION	LM05.104380	LED 2x6W	1502	1577

## ACCESSORIES

### POLE



code	size
LM20.104259.US	4.72"x1.57"x H1 1.81"
LM20.104260.US	4.72"x1.57"x H23.62"
LM20.104261.US	4.72"x1.57"x H35.43"
LM20.104262.US	4.72"x1.57"x H47.24"

### ANCHOR PLATE




LM20.104264.US	4.72"x 7.87" x H5.12"
----------------	-----------------------

### EXAMPLE OF CODE COMPOSITION

### EXAMPLE OF POLE CODE COMPOSITION


Electronic driver xxx 50-60Hz integrated in the luminaire's body.  
Connection systems to be ordered as accessories.

LM05.104210.01.RD.BF



Light beam	
.RD	road
LED Color	
.BP	3000K
.BF	4000K

LM20.104259.11



## FINISH

color	code	color	code	color	code
	.01 / painted white		.02 / painted black		.03 / painted gray
	.04 / painted cor-ten		.11 / painted anthracite		

