



Pillar is an IP66-rated, square compact bollard for use in outdoor urban or private installations, that is extremely durable and able to withstand atmospheric agents over time. It is available with a single or double head in 2 color temperatures and 5 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	6W - Mono Emission (24VDC) 2 x 6W - Bi Emission (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Head: Aluminum (Anodized to 18 microns) Pole: Extruded Aluminum Lens: Extra-clear, Tempered, Screen-printed Glass Cable Length: 0.98'
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B0-U1-G0
<b>Delivered Lumens</b>	751 lm (Mono - 3000K) 1502 lm (Bi - 3000K)
<b>Efficacy</b>	125.2 lm/W (3000K)
<b>Optics</b>	Road
<b>Finishes</b>	5 Standard, See Below
<b>Fixture Dimensions</b>	4.72" l x 4.72" w x 1.57" h (Mono Head) 7.87" l x 4.72" w x 1.57" h (Bi Head) 4.72" l x 1.57" w x 11.81" h (Pole Heights) 4.72" l x 1.57" w x 23.62" h 4.72" l x 1.57" w x 35.43" h 4.72" l x 1.57" w x 47.24" h
<b>Color Consistency</b>	<3-Step MacAdam
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK10

Fixture Dimensions



## ORDERING INFORMATION

Example: LM05.104380.03.RD.BP.US. Accessories / Power Supplies ordered separately.

		RD		US
Model No.	Finish	Optic	CCT	
LM05.104210 - Mono	01 - White	RD - Road	BP - 3000K	US
LM05.104380 - Bi	02 - Black 03 - Gray 04 - Cor-ten 11 - Anthracite		BF - 4000K	

See Page 2 for Pole Accessories

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures	
			Mono	Bi
<a href="#">PPLT00149</a>	Non-Dim	120VAC to 24VDC, 10W, Class 2, IP65	1-1	—
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1	—
<a href="#">PPLT00056</a>	Non-Dim	120V-277AC to 24VDC, 26W, Class 2, IP66	1-3	1-1
<a href="#">PPLT00155</a>	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-4	1-2
<a href="#">PPLT00157</a>	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-8	1-4
<a href="#">PPLT00599</a>	ELV/TRIAC & 0-10V Dimming (100-0%)	120-277VAC to 24VDC, 96W, Class 2	1-12	1-6
<a href="#">PPLT00158</a>	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-13	1-6
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-13	1-6

For other power supply options consult factory.

## ACCESSORIES - Installation



### Pole

**LM20.104259** (4.72" x 1.57" x 11.81" h)

**LM20.104260** (4.72" x 1.57" x 23.62" h)

**LM20.104261** (4.72" x 1.57" x 35.43" h)

**LM20.104262** (4.72" x 1.57" x 47.24" h)




### Anchor Plate

**LM20.104264** (4.72" x 7.87" x 5.12" h)

## PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 199.95

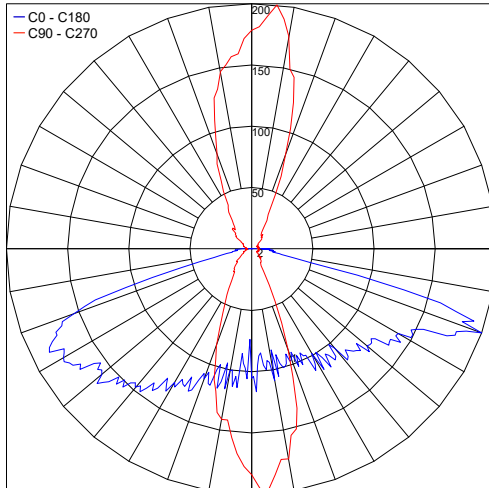

PHOTOMETRIC FILENAME : PILLAR 3000K LM05.104210.XX.RD.XX.IES

Job Name/Date:

Fixture Type Designation: