



Pillar is an IP66-rated, square compact bollard for use in outdoor urban or private installations, that is extremely durable and able to withstand atmospheric agents over time. It is available with a single or double head in 2 color temperatures and 5 standard finishes. Dark Sky compliant for output below 80°.



## TECHNICAL DATA

<b>Wattage / Input</b>	6W - Mono Emission 2 x 6W - Bi Emission
<b>Power Supply</b>	Remote, not included. Consult Factory.
<b>Construction</b>	Head: Aluminum (Anodized to 18 microns) Pole: Extruded Aluminum Lens: Extra-clear, Tempered, Screen-printed Glass Cable Length: 0.98'
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B0-U1-G0
<b>Delivered Lumens</b>	751 lm (Mono - 3000K) 1502 lm (Bi - 3000K) Dark Sky compliant, output below 80°
<b>Efficacy</b>	125.2 lm/W (3000K)
<b>Optics</b>	Road
<b>Finishes</b>	5 Standard, See Below
<b>Fixture Dimensions</b>	4.72" l x 4.72" w x 1.57" h (Mono Head) 7.87" l x 4.72" w x 1.57" h (Bi Head) 4.72" l x 1.57" w x 11.81" h (Pole Heights) 4.72" l x 1.57" w x 23.62" h 4.72" l x 1.57" w x 35.43" h 4.72" l x 1.57" w x 47.24" h
<b>Color Consistency</b>	<3-Step MacAdam
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK10

Fixture Dimensions



## ORDERING INFORMATION

Example: LM05.104380.03.RD.BP.US. Accessories / Power Supplies ordered separately.

.  . RD .  . US

Model No.	Finish	Optic	CCT	
LM05.104210 - Mono	01 - White	RD - Road	BP - 3000K	US
LM05.104380 - Bi	02 - Black		BF - 4000K	
	03 - Gray			
	04 - Cor-ten			
	11 - Anthracite			

See Page 2 for Pole Accessories

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

Consult Factory

## ACCESSORIES - Installation



### Pole

**LM20.104259** (4.72" x 1.57" x 11.81" h)

**LM20.104260** (4.72" x 1.57" x 23.62" h)

**LM20.104261** (4.72" x 1.57" x 35.43" h)

**LM20.104262** (4.72" x 1.57" x 47.24" h)




### Anchor Plate

**LM20.104264** (4.72" x 7.87" x 5.12" h)

## PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 199.95

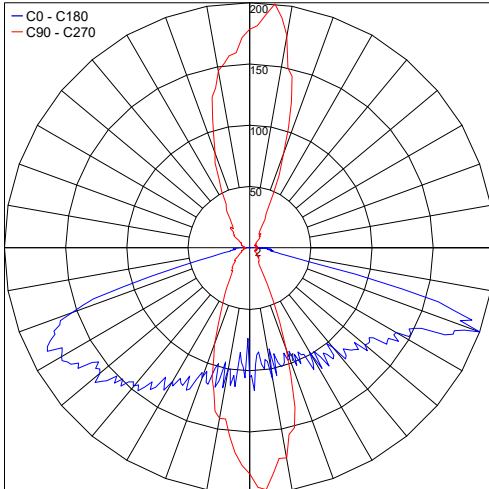

PHOTOMETRIC FILENAME : PILLAR 3000K LM05.104210.XX.RD.XX.IES

Job Name/Date:

Fixture Type Designation: