



Pillar is an IP66-rated, square compact bollard for use in outdoor urban or private installations, that is extremely durable and able to withstand atmospheric agents over time. It is available with a single or double head in 2 color temperatures and 5 standard finishes. Dark Sky compliant for output below 80°.



TECHNICAL DATA

Wattage / Input	6W - Mono Emission 2 x 6W - Bi Emission
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Head: Aluminum (Anodized to 18 microns) Pole: Extruded Aluminum Lens: Extra-clear, Tempered, Screen-printed Glass Cable Length: 0.98'
CCT	3000K, 4000K
BUG Rating	B0-U1-G0
Delivered Lumens	751 lm (Mono - 3000K) 1502 lm (Bi - 3000K) Dark Sky compliant, output below 80°
Efficacy	125.2 lm/W (3000K)
Optics	Road
Finishes	5 Standard, See Below
Fixture Dimensions	4.72" l x 4.72" w x 1.57" h (Mono Head) 7.87" l x 4.72" w x 1.57" h (Bi Head) 4.72" l x 1.57" w x 11.81" h (Pole Heights) 4.72" l x 1.57" w x 23.62" h 4.72" l x 1.57" w x 35.43" h 4.72" l x 1.57" w x 47.24" h
Color Consistency	<3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK10

Fixture Dimensions



ORDERING INFORMATION

Example: LM05.104380.03.RD.BP.US. Accessories / Power Supplies ordered separately.

	.		.	RD	.		.	US
--	---	--	---	----	---	--	---	----

Model No.	Finish	Optic	CCT	
LM05.104210 - Mono	01 - White	RD - Road	BP - 3000K	US
LM05.104380 - Bi	02 - Black		BF - 4000K	
	03 - Gray			
	04 - Cor-ten			
	11 - Anthracite			

See Page 2 for Pole Accessories

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures	
			Mono	Bi
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-13	1-6

SUGGESTED POWER SUPPLIES

Remote 24VDC Driver in NEMA Enclosure - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures	
			Mono	Bi
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-12	1-6

For other power supply options consult factory.

ACCESSORIES - Installation



Pole

LM20.104259 (4.72" x 1.57" x 11.81" h)

LM20.104260 (4.72" x 1.57" x 23.62" h)

LM20.104261 (4.72" x 1.57" x 35.43" h)

LM20.104262 (4.72" x 1.57" x 47.24" h)



Anchor Plate

LM20.104264 (4.72" x 7.87" x 5.12" h)


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 199.95

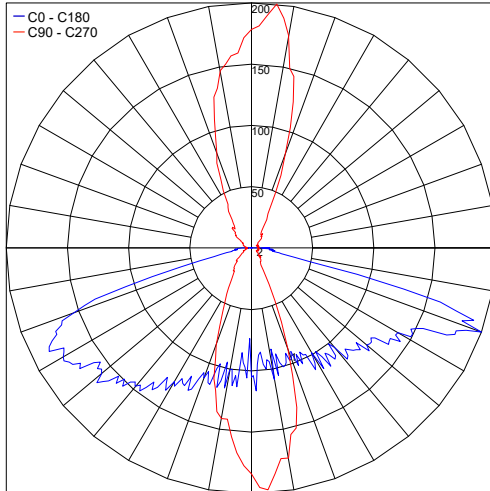

PHOTOMETRIC FILENAME : PILLAR 3000K LM05.104210.XX.RD.XX.IES

Job Name/Date:

Fixture Type Designation: