



Pillar is an IP66-rated, square compact bollard for use in outdoor urban or private installations, that is extremely durable and able to withstand atmospheric agents over time. It is available with a single or double head in 2 color temperatures and 5 standard finishes. Dark Sky compliant.



## TECHNICAL DATA

|                           |                                                                                                                                                                                                                                 |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Wattage / Input</b>    | 6W - Mono Emission<br>2 x 6W - Bi Emission                                                                                                                                                                                      |
| <b>Power Supply</b>       | Remote 24VDC, not included. See page 2.                                                                                                                                                                                         |
| <b>Construction</b>       | Head: Aluminum (Anodized to 18 microns)<br>Pole: Extruded Aluminum<br>Lens: Extra-clear, Tempered, Screen-printed Glass<br>Cable Length: 0.98'                                                                                  |
| <b>CCT</b>                | 3000K, 4000K                                                                                                                                                                                                                    |
| <b>BUG Rating</b>         | B0-U1-G0                                                                                                                                                                                                                        |
| <b>Delivered Lumens</b>   | 751 lm (Mono - 3000K)<br>1502 lm (Bi - 3000K)<br>Dark Sky compliant                                                                                                                                                             |
| <b>Efficacy</b>           | 125.2 lm/W (3000K)                                                                                                                                                                                                              |
| <b>Optics</b>             | Road                                                                                                                                                                                                                            |
| <b>Finishes</b>           | 5 Standard, See Below                                                                                                                                                                                                           |
| <b>Fixture Dimensions</b> | 4.72" l x 4.72" w x 1.57" h (Mono Head)<br>7.87" l x 4.72" w x 1.57" h (Bi Head)<br>4.72" l x 1.57" w x 11.81" h (Pole Heights)<br>4.72" l x 1.57" w x 23.62" h<br>4.72" l x 1.57" w x 35.43" h<br>4.72" l x 1.57" w x 47.24" h |
| <b>Color Consistency</b>  | <3-Step MacAdam                                                                                                                                                                                                                 |
| <b>IP Rating</b>          | IP66                                                                                                                                                                                                                            |
| <b>Impact Resistance</b>  | IK10                                                                                                                                                                                                                            |

Fixture Dimensions



## ORDERING INFORMATION

Example: LM05.104380.03.RD.BP.US. Accessories / Power Supplies ordered separately.

|  |   |  |   |    |   |  |   |    |
|--|---|--|---|----|---|--|---|----|
|  | . |  | . | RD | . |  | . | US |
|--|---|--|---|----|---|--|---|----|

| Model No.          | Finish          | Optic     | CCT        |    |
|--------------------|-----------------|-----------|------------|----|
| LM05.104210 - Mono | 01 - White      | RD - Road | BP - 3000K | US |
| LM05.104380 - Bi   | 02 - Black      |           | BF - 4000K |    |
|                    | 03 - Gray       |           |            |    |
|                    | 04 - Cor-ten    |           |            |    |
|                    | 11 - Anthracite |           |            |    |

See Page 2 for Pole Accessories

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

24VDC

| Part Number               | Description | Input/Output                             | # of Fixtures |     |
|---------------------------|-------------|------------------------------------------|---------------|-----|
|                           |             |                                          | Mono          | Bi  |
| <a href="#">PPLT00284</a> | Non-Dim     | 120-277VAC to 24VDC, 100W, Class 2, DAMP | 1-13          | 1-6 |

**SUGGESTED POWER SUPPLIES**

Remote 24VDC Driver in NEMA Enclosure - ELV / TRIAC / 0-10V



PPLT00715

| Part Number               | Description                         | Input/Output                                | # of Fixtures |     |
|---------------------------|-------------------------------------|---------------------------------------------|---------------|-----|
|                           |                                     |                                             | Mono          | Bi  |
| <a href="#">PPLT00715</a> | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-12          | 1-6 |

*For other power supply options consult factory.***ACCESSORIES - Installation****Pole****LM20.104259** (4.72" x 1.57" x 11.81" h)**LM20.104260** (4.72" x 1.57" x 23.62" h)**LM20.104261** (4.72" x 1.57" x 35.43" h)**LM20.104262** (4.72" x 1.57" x 47.24" h)**Anchor Plate****LM20.104264** (4.72" x 7.87" x 5.12" h)


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA

*Note: All photometric data is 3000K*

Maximum Candela = 199.95

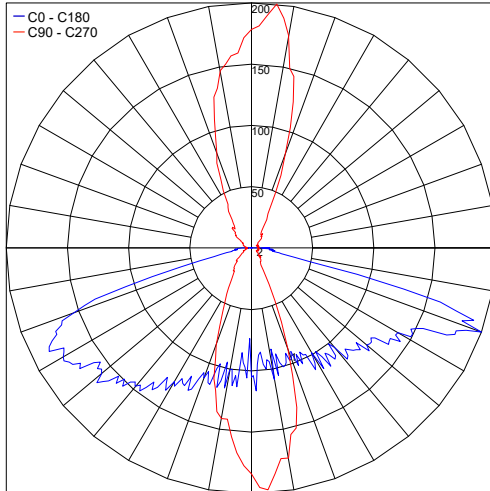

PHOTOMETRIC FILENAME : PILLAR 3000K LM05.104210.XX.RD.XX.IES

Job Name/Date:

Fixture Type Designation: