


PLANK W

Plank W is a wall mounted minimalist lighting solution that offers linear spread upper and diffused lower light emissions. It comes in 30, 36 and 48-inch lengths and is available in 4 color temperatures and 4 wooden side panel options. Set screws on the side of the driver housing allows the fixture to pivot up for access to the driver. ADA compliant.



MADE IN THE U.S.A.
ADA COMPLIANT

Fixture Dimensions - See page 2.

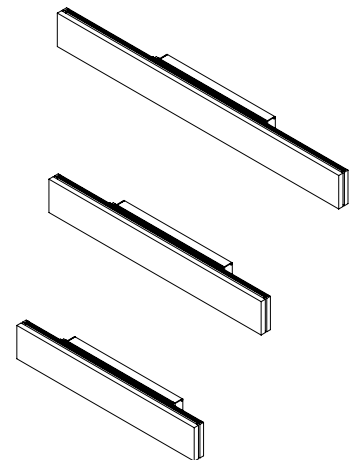

TECHNICAL DATA

Wattage / Input	45W, 54W, 72W (120-277VAC)
Power Supply	Integral (0-10V Dimming)
Construction	Body: Extruded Aluminum Side Panel: Wood - available white oak, maple, cherry or walnut.
CCT	2700K, 3000K, 3500K, 4000K
CRI	>90
Delivered Lumens	Up - 1848 lm, Down - 1866 lm (4 ft, 3000K)
Efficacy	Up: 25.6 lm/W, Down: 25.9 lm/W
Optics	Up: Linear Spread, Down: Diffuse
Finishes	Black Suede
Wood Finishes	White Oak, Maple, Cherry, Walnut
Fixture Dimensions	See page 2.
LED Source	Mid-Power LEDs
IP Rating	IP20

MOUNTING SCREWS BY OTHERS

ORDERING INFORMATION




Example: PW90-L-3-01-30-02-M-C-SC-0.

PW90-L	-		-	01	-		-	02	-		-	C	-	SC	-	
Model #	Length	Configuration	CCT	Finish	Wood	Driver	Mounting	Options								
PW90-L	2 - 2.5' 3 - 3.0' 4 - 4.0'	01 - Up & Down Dim Together	27 - 27K 30 - 30K 35 - 35K 40 - 40K	02 - Black Suede	O - Wh. Oak M - Maple C - Cherry W - Walnut	C - 120-277VAC, 0-10V Dimming	SC - Surface	0 - None 1 - Emergency								

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

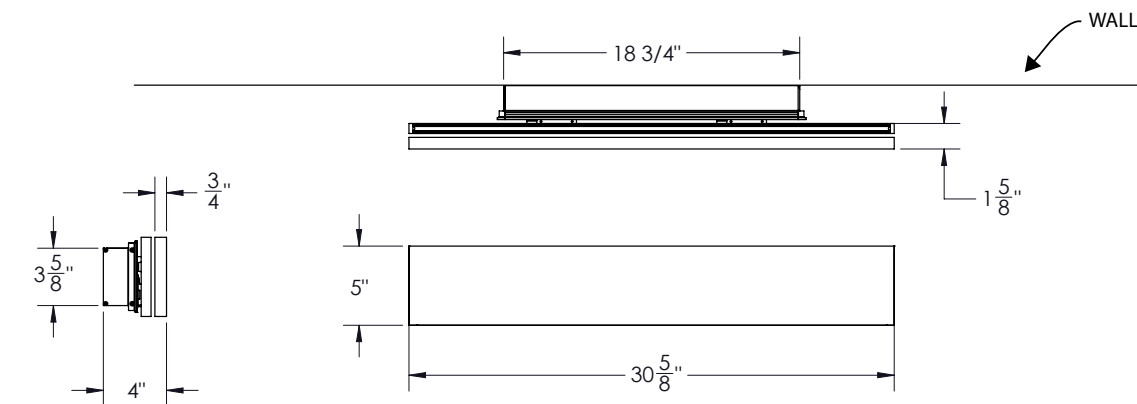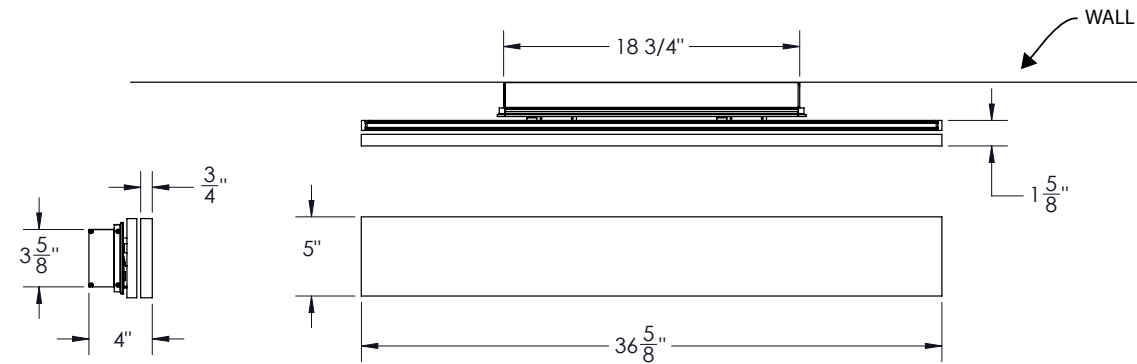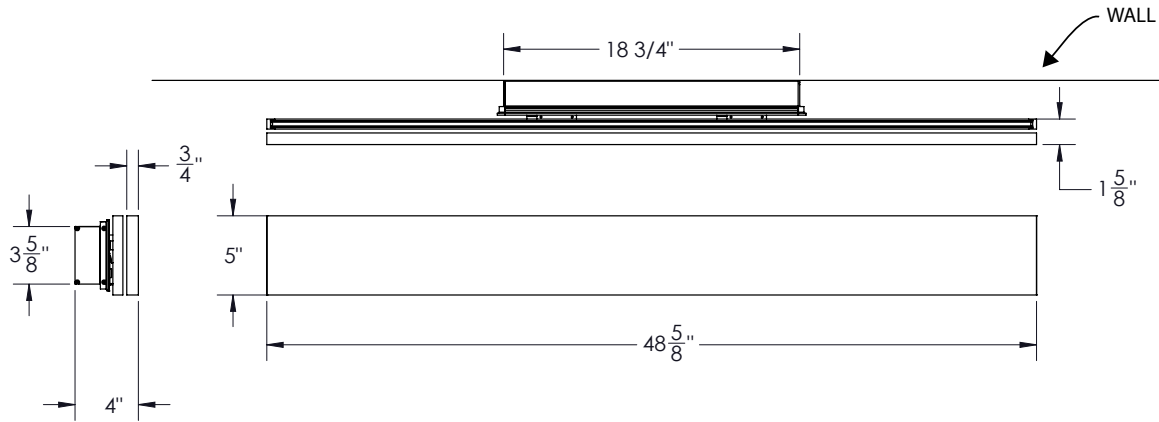


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 913

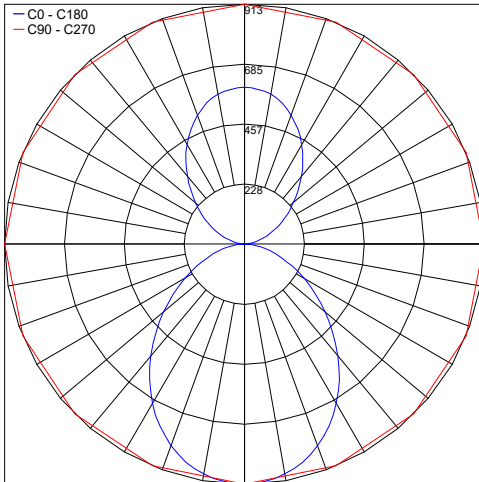

Job Name/Date:

Fixture Type Designation: