

# D700.MINI-CR


D700.MINI-CR is a small LED downlight with a minimalist look and Tru-Colour® 7 year warranty. They are suitable for indoor installation including bathrooms and spas, and designed to be low glare.



## TECHNICAL DATA

<b>Wattage / Input</b>	9.6W (250mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Aluminum
<b>CCT</b>	2700K, 3000K, 4000K, 5000K
<b>CRI</b>	98 (Tru-Colour®)
<b>Delivered Lumens</b>	800 lm (°, 3000K)
<b>Efficacy</b>	83.3 lm/W (°, 3000K)
<b>Optics</b>	15°, 24°, 36°
<b>Finishes</b>	Black, White
<b>Lumen Maintenance</b>	70,000 hrs L70, B10 (Ta 25°C)
<b>Operating Temp.</b>	-4°F to 140°F
<b>Color Consistency</b>	2-Step MacAdam
<b>Fixture Dimensions</b>	Ø1.7" x 3.9"
<b>Cut-out Dimension</b>	Ø1.6"
<b>Aperature</b>	Ø1.7"
<b>IP Rating</b>	IP44
<b>Warranty</b>	7 years

Fixture Dimensions

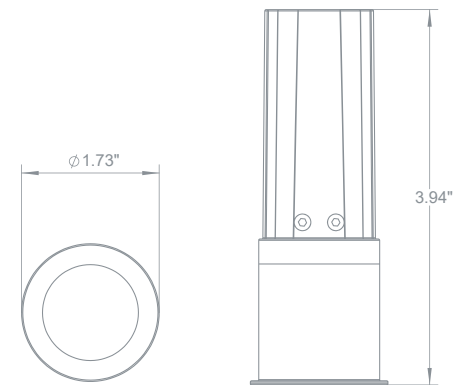

Tru-Colour® lights score a 98 on the color rendering index (CRI) which is the top rating for high CRI LEDs. Tru-Colour LEDs contain about a billion colours, which is more than any other white LED on the market. All these colors in one small LED means that you see colors as they really are. Tru-Colour has TM-30 color fidelity and the purest red on the market - Rf CES07 (R9 on the old CRI scale).

## ORDERING INFORMATION

Example: D700.MINI-CR-3K-36-BO-WI-0-10V.US. Accessories / Power Supplies ordered separately.

D700.MINI	-	CR	-		-		-		-	0-10V	-	.US
Model No.		CCT	Optics	Outer Finish	Inner Finish	Power						
D700.MINI	CR - Curve	2.7K - 2700K 3K - 3000K 4K - 4000K 5K - 5000K	15 - 15° 24 - 24° 36 - 36°	BO - Black WO - White	BI - Black WI - White	0-10V - 0-10V Remote Driver					.US	

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

250mA


Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00290</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 250mA, 16W, Class 2	1-1
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 250mA, 30W, Class 2	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 250mA, 50W, Class 2	1-1

For other power supply options consult factory.

## PHOTOMETRIC DATA

All photometry is 3000K

Maximum Candela = 1951

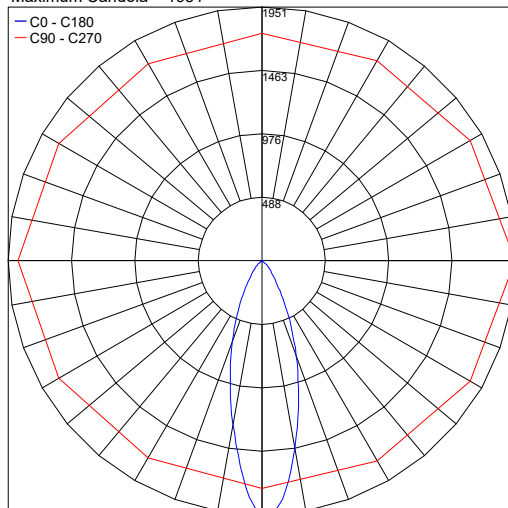

PHOTOMETRIC FILENAME : D700.MINI-CR-3K-36\_IES.IES

Job Name/Date:

Fixture Type Designation: