

The Ring Mini is an outdoor floodlight suitable for installation on a façade or wall, with 355° swivel base and horizontal adjustment of +90° / -40°. It comes in 3 standard finishes and 3 optics options.




Base Plate Included with Fixture

TECHNICAL DATA

Wattage / Input	10W (120VAC)
Power Supply	Integral
Construction	Body: Die-Cast Copper-Free Aluminum Screws: Stainless Steel Lens: Tempered, Safety Glass
CCT	3000K, 4000K
CRI	>80
Delivered Lumens	1060 lm (3000K, 35°)
Efficacy	106 lm/W (3000K, 35°)
Optics	3 Standard (see below)
Finishes	3 Standard, Custom RAL (see below)
Fixture Dimensions	Ø3.15" x 4.72" w x 7.24" h
Fixture Weight	3.31 lbs
LED Source	1 COB CREE "CXB 1310" LED
IP Rating	IP66
Impact Rating	IK08

Fixture Dimensions



ORDERING INFORMATION

Example: 101401P-30K-35-TG. Accessories ordered separately.

101401P	-		-		-	
Model No.	CCT	Optics	Finish			
101401P	30K - 3000K	14 - 14°	TG - Textured Grey (RAL 9006)			
	40K - 4000K	35 - 35°	AG - Anthracite Grey (RAL 7016)			
		55 - 55°	MB - Matte Black (on request)			

Job Name/Date:

Fixture Type Designation:


ACCESSORIES

Installation



AC044
Ground Spike

Anti-Glare



AC048
Honeycomb Louvrer



AC038
Tree Strap
for Ring Series



AC045
Anti-glare visor


ACCESSORIES - Optional



AC085
Pole Plate


PHOTOMETRIC DATA

Maximum Candela = 11206.8

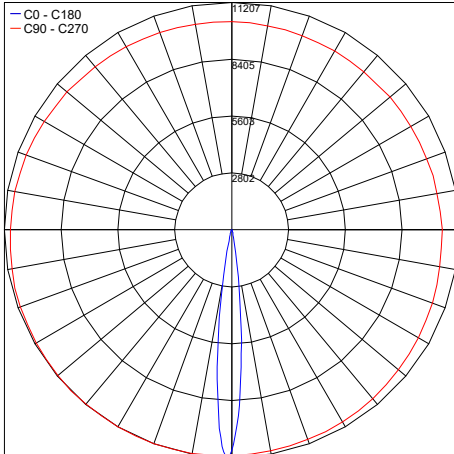


14°

Maximum Candela = 723.8

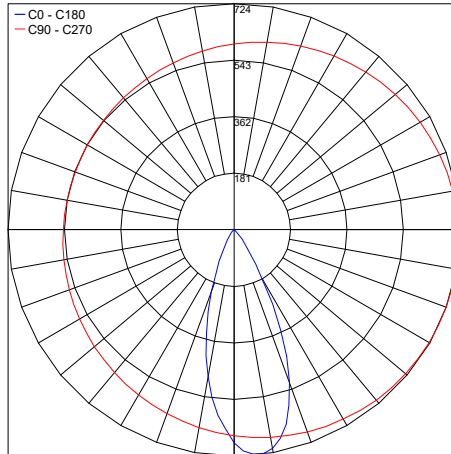

35°

Maximum Candela = 634.1

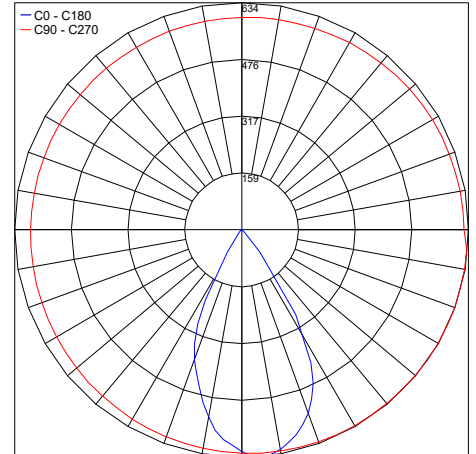

55°

Job Name/Date:

Fixture Type Designation: