


SMALL IP20

Small IP20 is an indoor recessed wall mounted fixture made of CALCYT® plaster and the little brother of the original Normall. It can be used as an uplight or downlight with a curved back to create a great indirect lighting experience. It is available in 4 white color temperatures and a warm to dim version.



Ceiling Cut-Out: 4.88" x 14.37"
Fixture Dimensions

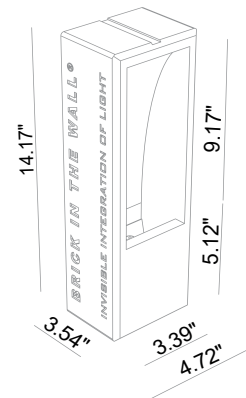

TECHNICAL DATA

Wattage / Input	6W (WarmDim - 350mA), 9.1W (350mA), 6.4W (250mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® Plaster Lens: Tempered Glass
CCT	2200K, 2700K, 3000K, 4000K, WarmDim
CRI	>90 and >95
Delivered Lumens	331 lm (6.4W, 3000K) 236 lm (WarmDim)
Efficacy	51 lm/W (6.4W, 3000K) 38 lm/W (WarmDim)
Optics	Fixed
Finishes	CALCYT® Plaster - fully paintable
Fixture Dimensions	4.72" w x 14.17" h x 3.54" l
Cut-out Dimension	4.88" x 14.37"
Aperature	3.39" w x 9.17" h
Color Consistency	2-Step MacAdam 4-Step MacAdam (WarmDim)
IP Rating	IP20

ORDERING INFORMATION

Example: 106 27 000. Accessories / Power Supplies ordered separately.

Model No.	Description
106 27 000 - 2700K	9.1W, 1000 lm, 350mA, CRI 90, IP20 Indoor
106 27 100 - 3000K	9.1W, 1000 lm, 350mA, CRI 90, IP20 Indoor
106 27 200 - 4000K	9.1W, 1000 lm, 350mA, CRI 90, IP20 Indoor
106 29 500 - 2200K	6.4W, 600 lm, 250mA, CRI 90, IP20 Indoor
106 29 000 - 2700K	6.4W, 600 lm, 250mA, CRI 90, IP20 Indoor
106 29 100 - 3000K	6.4W, 600 lm, 250mA, CRI 90, IP20 Indoor
106 29 600 - WarmDim	6W, 500 lm, 350mA, CRI 95, IP20 Indoor

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA - 9.1W version (1000 lm) or 6W version (500 lm)

Part Number	Description	Input/Output	# of Fixtures	
			6W	9.1W
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-2	1-2
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-2	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-2	1-2

Suggested Lutron Compatible 350mA - 9.1W version (1000 lm) or 6W version (500 lm)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

SUGGESTED POWER SUPPLIES

250mA - 6.4W version (600 lm)

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2	1-1
PPLT00290	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 250mA, 16W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 20W, Class 2	1-2
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 50W, Class 2	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 100W, Class 2	1-2


For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

REQUIRED ACCESSORIES

Installation

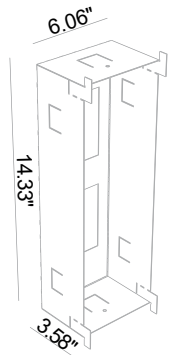


706 01 000
Outer Casing
Housing: perforated aluminum

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 255.7

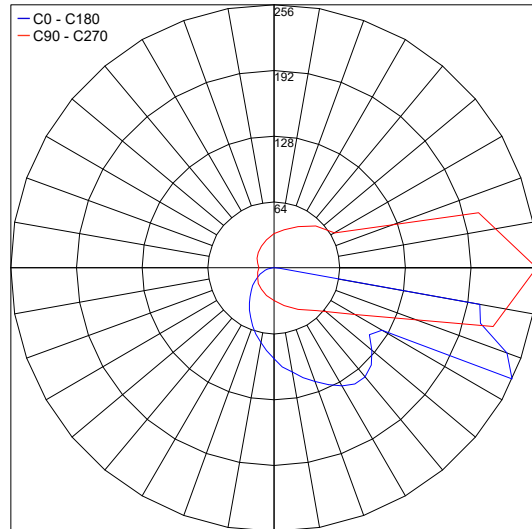

Warm to Dim

Maximum Candela = 186.5

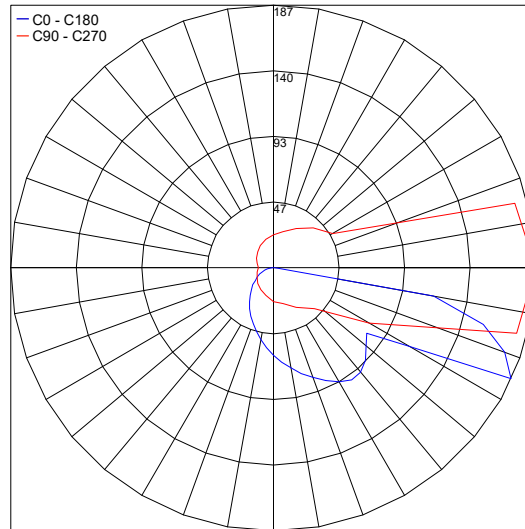

Job Name/Date:

Fixture Type Designation: