


SUSPENDED FOR INDOOR APPLICATIONS DOUBLE BEAM FOR RETAIL, HOSPITALITY, OFFICES AND PRIVATE HOMES



2700K 3000K 4000K

24.41"

46.46"

68.50"

CONVEX COVER



BERICA S 1.0
14W 120-277VAC
ON/OFF, DALI+PUSH



BERICA S 1.1
28W 120-277VAC
ON/OFF, DALI+PUSH



BERICA S 1.2
39W 120-277VAC
ON/OFF, DALI+PUSH

FLAT COVER



BERICA S 2.0
14W 120-277VAC
ON/OFF, DALI+PUSH



BERICA S 2.1
28W 120-277VAC
ON/OFF, DALI+PUSH



BERICA S 2.2
39W 120-277VAC
ON/OFF, DALI+PUSH

CONCAVE COVER



BERICA S 3.0
14W 120-277VAC
ON/OFF, DALI+PUSH



BERICA S 3.1
28W 120-277VAC
ON/OFF, DALI+PUSH



BERICA S 3.2
39W 120-277VAC
ON/OFF, DALI+PUSH

INDOOR WALL MOUNTED


BERICA IN

OUTDOOR WALL MOUNTED


BERICA OUT




^
BERICA S 2.0
3000K, 14W, 58°x99°, antique bronze

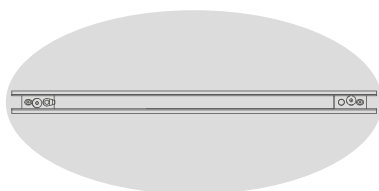

44°x90° optics

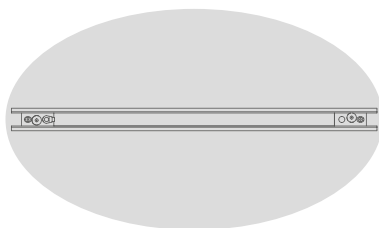

58°x99° optics

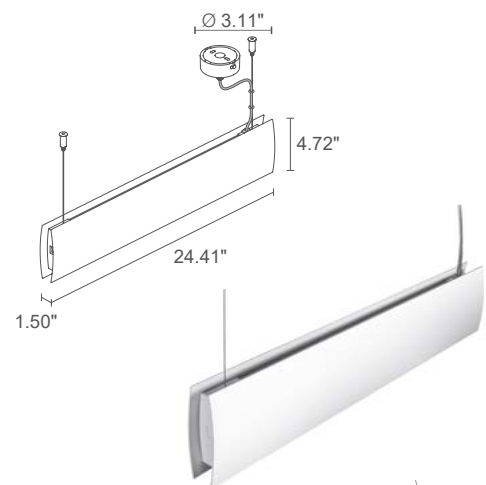

BERICA S 1.0


LED TECH   4.41 lbs IP40 DALI PUSH 

POWER / MODEL CODE	14W 120-277VAC
BS10101  00  D  B	White
BS10101  00  D  6	Antique white
BS10101  00  D  Z	Antique bronze
BS10101  00  D  K	Matt aluminum grey
BS10101  00  D  8	Primer


CONTROL SYSTEM	0 - on/off D - DALI+PUSH
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
LOWER OPTICS	L - 44°x90° K - 58°x99° D - diffuse
UPPER OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	1647 lm (3000K)
DELIVERED LUMEN OUTPUT	1159 lm (3000K, 44°x90°+ diffuse)
NO. AND TYPE OF LED	84 mid-power LEDs 3-step MacAdam, 60 000h L90 B10 (Ta 25°C)
MATERIAL	body and cover in anticorodal aluminum canopy in steel
POWER SUPPLY UNIT	built in
POWER CABLES	on/off: includes 8.2 ft PVC + PVC cable 2x0.75 Ø 0.21 in DALI: includes 8.2 ft PVC + PVC cable 5x0.75 Ø 0.26 in
MOUNTING	surface mounted (ceiling) with canopy
FEATURES	CRI >90
NOTES	indoor wall-mounted version: Berica IN 1, outdoor wall-mounted version: Berica OUT 1, non-standard lengths available on request single-beam version available on request Casambi-compatible version, controllable with the Casambi app, available on request



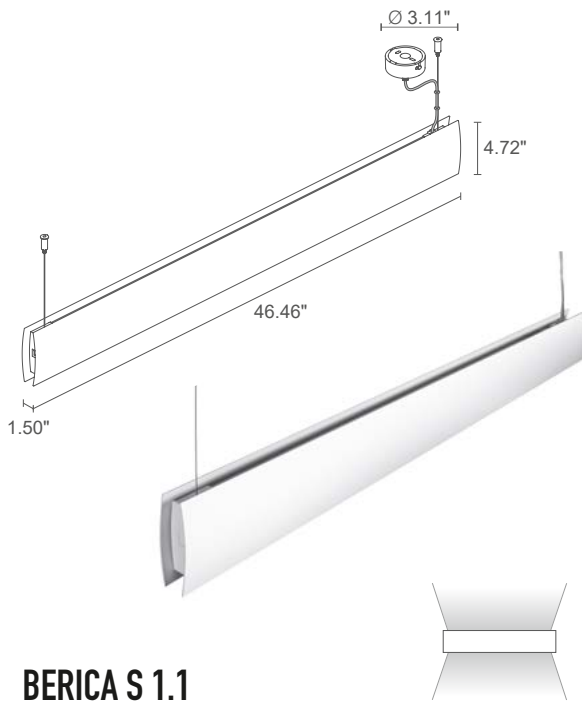

BERICA S 1.1



28W 120-277VAC

BS11101 ■ **00** ■ **D** ■ **B** White
BS11101 ■ **00** ■ **D** ■ **6** Antique white
BS11101 ■ **00** ■ **D** ■ **Z** Antique bronze
BS11101 ■ **00** ■ **D** ■ **K** Matt aluminum grey
BS11101 ■ **00** ■ **D** ■ **8** Primer

■ **O** - on/off
D - DALI+PUSH

■ **F** - 2700K
5 - 3000K
9 - 4000K

■ **L** - 44°x90°
K - 58°x99°
D - diffuse

diffuse

3312 lm (3000K)

2320 lm (3000K, 44°x90°+ diffuse)

180 mid-power LEDs
 3-step MacAdam, 60000h L90 B10 (Ta 25°C)

body and cover in anticorodal aluminum
 canopy in steel


built in

on/off: includes 8.2 ft PVC + PVC cable
 2x0.75 Ø0.21 in
 DALI: includes 8.2 ft PVC + PVC cable
 5x0.75 Ø0.26 in


surface mounted (ceiling) with canopy

CRI >90

indoor wall-mounted version: Berica IN 1, outdoor
 wall-mounted version: Berica OUT 1, non-standard
 lengths available on request
 single-beam version available on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request

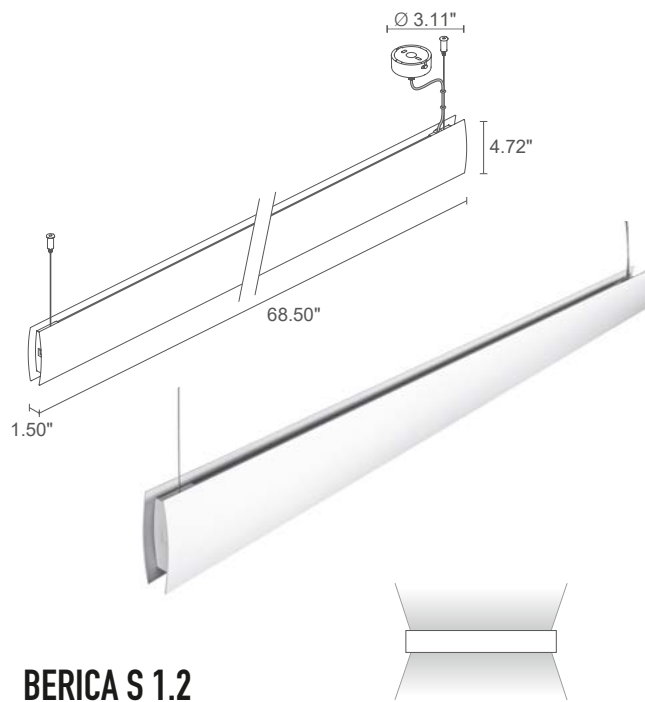

BERICA S 1.2



39W 120-277VAC

BS12101 ■ **00** ■ **D** ■ **B** White
BS12101 ■ **00** ■ **D** ■ **6** Antique white
BS12101 ■ **00** ■ **D** ■ **Z** Antique bronze
BS12101 ■ **00** ■ **D** ■ **K** Matt aluminum grey
BS12101 ■ **00** ■ **D** ■ **8** Primer

■ **O** - on/off
D - DALI+PUSH

■ **F** - 2700K
5 - 3000K
9 - 4000K

■ **L** - 44°x90°
K - 58°x99°
D - diffuse

diffuse

4747 lm (3000K)

3333 lm (3000K, 44°x90°+ diffuse)

270 mid-power LEDs
 3-step MacAdam, 60000h L90 B10 (Ta 25°C)

body and cover in anticorodal aluminum
 canopy in steel


built in

on/off: includes 8.2 ft PVC + PVC cable
 2x0.75 Ø0.21 in
 DALI: includes 8.2 ft PVC + PVC cable
 5x0.75 Ø0.26 in

surface mounted (ceiling) with canopy


CRI >90

indoor wall-mounted version: Berica IN 1, outdoor
 wall-mounted version: Berica OUT 1, non-standard
 lengths available on request
 single-beam version available on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request





^
BERICA S 2.0
antique bronze

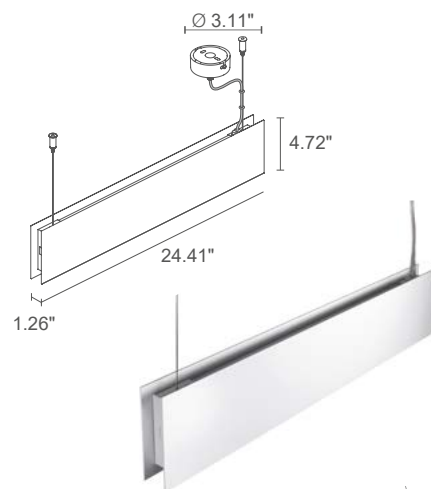


BERICA S 2.0

LED TECH 4.41 lbs IP40 DALI PUSH



44°x90° optics

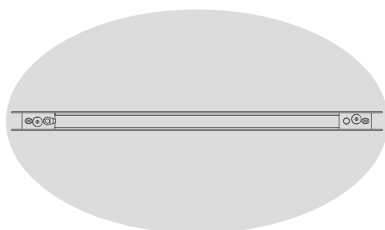


58°x99° optics

POWER / MODEL CODE 14W 120-277VAC
BS20101 **00** **D** **B** White
BS20101 **00** **D** **6** Antique white
BS20101 **00** **D** **Z** Antique bronze
BS20101 **00** **D** **K** Matt aluminum grey
BS20101 **00** **D** **8** Primer


CONTROL SYSTEM	0 - on/off D - DALI+PUSH
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
LOWER OPTICS	L - 44°x90° K - 58°x99° D - diffuse
UPPER OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	1647 lm (3000K)
DELIVERED LUMEN OUTPUT	1325 lm (3000K, 44°x90°+ diffuse)
NO. AND TYPE OF LED	84 mid-power LEDs 3-step MacAdam, 60000h L90 B10 (Ta 25°C)
MATERIAL	body and cover in anticorodal aluminum canopy in steel
POWER SUPPLY UNIT	built in
POWER CABLES	on/off: includes 8.2 ft PVC + PVC cable 2x0.75 Ø0.21 in DALI: includes 8.2 ft PVC + PVC cable 5x0.75 Ø0.26 in
MOUNTING	surface mounted (ceiling) with canopy
FEATURES	CRI >90
NOTES	indoor wall-mounted version: Berica IN 2, outdoor wall-mounted version: Berica OUT 2, non-standard lengths available on request single-beam version available on request Casambi-compatible version, controllable with the Casambi app, available on request



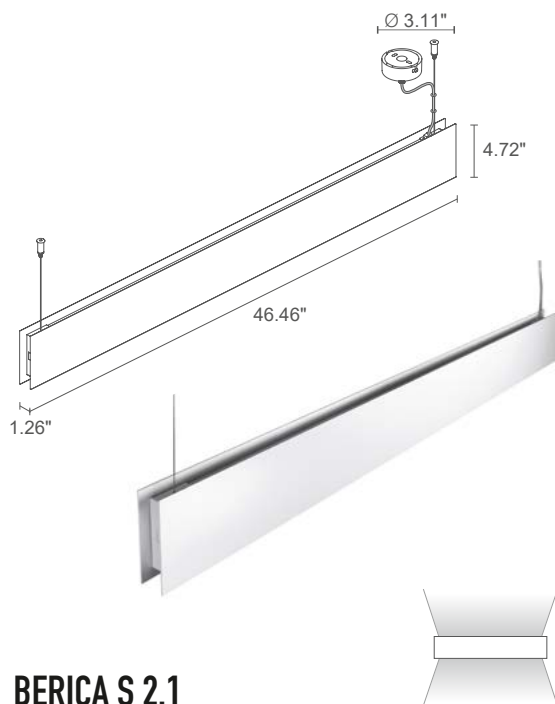

BERICA S 2.1



28W 120-277VAC

BS21101 ■ **00** ■ **D** ■ **B** White
BS21101 ■ **00** ■ **D** ■ **6** Antique white
BS21101 ■ **00** ■ **D** ■ **Z** Antique bronze
BS21101 ■ **00** ■ **D** ■ **K** Matt aluminum grey
BS21101 ■ **00** ■ **D** ■ **8** Primer

■	O - on/off D - DALI+PUSH
■	F - 2700K 5 - 3000K 9 - 4000K
■	L - 44°x90° K - 58°x99° D - diffuse
diffuse	

3312 lm (3000K)

2653 lm (3000K, 44°x90°+ diffuse)

180 mid-power LEDs
 3-step MacAdam, 60000h L90 B10 (Ta 25°C)

body and cover in anticorodal aluminum
 canopy in steel


built in

on/off: includes 8.2 ft PVC + PVC cable
 2x0.75 Ø0.21 in
 DALI: includes 8.2 ft PVC + PVC cable
 5x0.75 Ø0.26 in


surface mounted (ceiling) with canopy

CRI >90

indoor wall-mounted version: Berica IN 2, outdoor
 wall-mounted version: Berica OUT 2, non-standard
 lengths available on request
 single-beam version available on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request

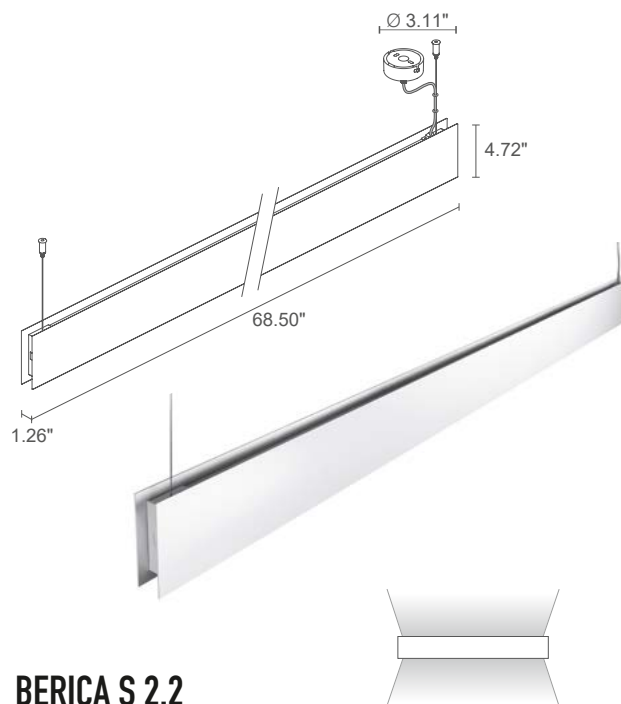

BERICA S 2.2



39W 120-277VAC

BS22101 ■ **00** ■ **D** ■ **B** White
BS22101 ■ **00** ■ **D** ■ **6** Antique white
BS22101 ■ **00** ■ **D** ■ **Z** Antique bronze
BS22101 ■ **00** ■ **D** ■ **K** Matt aluminum grey
BS22101 ■ **00** ■ **D** ■ **8** Primer

■	O - on/off D - DALI+PUSH
■	F - 2700K 5 - 3000K 9 - 4000K
■	L - 44°x90° K - 58°x99° D - diffuse
diffuse	

4747 lm (3000K)

3800 lm (3000K, 44°x90°+ diffuse)

270 mid-power LEDs
 3-step MacAdam, 60000h L90 B10 (Ta 25°C)

body and cover in anticorodal aluminum
 canopy in steel


built in


on/off: includes 8.2 ft PVC + PVC cable
 2x0.75 Ø0.21 in
 DALI: includes 8.2 ft PVC + PVC cable
 5x0.75 Ø0.26 in

surface mounted (ceiling) with canopy


CRI >90

indoor wall-mounted version: Berica IN 2, outdoor
 wall-mounted version: Berica OUT 2, non-standard
 lengths available on request
 single-beam version available on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request



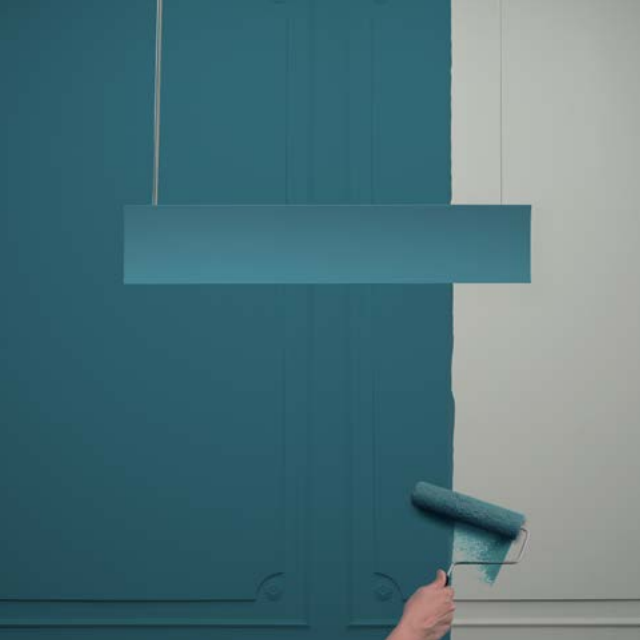


^
BERICA S 3.0
painted primer version

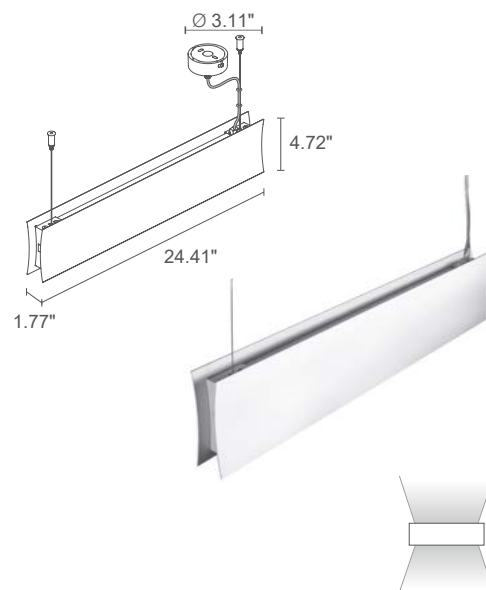


BERICA S 3.0

LED TECH 4.41 lbs IP40 DALI PUSH

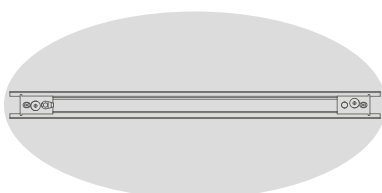

44°x90° optics

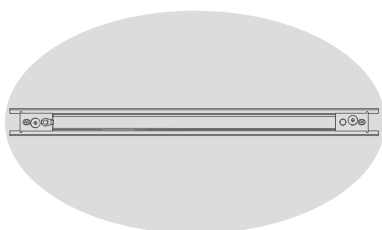

58°x99° optics

POWER / MODEL CODE	14W 120-277VAC
BS30101 00 D B	White
BS30101 00 D 6	Antique white
BS30101 00 D Z	Antique bronze
BS30101 00 D K	Matt aluminum grey
BS30101 00 D 8	Primer


CONTROL SYSTEM	O - on/off D - DALI+PUSH
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
LOWER OPTICS	L - 44°x90° K - 58°x99° D - diffuse
UPPER OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	1647 lm (3000K)
DELIVERED LUMEN OUTPUT	1432 lm (3000K, 44°x90° + diffuse)
NO. AND TYPE OF LED	84 mid-power LEDs 3-step MacAdam, 60000h L90 B10 (Ta 25°C)
MATERIAL	body and cover in anticorodal aluminum canopy in steel
POWER SUPPLY UNIT	built in
POWER CABLES	on/off: includes 8.2 ft PVC + PVC cable 2x0.75 Ø0.21 in DALI: includes 8.2 ft PVC + PVC cable 5x0.75 Ø0.26 in
MOUNTING	surface mounted (ceiling) with canopy
FEATURES	CRI >90
NOTES	indoor wall-mounted version: Berica IN 3, outdoor wall-mounted version: Berica OUT 3, non-standard lengths available on request single-beam version available on request Casambi-compatible version, controllable with the Casambi app, available on request





BERICA S 3.1



28W 120-277VAC

BS31101 ■ **00** ■ **D** ■ **B** White
BS31101 ■ **00** ■ **D** ■ **6** Antique white
BS31101 ■ **00** ■ **D** ■ **Z** Antique bronze Matt
BS31101 ■ **00** ■ **D** ■ **K** aluminum grey
BS31101 ■ **00** ■ **D** ■ **8** Primer

■ **0** - on/off
D - DALI+PUSH

■ **F** - 2700K
5 - 3000K
9 - 4000K

■ **L** - 44°x90°
K - 58°x99°
D - diffuse

diffuse

3312 lm (3000K)

2881 lm (3000K, 44°x90°+ diffuse)

180 mid-power LEDs
 3-step MacAdam, 60000h L90 B10 (Ta 25°C)

body and cover in anticorodal aluminum
 canopy in steel


built in

on/off: includes 8.2 ft PVC + PVC cable
 2x0.75 Ø0.21 in
 DALI: includes 8.2 ft PVC + PVC cable
 5x0.75 Ø0.26 in


surface mounted (ceiling) with ceiling rose

CRI >90

indoor wall-mounted version: Berica IN 3, outdoor
 wall-mounted version: Berica OUT 3, non-standard
 lengths available on request
 single-beam version available on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request

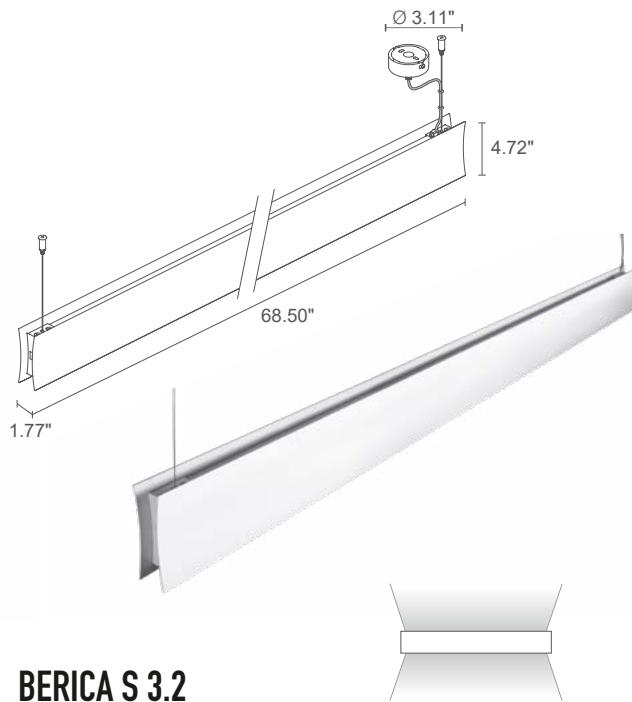

BERICA S 3.2



39W 120-277VAC

BS32101 ■ **00** ■ **D** ■ **B** White
BS32101 ■ **00** ■ **D** ■ **6** Antique white
BS32101 ■ **00** ■ **D** ■ **Z** Antique bronze Matt
BS32101 ■ **00** ■ **D** ■ **K** aluminum grey
BS32101 ■ **00** ■ **D** ■ **8** Primer

■ **0** - on/off
D - DALI+PUSH

■ **F** - 2700K
5 - 3000K
9 - 4000K

■ **L** - 44°x90°
K - 58°x99°
D - diffuse

diffuse

4747 lm (3000K)

4129 lm (3000K, 44°x90°+ diffuse)

270 mid-power LEDs
 3-step MacAdam, 60000h L90 B10 (Ta 25°C)

body and cover in anticorodal aluminum
 canopy rose in steel


built in

on/off: includes 8.2 ft PVC + PVC cable
 2x0.75 Ø0.21 in
 DALI: includes 8.2 ft PVC + PVC cable
 5x0.75 Ø0.26 in

surface mounted (ceiling) with ceiling rose

CRI >90

indoor wall-mounted version: Berica IN 3, outdoor
 wall-mounted version: Berica OUT 3, non-standard
 lengths available on request
 single-beam version available on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request




BERICA S

SUSPENDED FOR INDOOR APPLICATIONS

BERICA S 1.0


L - 44°x90°

Fc max (3000K)				cd/klm	max 817	— C0 - C180 — C90 - C270
H (ft)	Ø (ft)	Ø (ft)				
1.64	1.15	3.87	212.5			
3.28	2.33	7.78	53.1			
4.92	3.48	11.65	23.6			
6.56	4.66	15.55	13.3			
8.20	5.81	19.42	8.5			
9.84	6.96	23.33	6.0			




K - 58°x99°

Fc max (3000K)				cd/klm	max 744	— C0 - C180 — C90 - C270
H (m)	Ø (ft)	Ø (ft)				
1.64	1.28	3.94	178.1			
3.28	2.53	7.84	44.5			
4.92	3.81	11.78	19.8			
6.56	5.05	15.72	11.2			
8.20	6.33	19.62	7.2			
9.84	7.61	23.56	4.9			



D - Diffuse


Fc max (3000K)				cd/klm	max 519	— C0 - C180 — C90 - C270
H (ft)	Ø (ft)	Ø (ft)				
1.64	1.64	4.43	114.9			
3.28	3.28	8.86	28.7			
4.92	4.92	13.29	12.7			
6.56	6.53	17.72	7.2			
8.20	8.17	22.15	4.6			
9.84	9.81	26.57	3.2			



BERICA S 1.1


L - 44°x90°

Fc max (3000K)				cd/klm	max 817	— C0 - C180 — C90 - C270
H (ft)	Ø (ft)	Ø (ft)				
1.64	1.15	3.87	398.3			
3.28	2.33	7.78	99.6			
4.92	3.48	11.65	44.2			
6.56	4.66	15.55	24.9			
8.20	5.81	19.42	15.9			
9.84	6.96	23.33	11.1			




K - 58°x99°

Fc max (3000K)				cd/klm	max 744	— C0 - C180 — C90 - C270
H (ft)	Ø (ft)	Ø (ft)				
1.64	1.28	3.94	334.2			
3.28	2.53	7.84	83.5			
4.92	3.81	11.78	37.2			
6.56	5.05	15.72	20.9			
8.40	6.33	19.62	13.4			
9.84	7.61	23.56	9.3			



D - Diffuse


Fc max (3000K)				cd/klm	max 519	— C0 - C180 — C90 - C270
H (ft)	Ø (ft)	Ø (ft)				
1.64	1.64	4.43	216.4			
3.28	3.28	8.86	54.1			
4.92	4.92	13.29	24.1			
6.56	6.53	17.72	13.6			
8.40	8.17	22.15	8.6			
9.84	9.81	26.57	6.0			



BERICA S 1.2


L - 44°x90°

Fc max (3000K)				cd/klm	max 817	— C0 - C180 — C90 - C270
H (ft)	Ø (ft)	Ø (ft)				
1.64	1.15	3.87	561.0			
3.28	2.33	7.78	140.3			
4.92	3.48	11.65	62.3			
6.56	4.66	15.55	35.0			
8.40	5.81	19.42	22.5			
9.84	6.96	23.33	15.6			




K - 58°x99°

Fc max (3000K)				cd/klm	max 744	— C0 - C180 — C90 - C270
H (ft)	Ø (ft)	Ø (ft)				
1.64	1.28	3.94	471.3			
3.28	2.53	7.84	117.8			
4.92	3.81	11.78	52.4			
6.56	5.05	15.72	29.5			
8.40	6.33	19.62	18.9			
9.84	7.61	23.56	13.1			



D - Diffuse


Fc max (3000K)				cd/klm	max 519	— C0 - C180 — C90 - C270
H (m)	Ø (ft)	Ø (ft)				
1.64	1.64	4.43	304.3			
3.28	3.28	8.86	76.1			
4.92	4.92	13.29	33.8			
6.56	6.53	17.72	19.1			
8.40	8.17	22.15	12.2			
9.84	9.81	26.57	8.5			



BERICA S 2.0


L - 44°x90°

		Fc max (3000K)		cd/klm	max 760	
H (ft)	Ø (ft)	Ø (ft)				— C0 - C180 — C90 - C270
1.64	1.31	3.90	219.2			
3.28	2.59	7.81	54.8			
4.92	3.90	11.75	24.3			
6.56	5.18	15.65	13.7			
8.40	6.50	19.55	8.7			
9.84	7.81	23.46	6.1			




K - 58°x99°

		Fc max (3000K)		cd/klm	max 677	
H (ft)	Ø (ft)	Ø (ft)				— C0 - C180 — C90 - C270
1.64	1.61	3.87	184.0			
3.28	3.22	7.78	46.0			
4.92	4.82	11.65	20.4			
6.56	6.43	15.55	11.5			
8.40	8.04	19.42	7.3			
9.84	9.65	23.33	5.1			



D - Diffuse


		Fc max (3000K)		cd/klm	max 470	
H (ft)	Ø (ft)	Ø (ft)				— C0 - C180 — C90 - C270
1.64	2.23	4.17	116.7			
3.28	4.46	8.33	29.2			
4.92	6.66	12.50	13.0			
6.56	8.89	16.63	7.3			
8.40	11.12	20.80	4.7			
9.84	13.35	24.97	3.3			



BERICA S 2.1


L - 44°x90°

		Fc max (3000K)		cd/klm	max 760	
H (ft)	Ø (ft)	Ø (ft)				— C0 - C180 — C90 - C270
1.64	1.31	3.90	411.2			
3.28	2.59	7.81	102.8			
4.92	3.90	11.75	45.7			
6.56	5.18	15.65	25.7			
8.40	6.50	19.55	16.4			
9.84	7.81	23.46	11.4			




K - 58°x99°

		Fc max (3000K)		cd/klm	max 677	
H (ft)	Ø (ft)	Ø (ft)				— C0 - C180 — C90 - C270
1.64	1.61	3.87	346.0			
3.28	3.22	7.78	86.5			
4.92	4.82	11.65	38.5			
6.56	6.43	15.55	21.7			
8.40	8.04	19.42	13.8			
9.84	9.65	23.33	9.6			



D - Diffuse


		Fc max (3000K)		cd/klm	max 470	
H (ft)	Ø (ft)	Ø (ft)				— C0 - C180 — C90 - C270
1.64	2.23	4.17	218.0			
3.28	4.46	8.33	54.5			
4.92	6.66	12.50	24.3			
6.56	8.89	16.63	13.7			
8.40	11.12	20.80	8.7			
9.84	13.35	24.97	6.0			



BERICA S 2.2


L - 44°x90°

		Fc max (3000K)		cd/klm	max 760	
H (ft)	Ø (ft)	Ø (ft)				— C0 - C180 — C90 - C270
1.64	1.31	3.90	24W 576.1			
3.28	2.59	7.81	144.0			
4.92	3.90	11.75	64.0			
6.56	5.18	15.65	36.1			
8.40	6.50	19.55	23.0			
9.84	7.81	23.46	16.0			




K - 58°x99°

		Fc max (3000K)		cd/klm	max 677	
H (ft)	Ø (ft)	Ø (ft)				— C0 - C180 — C90 - C270
1.64	1.61	3.87	485.7			
3.28	3.22	7.78	121.4			
4.92	4.82	11.65	54.0			
6.56	6.43	15.55	30.4			
8.40	8.04	19.42	19.4			
9.84	9.65	23.33	13.5			




D - Diffuse


		Fc max (3000K)		cd/klm	max 470	
H (ft)	Ø (ft)	Ø (ft)				— C0 - C180 — C90 - C270
1.64	2.23	4.17	305.9			
3.28	4.46	8.33	76.5			
4.92	6.66	12.50	34.0			
6.56	8.89	16.63	19.1			
8.40	11.12	20.80	12.3			
9.84	13.35	24.97	8.5			




BERICA S 3.0

L - 44°x90°

Fc max (3000K)				cd/klm max 716	C0 - C180 C90 - C270
H (ft)	Ø (ft)	Ø (ft)			
1.64	1.35	3.90	218.1		
3.28	2.66	7.81	54.5		
4.92	4.00	11.71	24.3		
6.56	5.31	15.62	13.7		
8.40	6.66	19.52	8.7		
9.84	7.97	23.43	6.0		


Fc max (3000K)				cd/klm max 422	C0 - C180 C90 - C270
H (ft)	Ø (ft)	Ø (ft)			
1.64	3.08	4.10	115.3		
3.28	6.20	8.17	28.8		
4.92	9.28	12.27	12.8		
6.56	12.40	16.37	7.3		
8.40	15.49	20.47	4.7		
9.84	18.60	24.54	3.2		


K - 58°x99°

Fc max (3000K)				cd/klm max 625	C0 - C180 C90 - C270
H (ft)	Ø (ft)	Ø (ft)			
1.64	1.84	3.87	182.9		
3.28	3.67	7.71	45.7		
4.92	5.51	11.58	20.4		
6.56	7.35	15.45	11.4		
9.40	9.15	19.29	7.3		
9.84	10.99	23.16	5.1		


BERICA S 3.1

L - 44°x90°

Fc max (3000K)				cd/klm max 716	C0 - C180 C90 - C270
H (ft)	Ø (ft)	Ø (ft)			
1.64	1.35	3.90	410.8		
3.28	2.66	7.81	102.7		
4.92	4.00	11.71	45.6		
6.56	5.31	15.62	25.6		
8.40	6.66	19.52	16.4		
9.84	7.97	23.43	11.4		


Fc max (3000K)				cd/klm max 422		C0 - C180 C90 - C270
H (ft)	Ø (ft)	Ø (ft)				
1.64	3.08	4.10	215.8			
3.28	6.20	8.17	54.0			
4.92	9.28	12.27	24.0			
6.56	12.40	16.37	13.5			
8.40	15.49	20.47	8.6			
9.84	18.60	24.54	6.0			


K - 58°x99°

Fc max (3000K)					cd/Klm max 625	C0 - C180 C90 - C270
H (ft)	Ø (ft)	Ø (ft)				
1.64	1.84	3.87	343.7			
3.28	3.67	7.71	85.9			
4.92	5.51	11.58	38.2			
6.56	7.35	15.45	21.5			
8.40	9.15	19.29	13.8			
9.84	10.99	23.16	9.6			


BERICA S 3.2

L - 44°x90°

Fc max (3000K)				cd/Klm max 716	C0 - C180 C90 - C270
H (ft)	Ø (ft)	Ø (ft)			
1.64	1.35	3.90	574.7		
3.28	2.66	7.81	143.7		
4.92	4.00	11.71	63.8		
6.56	5.31	15.62	36.0		
8.40	6.66	19.52	23.0		
9.84	7.97	23.43	16.0		

Fc max (3000K)				cd/klm max 422	C0 - C180 C90 - C270
H (ft)	Ø (ft)	Ø (ft)			
1.64	3.08	4.10	303.4		
3.28	6.20	8.17	75.8		
4.92	9.28	12.27	33.7		
6.56	12.40	16.37	19.0		
8.40	15.49	20.47	12.2		
9.84	18.60	24.54	8.5		

K - 58°x99°

Fc max (3000K)				cd/klm max 625	C0 - C180 C90 - C270
H (m)	Ø (ft)	Ø (ft)			
1.64	1.84	3.87	482.0		
3.28	3.67	7.71	120.5		
4.92	5.51	11.58	53.5		
6.56	7.35	15.45	30.1		
8.40	9.15	19.29	19.3		
9.84	10.99	23.16	13.4		

