

calib

design by Landa R&D

FOR A GREEN SCENARIO.



calib

The perfection of light in a T shape available in three heights 23.6", 35.4" or 47.2". Calib has a diffused light emission obtained via an opal polycarbonate screen, with a power of up to 16W. Ideal for lighting paths and access roads, it is a robust device thanks to treatment of the wooden body through acetylation resistant to water and wear and tear.



calib

BOLLARD



Wattage 16W

Voltage Remote 500mA

Beam 

TECHNICAL SPECIFICATIONS

Source lamp	LED 11W
Total wattage	16W
Voltage	500mA, 50-60 Hz
Control	On/Off
Light color	3000K • other colors on request
Luminous flux (*Source flux)	1084 lm (1518 lm*)
Luminous efficacy	68 lm/W
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

DIFFUSE



LED 11W
16W
500mA, 50-60 Hz
On/Off
3000K • other colors on request
1084 lm (1518 lm*)
68 lm/W
3
Diffuse
> 90
L70 > 50.000 h Ta 40°C
IP65
IK08

MATERIALS

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

ORDER CODE

CA 90	_____	DHBBZ3	
	_____	Height	
	060		23.62"
	090		35.43"
	120		47.24"
		Example	CA 90 060 DHBBZ3

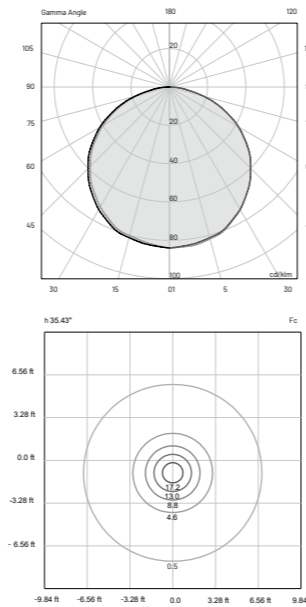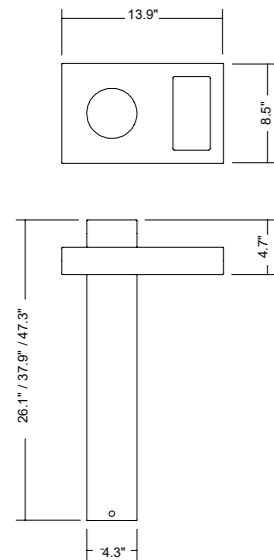

INCLUDED ACCESSORIES

Code	Description
-	Single connection IP68
-	Root mounting kit

