

calib

design by Landa R&D

FOR A GREEN SCENARIO.



calib

The perfection of light in a T shape available in three heights 23.6", 35.4" or 47.2". Calib has a diffused light emission obtained via an opal polycarbonate screen, with a power of up to 16W. Ideal for lighting paths and access roads, it is a robust device thanks to treatment of the wooden body through acetylation resistant to water and wear and tear.



calib

BOLLARD



Wattage 16W

Voltage Remote 500mA

Beam 

TECHNICAL SPECIFICATIONS

| | |
|------------------------------|---------------------------------|
| Source lamp | LED 11W |
| Total wattage | 16W |
| Voltage | 500mA, 50-60 Hz |
| Control | On/Off |
| Light color | 3000K • other colors on request |
| Luminous flux (*Source flux) | 1084 lm (1518 lm*) |
| Luminous efficacy | 68 lm/W |
| McADAM steps | 3 |
| Beam | Diffuse |
| CRI | > 90 |
| Life time | L70 > 50.000 h Ta 40°C |
| IP rating | IP65 |
| IK rating | IK08 |

DIFFUSE



| |
|---------------------------------|
| LED 11W |
| 16W |
| 500mA, 50-60 Hz |
| On/Off |
| 3000K • other colors on request |
| 1084 lm (1518 lm*) |
| 68 lm/W |
| 3 |
| Diffuse |
| > 90 |
| L70 > 50.000 h Ta 40°C |
| IP65 |
| IK08 |

MATERIALS

| | |
|-----------|---------------------------------|
| Body | Accoya® wood and inox AISI 316L |
| Diffuser | Opal polycarbonate |
| Finishing | Acetylation treatment |

ORDER CODE

| | | | |
|-------|-------|---------|-------------------------|
| CA 90 | _____ | DHBBZ3 | |
| | _____ | Height | 060 23.62" |
| | | | 090 35.43" |
| | | | 120 47.24" |
| | | Example | CA 90 060 DHBBZ3 |

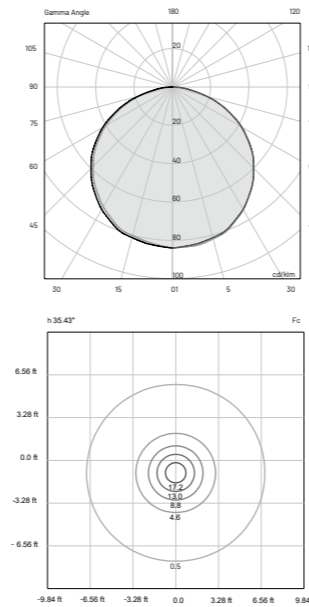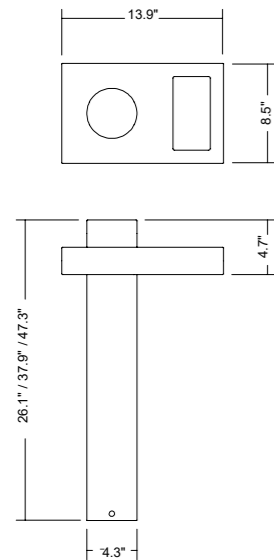

INCLUDED ACCESSORIES

| Code | Description |
|------|------------------------|
| - | Single connection IP68 |
| - | Root mounting kit |

