


DUVALI MINI is a square LED bollard made of Accoya®, a sustainable, highly durable wood treated with Acetylation treatment. It is 2.8" square and has a height of 13.8" with 1.5W and diffuse optics. 25 year warranty on Accoya® Wood - 5 year warranty on lighting element.



TECHNICAL DATA

Wattage	1.5W LED, 1.5W Total
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Accoya® Wood and Inox AISI 316L Lens: Opal Polycarbonate
CCT	3000K
CRI	>90
Delivered Lumens	65 lm
Efficacy	44 lm/W
Optics	Diffuse
Finishes	Accoya® - Acetylation treatment
Fixture Dimensions	2.8" Sq. x 13.8" h
Lumen Maintenance	L70 >50,000hrs (Ta 25°C) L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions



ORDERING INFORMATION

Example: LNDV40035DHB7Z3.US.

LNDV	40035	D	HB7Z3	US
Model No. LNDV	Size 40035 - 13.8" height	Optics D - Diffuse	Power HB7Z3 - Remote	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00128	Non-Dim	120VAC to 24VDC, 6W, Class 2, IP65	1-3
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-6
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-16
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-32
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2, IP20	1-51
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-53
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	6-53

For other power supply options consult factory.


ACCESSORIES - Installation

(included)

Root Mounting Kit**Single Connection IP68****PHOTOMETRIC DATA**

Note: All photometric data is 3000K

Maximum Candela = 22.3

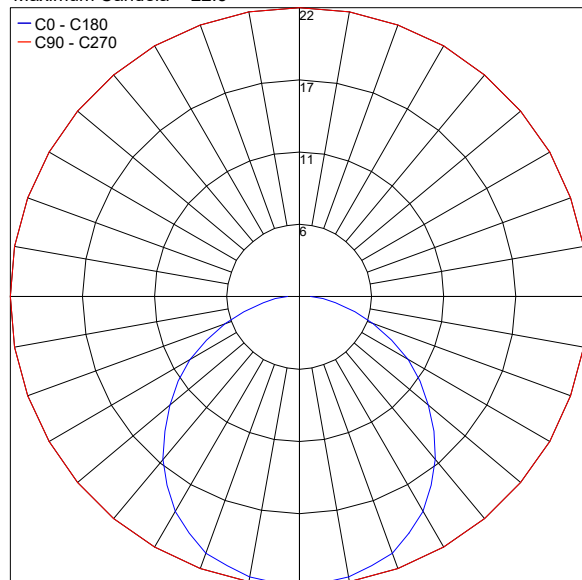

PHOTOMETRIC FILENAME : DUVALI MINI_DV40035DHB7Z3.IES

Job Name/Date:

Fixture Type Designation: