

DUVALI MINI is a square LED bollard made of Accoya®, a sustainable, highly durable wood treated with Acetylation treatment. It is 2.8" square and has a height of 13.8" with 1.5W and diffuse optics. 25 year warranty on Accoya® Wood - 5 year warranty on lighting element.



## TECHNICAL DATA

<b>Wattage</b>	1.5W LED, 1.5W Total
<b>Power Supply</b>	Remote 24VDC, not included. See page 2.
<b>Construction</b>	Body: Accoya® Wood and Inox AISI 316L Lens: Opal Polycarbonate
<b>CCT</b>	3000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	65 lm
<b>Efficacy</b>	44 lm/W
<b>Optics</b>	Diffuse
<b>Finishes</b>	Accoya® - Acetylation treatment
<b>Fixture Dimensions</b>	2.8" Sq. x 13.8" h
<b>Lumen Maintenance</b>	L70 >50,000hrs (Ta 25°C) L70 >50,000hrs (Ta 40°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK08

Fixture Dimensions



## ORDERING INFORMATION

Example: LNDV40035DHB7Z3.US.

<b>LNDV</b>	<b>40035</b>	<b>D</b>	<b>HB7Z3</b>	<b>US</b>
<b>Model No.</b> LNDV	<b>Size</b> 40035 - 13.8" height	<b>Optics</b> D - Diffuse	<b>Power</b> HB7Z3 - Remote	<b>US</b>

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00128</a>	Non-Dim	120VAC to 24VDC, 6W, Class 2, IP65	1-3
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-6
<a href="#">PPLT00155</a>	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-16
<a href="#">PPLT00586</a>	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-21
<a href="#">PPLT00158</a>	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-53
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	6-53

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00273</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-21
<a href="#">PPLT00530</a>	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-51

For other power supply options consult factory.

## ACCESSORIES - Installation

(included)

### Root Mounting Kit

### Single Connection IP68


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 22.3

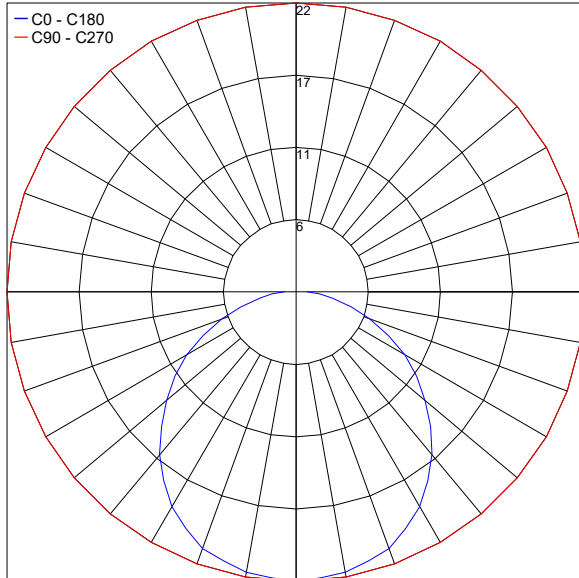

PHOTOMETRIC FILENAME : DUVALI MINI\_DV40035DHB7Z3.IES

Job Name/Date:

Fixture Type Designation: