


DUVALI MINI is a square LED bollard made of Accoya®, a sustainable, highly durable wood treated with Acetylation treatment. It is 2.8" square and has a height of 13.8" with 1.5W and diffuse optics. 25 year warranty on Accoya® Wood - 5 year warranty on lighting element. Dark Sky compliant, output below 80°



TECHNICAL DATA

Wattage	1.5W
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Accoya® Wood and Inox AISI 316L Lens: Opal Polycarbonate
CCT	2700K, 3000K
CRI	>90
Delivered Lumens	65 lm (3000K) Dark Sky Compliant, output below 80°
Efficacy	44 lm/W
Optics	Diffuse
Finishes	Accoya® - Acetylation treatment in Clear or Gray
Fixture Dimensions	2.8" Sq. x 13.8" h
Fixture Weight	1.54 lbs
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions



ORDERING INFORMATION

Example: **LNDV40035DHB7Z3.US**.

LNDV	40035	D		B7Z		US
Model No.	Size	Optics	CCT	Power	Finish	
LNDV	40035 - 13.8" height	D - Diffuse	Y - 2700K H - 3000K	B7Z - Remote	3 - Accoya® Clear 4 - Accoya® Gray	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00128	Non-Dim	120VAC to 24VDC, 6W, Class 2, IP65	1-3
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-6
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-16
PPLT00586	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-21
PPLT00709	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-51
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	6-53

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-21
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-51

For other power supply options consult factory.

ACCESSORIES - Installation

(included)


Root Mounting Kit

Single Connection IP68

PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 22.3

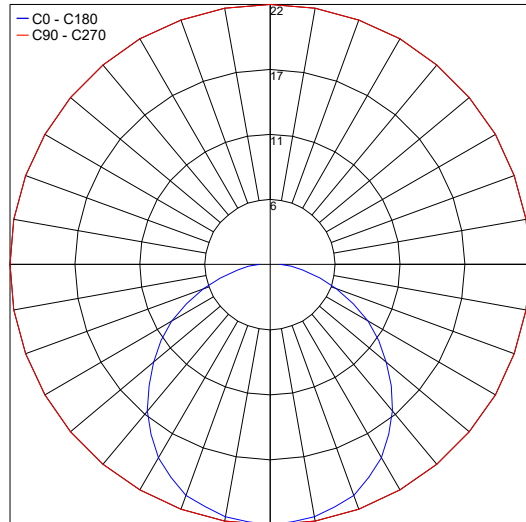

PHOTOMETRIC FILENAME : DUVALI MINI_DV40035DHB7Z3.IES

Job Name/Date:

Fixture Type Designation: