


DUVALI is a square LED bollard made of Accoya®, a sustainable, highly durable wood treated with Acetylation treatment. It is available in 3 different heights with 8W total power and diffuse optics. 25 year warranty on Accoya® Wood - 5 year warranty on lighting element. Dark Sky compliant for output below 80°.



TECHNICAL DATA

Wattage	5.5W LED, 8W Total
Power Supply	Remote 350m, not included. See page 2.
Construction	Body: Accoya® Wood and Inox AISI 316L Lens: Opal Polycarbonate
CCT	3000K
BUG Rating	B0-U2-G1
CRI	>90
Delivered Lumens	542 lm Dark Sky compliant, output below 80°
Efficacy	68 lm/W
Optics	Diffuse
Finishes	Accoya® - Acetylation treatment
Fixture Dimensions	4.7" Sq. x 23.6" / 35.4" / 47.2" h
Lumen Maintenance	L70 >50,000hrs (Ta 25°C) L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions



ORDERING INFORMATION

Example: LNDV60060DHBBZ3.US.

LNDV		D	HBBZ3	US
Model No.	Size	Optics	Power	
LNDV	60060 - 23.6" height 60090 - 35.4" height 60120 - 47.2" height	D - Diffuse	HBBZ3	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00211	Non-Dim	120VAC to 350mA, 10W, Class 2	2-2
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2	1-2
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	2-3
PPLT00214	0-10V Dimming to 10%	120-277VAC to 350mA, 30W, Class 2, IP66	4-7
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	3-3
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-4
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W Class 2	1-4 (1-16)

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-3
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	4-4

For other power supply options consult factory.

ACCESSORIES - Installation

(included)


Root Mounting Kit

Single Connection IP68

PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 533.4

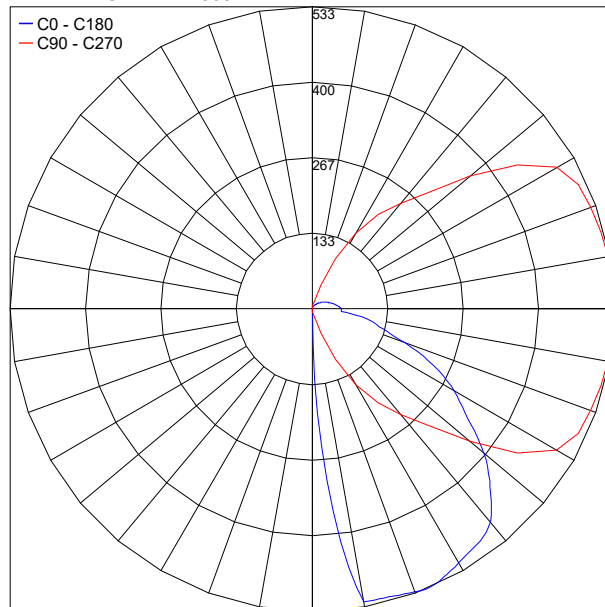

PHOTOMETRIC FILENAME : DUVALI_DV60XXDHB103.IES

Job Name/Date:

Fixture Type Designation: