


DUVALI is a square LED bollard made of Accoya®, a sustainable, highly durable wood treated with Acetylation treatment. It is available in 3 different heights with 8W total power and diffuse optics. 25 year warranty on Accoya® Wood - 5 year warranty on lighting element. Dark Sky compliant for output below 80°.



## TECHNICAL DATA

<b>Wattage</b>	8W
<b>Power Supply</b>	Remote 350m, not included. See page 2.
<b>Construction</b>	Body: Accoya® Wood and Inox AISI 316L Lens: Opal Polycarbonate
<b>CCT</b>	2700K, 3000K
<b>BUG Rating</b>	B0-U2-G1
<b>CRI</b>	>90
<b>Delivered Lumens</b>	542 lm (3000K) Dark Sky Compliant, output below 80°
<b>Efficacy</b>	68 lm/W
<b>Optics</b>	Diffuse
<b>Finishes</b>	Accoya® - Acetylation treatment in Clear or Gray
<b>Fixture Dimensions</b>	4.7" Sq. x 23.6" / 35.4" / 47.2" h
<b>Fixture Weight</b>	7.72 lbs (23.6" height) 9.48 lbs (35.4" height) 15.87 lbs (47.2" height)
<b>Lumen Maintenance</b>	L70 >50,000hrs (Ta 40°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK08

Fixture Dimensions



## ORDERING INFORMATION

Example: LNDV60060DHBBZ3.US.

LNDV		D		BBZ		US
<b>Model No.</b>	<b>Size</b>	<b>Optics</b>	<b>CCT</b>	<b>Power</b>	<b>Finish</b>	
LNDV	60060 - 23.6" height 60090 - 35.4" height 60120 - 47.2" height	D - Diffuse	Y - 2700K H - 3000K	BBZ - Remote	3 - Accoya® Clear 4 - Accoya® Gray	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00211</a>	Non-Dim	120VAC to 350mA, 10W, Class 2	2-2
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2	1-2
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	2-3
<a href="#">PPLT00214</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 30W, Class 2, IP66	4-7
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	3-3
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-4
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W Class 2	1-4 (1-16)

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-3
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	4-4

For other power supply options consult factory.

## ACCESSORIES - Installation


(included)

Root Mounting Kit

Single Connection IP68

## PHOTOMETRIC DATA

Note: All photometric data is 3000K

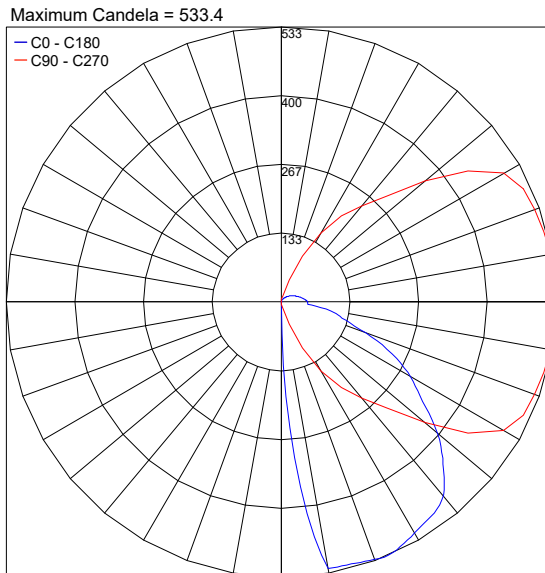

PHOTOMETRIC FILENAME : DUVALI\_DV60XXXDHB103.IES

Job Name/Date:

Fixture Type Designation: