

duvali

design by Landa R&D

EDEN OF LIGHT.



duvali

Duvali, the lighting device for paths with a power of 1.5/2.5W (Duvali_mini) and 8W (Duvali) has an evocative and elegant shape. A bollard made in Accoya® timber available with a height of 13.8", 23.6", 35.4" and 47.2". Duvali is absolute three-dimensionality, solidity and perfect light distribution. No design limit and maximum possible resistance, thanks to the technical solutions adopted.




duvali_mini

BOLLARD




Wattage	1.5W
Voltage	24VDC
Beam	



TECHNICAL SPECIFICATIONS

Source lamp	DIFFUSE 1.5W
Total wattage	LED 1.5W
Voltage	1.5W
Control	24VDC
Light color	On/Off
Luminous flux(*Source flux)	3000K • other colors on request
Luminous efficacy	65 lm (137 lm*)
McADAM steps	44 lm/W
Beam	3
CRI	Diffuse
Life time	> 90
IP rating	L70 > 50.000 h Ta 40°C
IK rating	IP65
	IK08

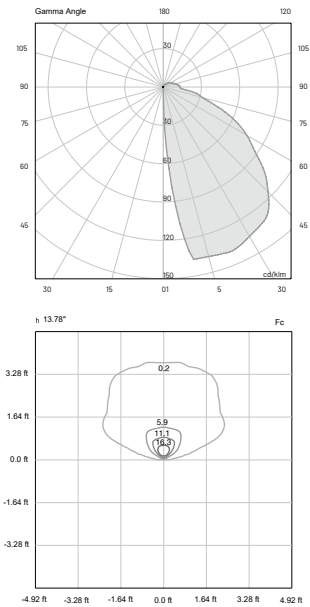

MATERIALS

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

ORDER CODE

DV 4 0 035 D H B _ _ 3	
	Voltage 7Z 24VDC
Example	DV 4 0 035 D H B 7Z 3

INCLUDED ACCESSORIES

Code	Description
-	Single connection IP68
-	Root mounting kit

duvali

BOLLARD




Wattage	8W
Voltage	Remote 350mA
Beam	



TECHNICAL SPECIFICATIONS

Source lamp	LED 5.5W
Total wattage	8W
Voltage	350mA, 50-60 Hz
Control	On/Off
Light color	3000K • other colors on request
Luminous flux(*Source flux)	542 lm (759 lm*)
Luminous efficacy	68 lm/W
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

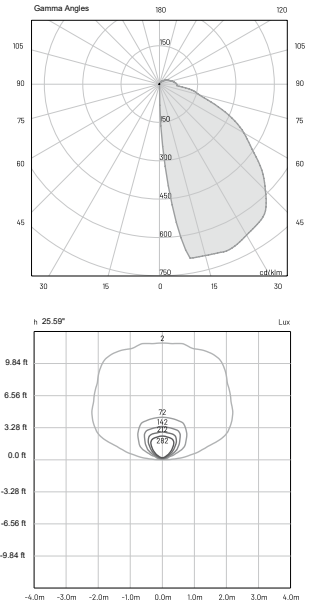

MATERIALS

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

ORDER CODE

DV 6 0	D H B 1 0 3		
	Height	060	23.62"
		090	35.43"
		120	47.24"
	Example	DV 6 0 060 D H B 1 0 3	

INCLUDED ACCESSORIES

Code	Description
-	Single connection IP68
-	Root mounting kit

