


Flexview is a 24" square, recessed lay-in, picture luminaire with a dual light engine, that can be installed in multiple configurations to create the effect of a sky with clouds. It is suitable for installation in indoor spaces such as classrooms, offices, corridors, waiting rooms, receptions areas, and retail spaces.


## TECHNICAL DATA

<b>Wattage</b>	Multiple Wattage Ranges (see chart page 3) - Selectable During Installation using Switch
<b>Power Supply</b>	Integral 120-277VAC (requires 2 drivers)
<b>Construction</b>	Frame: Extruded, Anodized Aluminum Dual Light Engine: Perimeter Engine for Main, Secondary Engine for Picture Window Optical System: Reflector, Collimator and Nanoprism Lens Image Screen: Printed 0.06" Polycarbonate TP(a) Fire Retardant
<b>CCT</b>	4000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	Various Based on Wattage Configuration (see chart on page 3)
<b>Efficacy</b>	Various Based on Wattage Configuration
<b>Optics</b>	—
<b>Finishes</b>	Unfinished
<b>Lumen Maintenance</b>	100,000 hrs L80, B10
<b>Fixture Dimensions</b>	23.5" l x 23.5" w x 2.4" h
<b>Fixture Weight</b>	9.9-158.7 lbs. based on number of panels
<b>IP Rating</b>	IP20

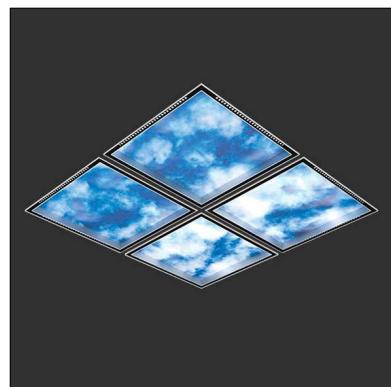

Configuration of 4 panels

Fixture Dimensions

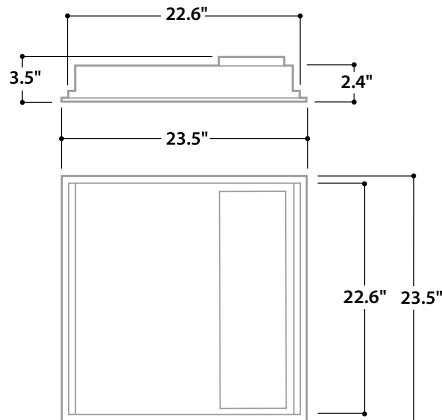

## ORDERING INFORMATION

Example: FV1812S.B.L.US.

		L	US
--	--	---	----

Model No.	Reflector	Circui	
<b>FV0606S</b> (23.6" x 23.6")	<b>B</b> - Black	<b>L</b>	<b>US</b>
<b>FV1212S</b> (47.3" x 47.3")	<b>M</b> - Metallized		
<b>FV1812S</b> (71.0" x 47.3")	<b>W</b> - White		
<b>FV1224S</b> (47.3" x 94.4")			
<b>FV2424S</b> (94.4" x 94.4")			


Job Name/Date:

Fixture Type Designation:


## CONFIGURATIONS



Construction Breakout (see catalog for description)

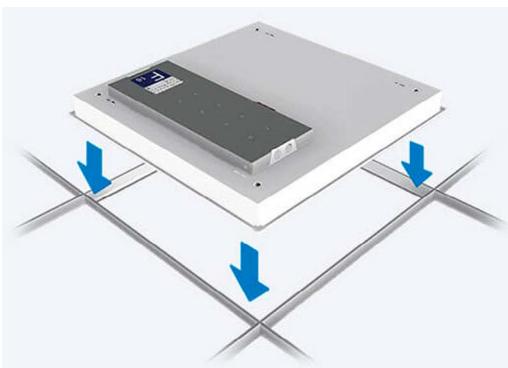

Dual Light Engine

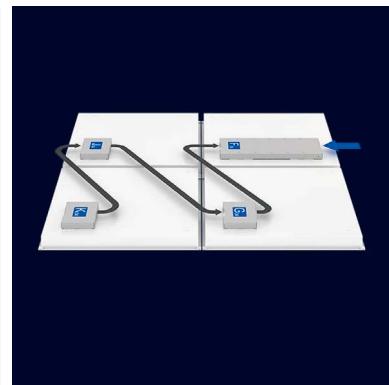


Single Power Connection

## PHOTOMETRIC DATA


Note all Photometry is 4000K

Maximum Candela = 2207.4

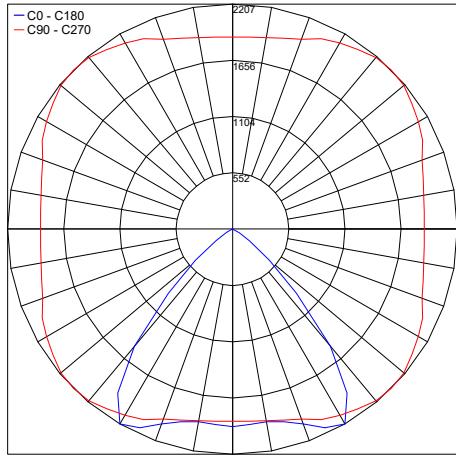


Black Reflector

Maximum Candela = 3116.2

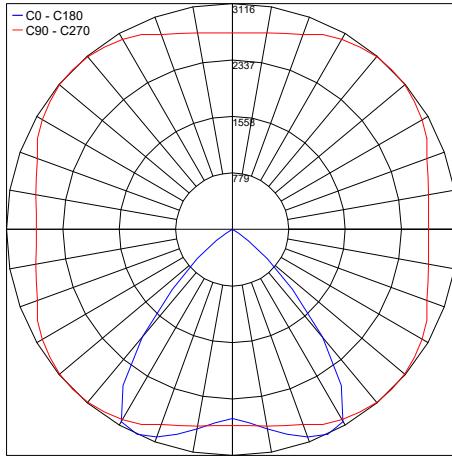

Metal Reflector

Maximum Candela = 2572.4

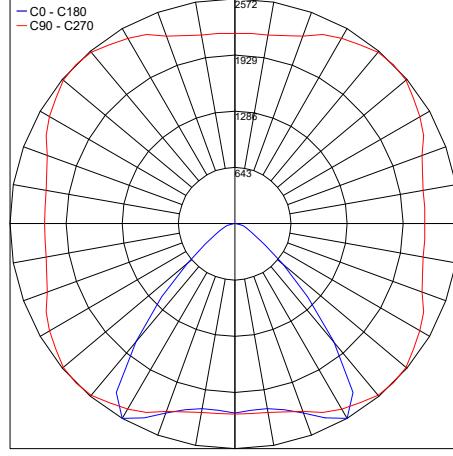

White Reflector

Job Name/Date:

Fixture Type Designation: